




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

ALL METAL PARTS SILVER PLATED

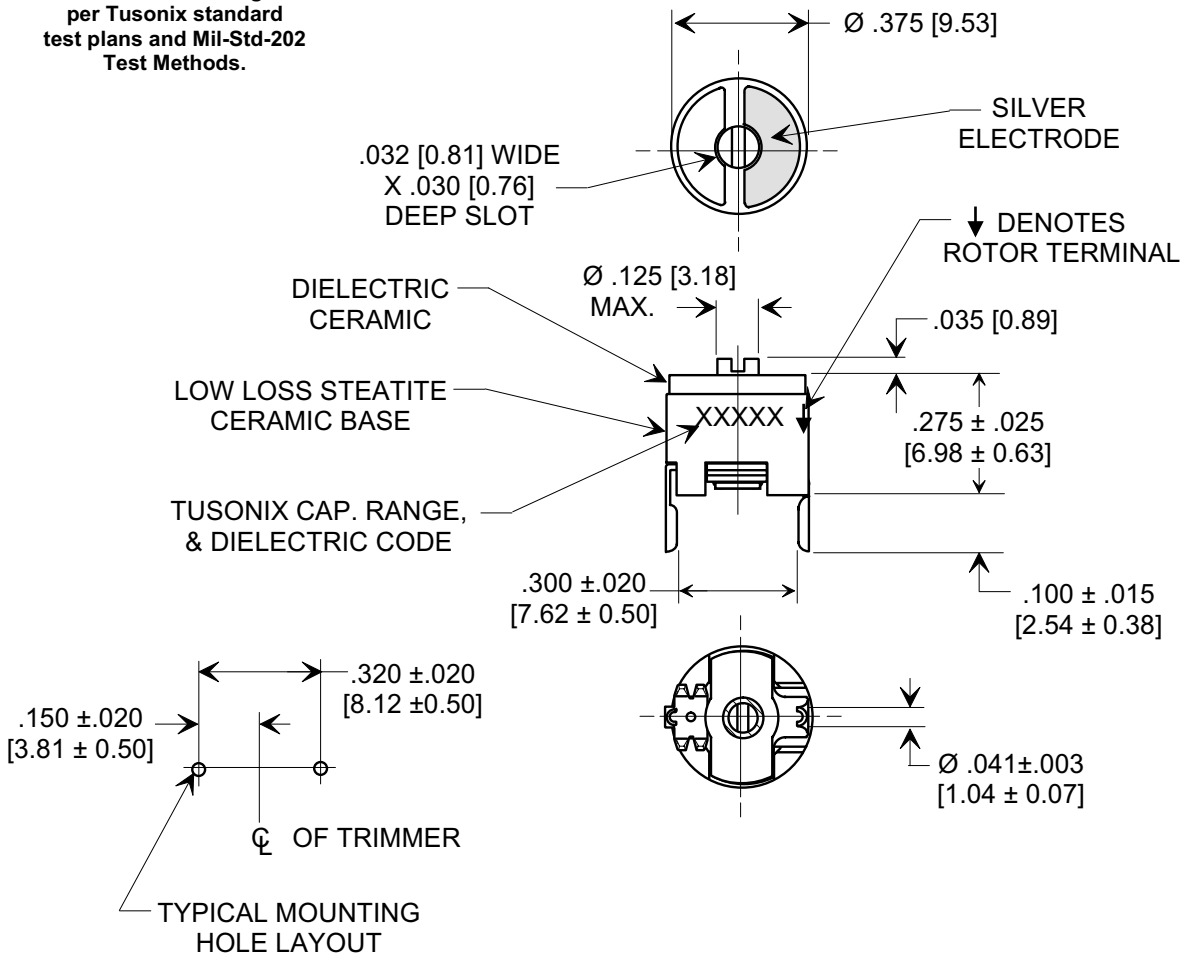

ORDERING INFORMATION

Tusonix Style	538-016
Capacitance	9.0 - 35 pF
Capacitance Tol.	MIN . + 10%, MAX. -10% , +50%
Dielectric Type Code	D
Voltage Rating	200 VDC TO + 85°C, 100VDC TO +125°C
DWV	500 VDC
IR Min.	10 Gohms
Operating Temperature Range:	-55°C TO + 125°C
To Tusonix Spec Unless Stated Otherwise	

NOTES:

1. TUSONIX STANDARD
PART NUMBER: 0538-016-D-9.0-35.
TUSONIX RoHS COMPLIANT
PART NUMBER: 0538-016-D-9.0-35 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. ALL METAL PARTS SILVER PLATED.
3. PART MARKING: TUSONIX TRADEMARK, CAPACITANCE RANGE, AND DIELECTRIC CODE; STANDARD PART, BLACK INK; RoHS PART, GREEN INK.
4. NOTE: TORQUE 1-6 oz.in.

X-2015 Rev-0

REVISION RECORD Original Release C.O. 20030807-1-01 ADDED NOTES 1-3. S.M. 06-05-06 20060524-2-03	TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± 3 PLC. DECIMAL ± .010 [0.25]		Title CERAMIC TRIMMER	
	ANGLES ± 10°		Drawn E.C. 08-07-03	
	TUSONIX TUCSON, ARIZONA		Approved T.C. 08-07-03	
	A		538-016 D 9.0 - 35	