



PARAMETER		UNITS
Impedance Primary /Secondary	600/600	Ω
Primary DC Resistance	65	Ω
Secondary DC Resistance	85	Ω
Maximum Power	+ 7	dBm
DC Current	0	mA
Frequency Response 300 - 3500Hz	± 2.5	dB
Insertion Loss @ 1kHz	2.5	dB
Longitudinal Balance (min)	60	dB
Isolation (min)	1500	V _{rms}

Audio Matching Transformer

Schematic Diagram

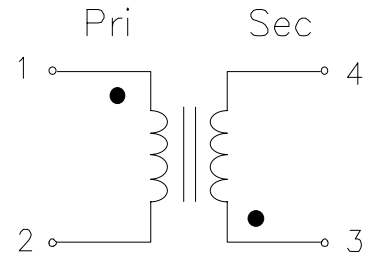

Physical Dimensions inches (mm)

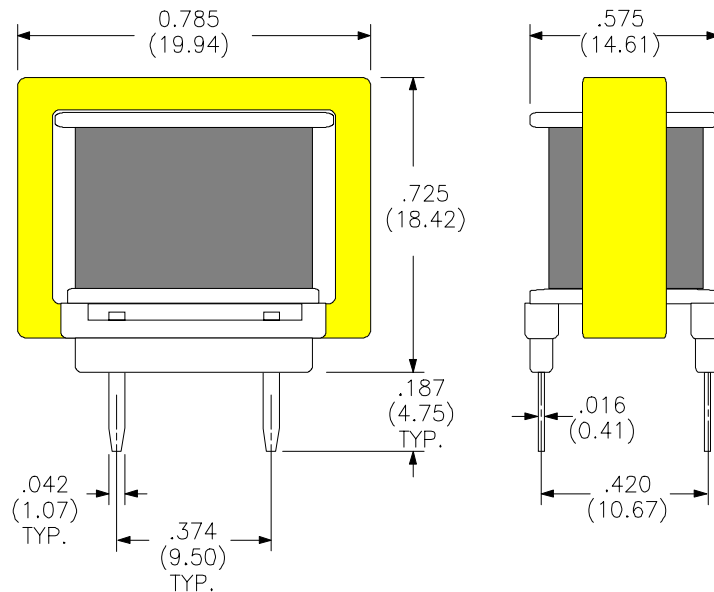

Rhombus P/N: **T- 699**

Cust. P/N:

Name:

Date: **9/19/95**

Sheet: 1 of 1