



ST CONNECTORS



ST CONNECTORS



Amphenol's 953 Series fiber optic ST and STII connector utilizes a bayonet style mating concept to provide a secure, robust coupling mechanism. The enclosed spiral slotted coupling nut allows easy insertion in densely packed patch panels.

The ST connector has been used extensively in telecom, data premise installation, and test lab applications. Special attention has been given to every ST performance parameter, increasing product repeatability and exceeding industry standards. The ST connector is available with a plastic or die cast body with a ceramic or stainless steel ferrule.

Features and Benefits

- The ST connector body and coupling nut are precision molded with a flame retardant polymer for a durable and light weight product
- The STII connector body and coupling nut are precision zinc die cast and nickel plated for superior strength and corrosion resistance
- High precision zirconia ferrules minimize insertion loss and return loss values
- Available in singlemode and multimode versions
- Available with 900 μ m, 2.0mm, or 3.0mm, 45/90 degree, and flex boots
- Stainless steel ferrules also available on both the ST and STII connector

Amphenol
FIBER OPTIC PRODUCTS

Specifications

- Insertion Loss:** ≤ 0.15 dB typical, singlemode
 ≤ 0.25 dB typical, multimode
- Return Loss:** Ultra (UPC) ≤ -55 dB*
- Durability:** < 0.2 dB change, 500mating cycles
- Temperature:** < 0.3 dB change, -40 to $+85^{\circ}$ C

Intermateability:

Amphenol 953 Series ST connectors are mechanically and optically intermateable with NTT- FC type products and conform to TIA/EIA and IEC specifications.


*Performance is polish dependent






ST Connector Ordering Information


Part # (ST II with Ceramic Ferrule)	Description	Ferrule Hole Size	Recommended Cable Diameter	Body and Nut Material	Boot Color
953-101-5306-P	STII Connector, Singlemode, 126 μ m Zirconia Ferrule	126 μ m	3mm or 900 μ m	Die-cast	Black
953-101-5310-P	STII Connector, Multimode, 128 μ m Zirconia Ferrule	128 μ m	3mm or 900 μ m	Die-cast	Black
953-101-5316-P	STII Connector, Singlemode, 126 μ m Zirconia Ferrule	126 μ m	2mm	Die-cast	Black
953-101-5309-P	STII Connector, Multimode, 128 μ m Zirconia Ferrule	128 μ m	2mm	Die-cast	Black
Part # (ST II with Stainless Steel Ferrule)					
953-106-50128-P	STII Connector, Multimode, 128 μ m Stainless Steel Ferrule	128 μ m	3mm or 900 μ m	Die-cast	Black
953-106-50144-P	STII Connector, Multimode, 144 μ m Stainless Steel Ferrule	144 μ m	3mm or 900 μ m	Die-cast	Black
953-106-50231-P	STII Connector, Multimode, 231 μ m Stainless Steel Ferrule	231 μ m	3mm or 900 μ m	Die-cast	Black
Part # (ST with Ceramic Ferrule)					
953-101-5006-P	ST Connector, Singlemode, 126 μ m Zirconia Ferrule	126 μ m	3mm or 900 μ m	Plastic	Plastic
953-101-5010-P	ST Connector, Multimode, 128 μ m Zirconia Ferrule	128 μ m	3mm or 900 μ m	Plastic	Plastic
Part # (ST with Stainless Steel Ferrule)					
953-107-50128-P	ST Connector, Multimode, 128 μ m Stainless Steel Ferrule	128 μ m	3mm or 900 μ m	Plastic	Black
953-107-50144-P	ST Connector, Multimode, 144 μ m Stainless Steel Ferrule	144 μ m	3mm or 900 μ m	Plastic	Black
953-107-50231-P	ST Connector, Multimode, 231 μ m Stainless Steel Ferrule	231 μ m	3mm or 900 μ m	Plastic	Black

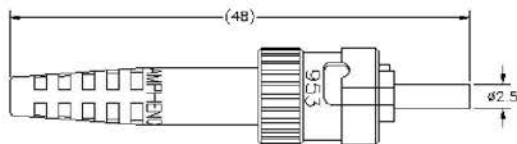


ST Connector with 3.0mm Boot

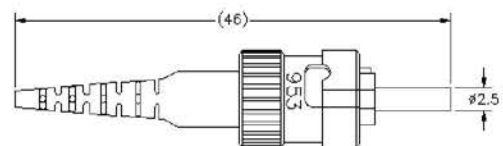


ST Connector with 900 μ m Boot

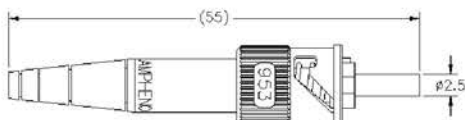

STII Connector with 2.0mm Boot

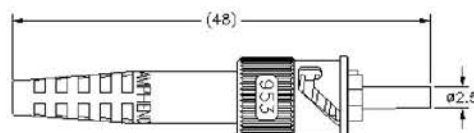

STII Connector with 3.0mm Boot

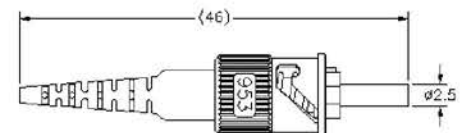

STII Connector with 900 μ m Boot

ST VARIATIONS



ST



STII



STII Long Body

Connector Body



High Performance



Standard



Short



45°



90°



Flex Boot

Boots

Amphenol
FIBER OPTIC PRODUCTS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[953-101-5310-P](#) [953-101-5306-P](#) [953-101-5006-P](#) [953-101-5309-P](#) [953-106-50144-P](#)