DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

| REVISIONS | | | 2-0008 | SH 1 |
|---|---|---|---|---|
| REV | ECO | DESCRIPTION | DWN | APPROVED | DATE |
| AB | 10675 | ADDED -55; SEE ECO | DKC | | |

| DASH NO | CABLES ACCOMMODATED | ASSEMBLE PER |
|---|---|---|
| -8 | 8227 BELDEN | TAI-140 |
| -9 | TWC-78-2/TWC-24-2 | TAI-121 |
| -10 | RG-22/754E AT&T | TAI-140 |
| -11 | 760 AT&T | |
| -12 | 16 PEVL AT&T/ VI/AL GENERAL | TAI-139 |
| -25 | T-43M GENERAL | TAI-121 |
| -27 | 202-3927 MICRODOT | |
| -29 | TWC-78-1/TWC-24-1A | |
| -46 | 9860 BELDEN | TAI-140 |
| -47 | M17/176-00002 | TAI-121 |
| -49 | TWAC-78-1F2 | |
| -54 | 89207 BELDEN | TAI-140 |
| -55 | 89272 BELDEN | TAI-121 |

FIG 1 ④




-9 SHOWN

-9,-25,-27,-29,-47 & -49

FIG 2

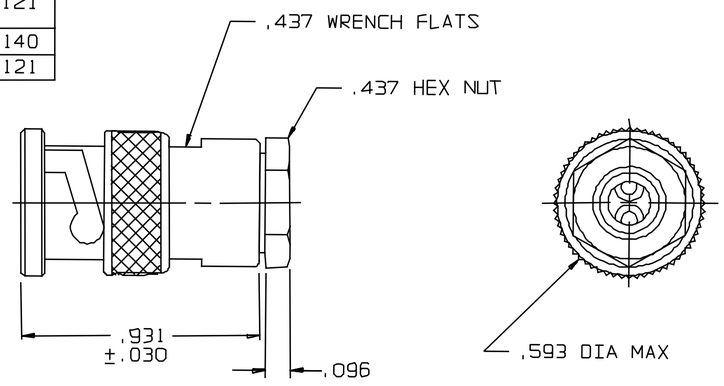


-8 SHOWN

-8,-10,-11,-12,-46 & -54

FIG 3 ④

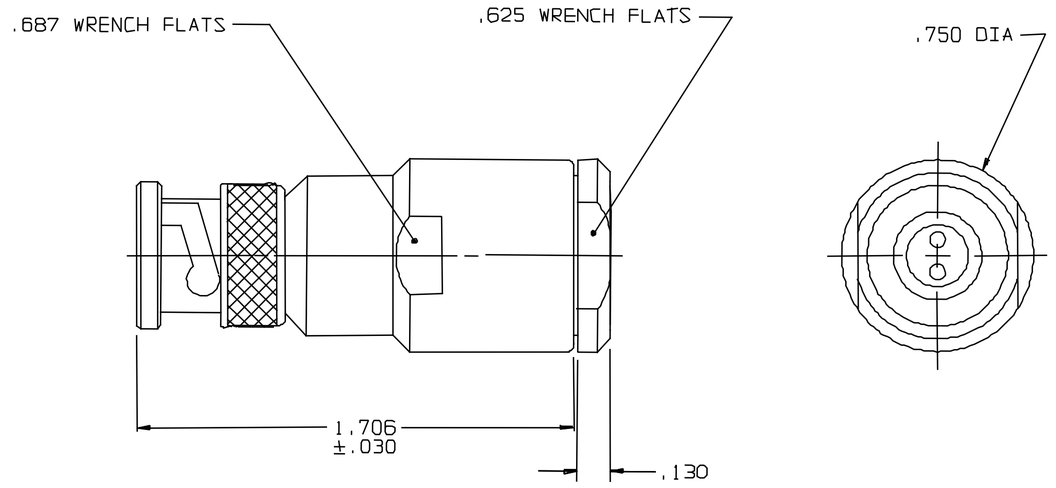


-9BR SHOWN

-9,-25,-27,-29,-47 & -49

| INCH | MM |
|---|---|
| .005 | 0.13 |
| .030 | 0.76 |
| .096 | 2.44 |
| .125 | 3.18 |
| .130 | 3.30 |
| .437 | 11.10 |
| .593 | 15.06 |
| .625 | 15.88 |
| .687 | 17.45 |
| .750 | 19.05 |
| .931 | 23.65 |
| 1.706 | 43.33 |
| 1.846 | 46.89 |

6. EXAMPLE OF COMPLETE PART NO:

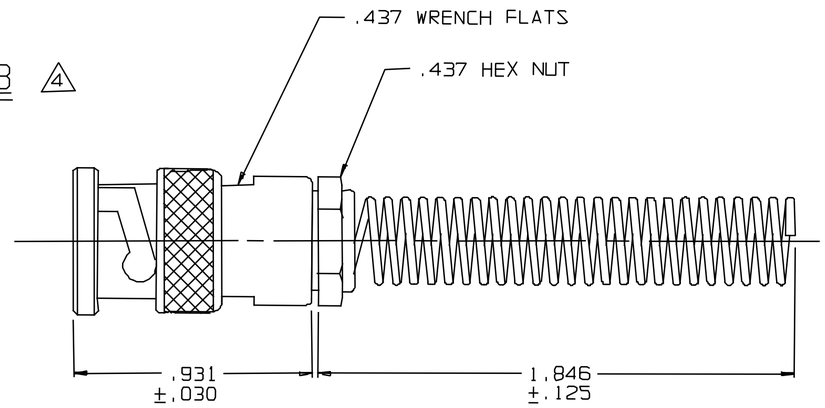2-0008 - 25 BR ④

BASIC PART NO — DASH NO

5. EXAMPLE OF COMPLETE MODEL NO:

PL30 - 25 BR ④

BASIC MODEL NO — DASH NO

④ IF BEND RELIEF SPRING REQD, (SEE FIG 3) ADD SUFFIX "BR" TO DASH NO (NOT AVAILABLE WITH CABLE GROUPS -8,-10,-11,-12,-46 & -54)

3. TWINAXIAL BNC TYPE, TWO PIN CABLE PLUG

2. FINISH: TFS-1A (NICKEL)

1. ALL DIM ARE IN INCHES

| | DESCRIPTION | | | PART NUMBER | ITEM |
|---|---|---|---|---|---|
| TOL UNLESS SPECIFIED .XX ± .XXX ±.005 .XXXX± ANGLES± | TROMPETER ELECTRONICS, INC. | | | PL30 | |
| DWN | DKC | 4-25-94 | MATERIAL | CODE IDENT | DRAWING NO. | REV |
| CHK | | | ——— | 14949 | 2-0008 | AB |
| ENGR | | | | | | |
| APPR | | | SCALE 2/1 | DATE 2/16/66 | SHEET 1 OF 2 | |

NEXT ASSY