

Technical Data


Magnetic switch

Series MA-26



Type designation **MAK-2612-L-2**

Item number **6416226286**

Wiring diagram



Switching diagram

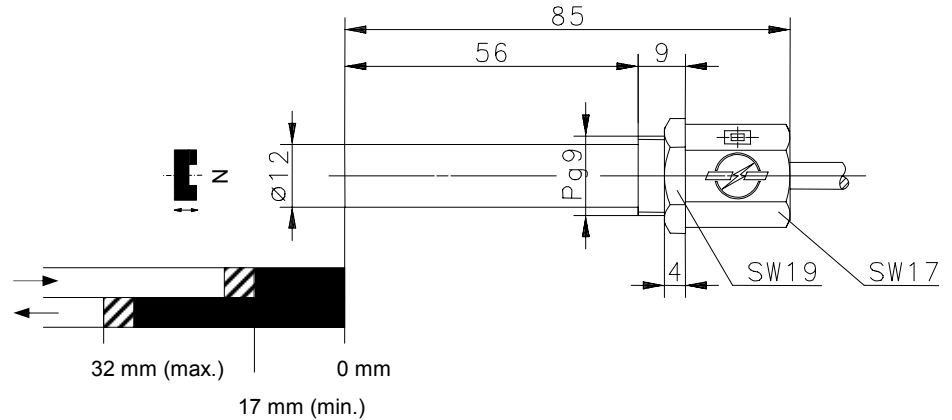

Electrical data

Max. switching voltage	250V
Max. switched current	1A
Max. switching capacity	60VA
Mechanical Lifetime	3 x 10 ⁸ switchings, however, according to load resetability
Repeat accuracy	R ± 0,1 mm, under same geometrical conditions at the same temperature
Output function	N.O.

Mechanical data

Enclosure	PA 6; encapsulated reed contact
Ambient air temperature	-5°C ... +70°C
Type of protection	IP 67 acc. to IEC 529, EN 60529
Termination type	Cabel 2 x 0,5 mm ² x 2 m ±5%; PVC - outer jacket, black
Assembly position	optional (assembly on iron means reduction of switch distance)
Fixing accessories	1 x hexagon nut

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual from the here described condition are excluded. Subject to modifications and amendments.

Date of issue: 05.01.2006 / Page 1 of 1
Document: 6416226286_en / Last update: 1 / 0617-04