

EDC2BV7282-(60/70)JG-S

16MByte (2M x 72) CMOS

EDO DRAM Module - 3.3V (ECC), Buffered

General Description

The EDC2BV7282-(60/70)JG-S is a high performance, EDO (Extended Data Out) 16-megabyte dynamic RAM module organized as 2M words by 72 bits, in a 168-pins, dual-in-line (DIMM) memory module with ECC.

The module utilizes nine, Fujitsu MB81V17805A-(60/70)PJ CMOS 2Mx8 EDO dynamic RAMs in a surface mount package on an epoxy laminate substrate. Each device is accompanied by a decoupling capacitor for improved noise immunity.

Control lines provided are such that Dword control is possible. All signals are buffered (74ABT16244 or equivalent) except RAS, data and IDs.

Features

- High Density: 16MByte
- Fast Access Time of 60/70 ns (max.)
- Low Power: 3.9/3.6 W (max.) -Active (60/70 ns)
180mW (max.) - Standby (LVTTTL)
148mW (max.) - Standby (CMOS)
- LVTTTL-compatible inputs and outputs
- Separate power and ground planes to improve noise immunity
- Single power supply of 3.3V±0.3V
- Height: 1.00 inch
- 2K Refresh Cycles

ABSOLUTE MAXIMUM RATINGS


Item	Symbol	Ratings	Unit
Voltage on any pin relative to V _{SS}	V _T	-0.5 to +4.6	V
Power Dissipation	P _T	11	W
Operating Temperature	T _{opr}	0 to +70	°C
Storage Temperature	T _{stg}	-55 to +125	°C
Short Circuit Output Current	I _{OS}	-50 to +50	mA

RECOMMENDED DC OPERATING CONDITIONS

(T_A = 0 to +70 °C)

Symbol	Parameter	Min	Typ	Max	Unit
V _{CC}	Supply Voltage	3.0	3.3	3.6	V
V _{SS}	Ground	0	0	0	V
V _{IH}	Input High voltage	2.0	-	V _{CC} +0.3	V
V _{IL}	Input Low voltage	-0.3	-	0.8	V

Functional Diagram

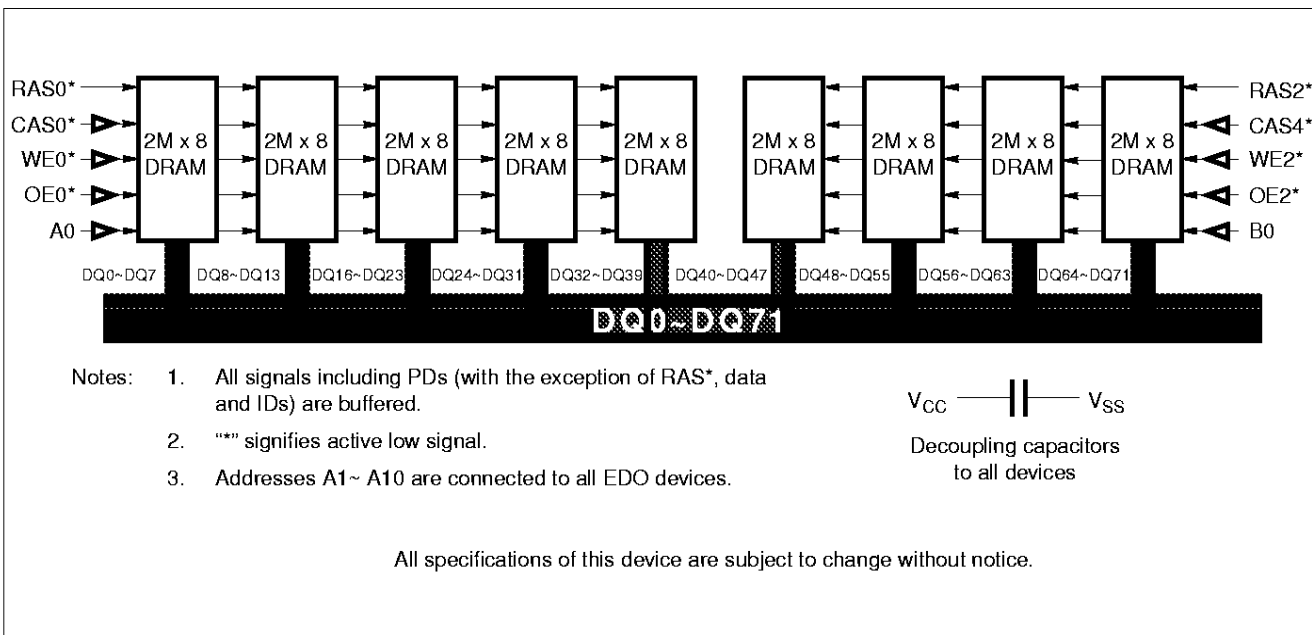

EDC2BV7282-(60/70)JG-S

Pin Name

A0~A10, B0 Rows and Column Addresses
DQ0~DQ71 Data Inputs/Outputs
WE0*, WE2* Write Enable
RAS0*, RAS2* Row Address Strobes
OE0*, OE2* Output Enable
CAS0*, CAS4* Column Address Strobes
V_{CC} Power Supply

V_{SS} Ground
NC No Connection
PDE* Presence Detect Enable
PD1~PD8 Presence Detect

PD	60ns	70ns
PD6	NC	GND
PD7	NC	NC

Pin No.	Pin Designation	Pin No.	Pin Designation	Pin No.	Pin Designation	Pin No.	Pin Designation
1	V _{SS}	43	V _{SS}	85	V _{SS}	127	V _{SS}
2	DQ0	44	OE2* †	86	DQ36	128	NC
3	DQ1	45	RAS2*	87	DQ37	129	NC
4	DQ2	46	CAS4* †	88	DQ38	130	NC
5	DQ3	47	NC	89	DQ39	131	NC
6	V _{CC}	48	WE2* †	90	V _{CC}	132	PDE*
7	DQ4	49	V _{CC}	91	DQ40	133	V _{CC}
8	DQ5	50	NC	92	DQ41	134	NC
9	DQ6	51	NC	93	DQ42	135	NC
10	DQ7	52	DQ18	94	DQ43	136	DQ54
11	DQ8	53	DQ19	95	DQ44	137	DQ55
12	V _{SS}	54	V _{SS}	96	V _{SS}	138	V _{SS}
13	DQ9	55	DQ20	97	DQ45	139	DQ56
14	DQ10	56	DQ21	98	DQ46	140	DQ57
15	DQ11	57	DQ22	99	DQ47	141	DQ58
16	DQ12	58	DQ23	100	DQ48	142	DQ59
17	DQ13	59	V _{CC}	101	DQ49	143	V _{CC}
18	V _{CC}	60	DQ24	102	V _{CC}	144	DQ60
19	DQ14	61	NC	103	DQ50	145	NC
20	DQ15	62	NC	104	DQ51	146	NC
21	DQ16	63	NC	105	DQ52	147	NC
22	DQ17	64	V _{SS}	106	DQ53	148	NC
23	V _{SS}	65	DQ25	107	V _{SS}	149	DQ61
24	NC	66	DQ26	108	NC	150	DQ62
25	NC	67	DQ27	109	NC	151	DQ63
26	V _{CC}	68	V _{SS}	110	V _{CC}	152	V _{SS}
27	WE0* †	69	DQ28	111	NC	153	DQ64
28	CAS0* †	70	DQ29	112	NC	154	DQ65
29	NC	71	DQ30	113	NC	155	DQ66
30	RAS0*	72	DQ31	114	NC	156	DQ67
31	OE0* †	73	V _{CC}	115	NC	157	V _{CC}
32	V _{SS}	74	DQ32	116	V _{SS}	158	DQ68
33	A0 †	75	DQ33	117	A1 †	159	DQ69
34	A2 †	76	DQ34	118	A3 †	160	DQ70
35	A4 †	77	DQ35	119	A5 †	161	DQ71
36	A6 †	78	V _{SS}	120	A7 †	162	V _{SS}
37	A8 †	79	PD1(NC)	121	A9 †	163	PD2(V _{SS})
38	A10 †	80	PD3(V _{SS}) †	122	NC	164	PD4(NC)
39	NC	81	PD5(NC) †	123	NC	165	PD6 †
40	V _{CC}	82	PD7 †	124	V _{CC}	166	PD8(V _{SS}) †
41	NC	83	ID0(V _{SS})	125	NC	167	ID1(V _{SS})
42	NC	84	V _{CC}	126	B0 †	168	V _{CC}

Notes: 1. PDE* (Pin 132): PD Enable.
2. Signals marked with "†" are buffered.

EDC2BV7282-(60/70)JG-S

DC CHARACTERISTICS

($V_{CC} = 3.3V \pm 0.3V$, $V_{SS} = 0V$, $T_A = 0$ to $+70^\circ C$)

Parameter	Symbol	Test Condition	60		70		Unit	Note
			Min.	Max.	Min.	Max.		
Operating Current	I_{CC1}	RAS*, CAS* cycling; $t_{RC} = \min.$	-	1090	-	1000	mA	1, 2
Standby current	I_{CC2}	LVTTL Interface RAS*, CAS* $\geq V_{IH}$ $D_{out} = \text{High-Z}$	-	50	-	50	mA	
		CMOS Interface RAS*, CAS* $\geq V_{CC} - 0.2V$ $D_{out} = \text{High-Z}$	-	41	-	41	mA	
RAS* -only Refresh Current	I_{CC3}	CAS* $\geq V_{IH}$; RAS*, Address cycling @ $t_{RC} = \min$	-	1090	-	1000	mA	2
CAS*-before-RAS* Refresh Current	I_{CC4}	RAS*, CAS* cycling @ $t_{RC} = \min.$	-	1090	-	1000	mA	
Hyper Page Mode Current	I_{CC5}	RAS* $\leq V_{IL}$ CAS*, Address cycling @ $t_{PC} = \min$	-	1090	-	1000	mA	1, 3
Input Leakage Current	I_{LI}	$0V \leq V_{in} \leq V_{CC} + 0.3V$	-90	90	-90	90	μA	
Output Leakage Current	I_{LO}	$0V \leq V_{out} \leq V_{CC}$ $D_{out} = \text{Disable}$	-10	10	-10	10	μA	
Output High Voltage	V_{OH}	High $I_{out} = -2mA$	2.4	-	2.4	-	V	
Output Low Voltage	V_{OL}	Low $I_{out} = 2 mA$	-	0.4	-	0.4	V	

- Notes:
1. Values depend on output load condition when the device is selected. Maximum Values are specified at the output open condition.
 2. Address can be changed once or less while RAS* = V_{IL} .
 3. Address can be changed once or less while CAS* = V_{IH} .

CAPACITANCE

($T_A = +25^\circ C$, $V_{CC} = 3.3V \pm 0.3V$)

Parameter	Symbol	Max.	Unit	Note
Input Capacitance (Address)	C_{I1}	10	pF	1
Input Capacitance (RAS0*)	C_{I2}	40	pF	1
Input Capacitance (RAS2*)	C_{I3}	33	pF	1
Input Capacitance (CAS*, WE*, OE*)	C_{I4}	12	pF	1
Input/Output Capacitance (DQ0~DQ71)	$C_{I/O}$	20	pF	1, 2

- Notes:
1. Capacitance is measured with Boonton Meter or effective capacitance method.
 2. CAS* = V_{IH} to disable D_{out} .

EDC2BV7282-(60/70)JG-S

AC CHARACTERISTICS

(TA = 0 to +70°C, V_{CC} = 3.3V±0.3V, V_{SS} = 0V)


Parameter	Symbol	60		70		Unit	Notes
		Min	Max	Min	Max		
Random read/write cycle time	t _{RC}	110	-	130	-	ns	
Access time from RAS*	t _{RAC}	-	60	-	70	ns	3,4
Access time from CAS*	t _{CAC}	-	20	-	25	ns	3,4,5
Access time from column address	t _{AA}	-	35	-	40	ns	3, 10
Transition time (rise and fall)	t _T	3	50	3	50	ns	2
RAS* precharge time	t _{RP}	40	-	50	-	ns	
RAS* pulse width	t _{RAS}	60	10000	70	10000	ns	
RAS* hold time	t _{RSH}	20	-	25	-	ns	
CAS* hold time	t _{CSH}	60	-	70	-	ns	
CAS* pulse width	t _{CAS}	15	10000	20	10000	ns	
RAS* to CAS* delay time	t _{RCD}	20	40	20	45	ns	4
RAS* to column address delay time	t _{RAD}	15	25	15	30	ns	10
CAS* to RAS* precharge time	t _{CRP}	10	-	10	-	ns	
Row address set-up time	t _{ASR}	5	-	5	-	ns	
Row address hold time	t _{RAH}	10	-	10	-	ns	
Column address set-up time	t _{ASC}	0	-	0	-	ns	
Column address hold time	t _{CAH}	10	-	15	-	ns	
Column address to RAS* lead time	t _{RAL}	35	-	40	-	ns	
Read command set-up time	t _{RCS}	5	-	5	-	ns	
Read command hold time to CAS*	t _{RCH}	0	-	0	-	ns	8
Read command hold time to RAS*	t _{RRH}	0	-	0	-	ns	
Write command hold time	t _{WCH}	10	-	15	-	ns	
Write command pulse width	t _{WP}	10	-	15	-	ns	
Write command to RAS* lead time	t _{RWL}	20	-	25	-	ns	
Write command to CAS* lead time	t _{CWL}	15	-	20	-	ns	
Data-in set-up time	t _{DS}	0	-	0	-	ns	9
Data-in hold time	t _{DH}	15	-	20	-	ns	9
Refresh period	t _{REF}	-	32	-	32	ms	
Write command set-up time	t _{WCS}	0	-	0	-	ns	7
CAS* set-up time (CBR refresh)	t _{CSR}	15	-	15	-	ns	1
CAS* hold time (CBR refresh)	t _{CHR}	10	-	15	-	ns	1
RAS* precharge to CAS* hold time	t _{RPC}	5	-	5	-	ns	
Access time from CAS* precharge	t _{CPA}	-	40	-	45	ns	3, 11
Hyper page mode cycle time	t _{HPC}	40	-	45	-	ns	
CAS* precharge time (Hyper page)	t _{CP}	10	-	10	-	ns	
RAS* pulse width (Hyper page)	t _{RASP}	60	100000	70	100000	ns	12

EDC2BV7282-(60/70)JG-S

- Notes:
1. An initial pulse of at least 200 μ s is required after power-up followed by a minimum of eight RAS* cycles before device operation is achieved.
 2. V_{IH} (min.) and V_{IL} (max.) are reference levels for measuring timing of input signals. Transition times are measured between V_{IH} (min.) and V_{IL} (max.) and are assumed to be 5 ns for all inputs.
 3. Measure with a load equivalent of 2 TTL loads and 100pF.
 4. Operation within the t_{RCD} (max.) limit ensures that t_{RAC} (max.) limit can be met; t_{RCD} (max.) is specified as a reference point only. If t_{RCD} is greater than the specified t_{RCD} (max) limit, then access time is controlled exclusively by t_{CAC} .
 5. Assumes that $t_{RCD} \geq t_{RACD}$ (max.).
 6. This parameter defines the time at which the output achieves open circuit condition and is not referenced to V_{OH} or V_{OL} .
 7. t_{WCS} is a non restrictive operating parameter. It is included in the data sheet as an electrical characteristic only. If t_{WCS} t_{WCS} (min.) the cycle is an early write cycle and the data out pin will remain at high impedance for the duration of the cycle.
 8. Either t_{RCH} or t_{RRH} must be satisfied for a read cycle.
 9. These parameters are referenced to the CAS* leading edge in early write cycles.
 10. Operation within the t_{RAD} (max.) limit ensures that t_{RAC} (max.) limit can be met. t_{RAD} (max.) is specified as a reference point only. If t_{RAD} is greater than the specified t_{RAD} (max.) limit, then access time is controlled by t_{AA} .
 11. Access time is determined by the longer of t_{AA} , t_{CAC} , or t_{ACP} .
 12. t_{RASC} defines RAS* pulse width in fast page mode cycles.

Physical Dimensions

168-pin DIMM

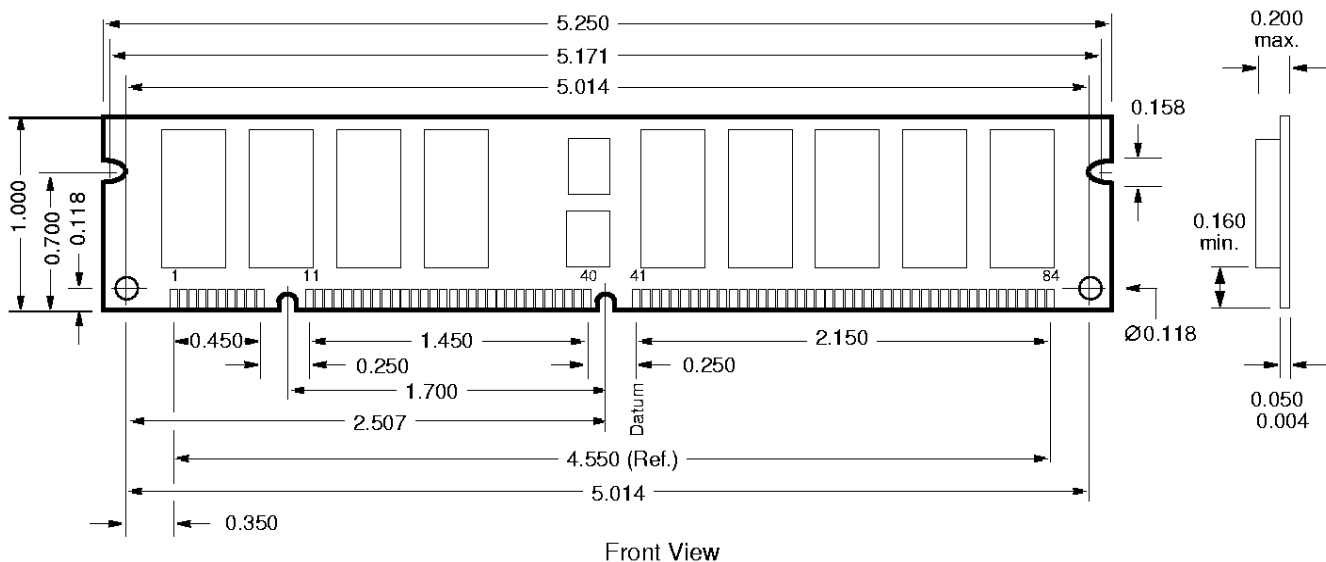

- Notes:
1. All dimensions are in inches.
 2. Pin 85 is behind pin 1 on the back side.

EDC2BV7282-(60/70)JG-S

All Rights Reserved.

Circuit diagrams using Fujitsu products are included to illustrate typical semiconductor applications. Information sufficient for construction purpose may not be shown.

The information contained in this document has been carefully checked and is believed to be reliable. However, Fujitsu Microelectronics, Inc. assumes no responsibility for inaccuracies.

The information conveyed in this document does not convey any license under the copyrights, patent rights or trademarks claimed and owned by Fujitsu Limited, its subsidiaries, or Fujitsu Microelectronics, Inc.

Fujitsu Microelectronics, Inc. reserves the right to change products or specifications without notice.

No part of the publication may be copied or reproduced in any form or by any means, or transferred to any third party without prior written consent of Fujitsu Microelectronics, Inc.

Worldwide Headquarters

Japan

Fujitsu Limited

Tel: +81 44 754 3753
Fax: +81 44 754 3332
1015 Kamiodanaka
Nakaharaku
Kawasaki 211
Japan

<http://www.fujitsu.co.jp/>

Asia

Fujitsu Microelectronics Asia PTE Limited

Tel: +65 336 1600
Fa +65 336 1609
x:
No. 51 Bras Basah Road
Plaza by the Park
#06-04/07
Singapore 0718

<http://www.fsl.com.sg/>

USA

Fujitsu Microelectronics Inc
3545 North First Street
San José CA 95134-1804
USA

Tel: +1 408 922 9000
Fax: +1 408 922 9179

Tel: +1 800 866 8608
Fax: +1 408 922 9179
Customer Response Center
Mon-Fri: 7am-5pm (PST)

<http://www.fujitsumicro.com/>

Europe

Fujitsu Mikroelektronik GmbH

Tel: +49 6103 6900
Fa +49 6103 6901
x:
Am Siebenstein 6-10
D-63303 Dreieich-
Buchsschlag
Germany

<http://www.fujitsu.ede.com/>

All Right Reserved.

The information contained in this document has been carefully checked and is believed to be reliable. However, Fujitsu Microelectronics, Inc. assumes no responsibility for inaccuracies.

The information conveyed in this document does not convey any license under the copyrights, patent rights or trademarks claimed and owned by Fujitsu Limited, its subsidiaries, or Fujitsu Microelectronics, Inc.

Fujitsu Microelectronics, Inc. reserves the right to change products or specifications without notice.

No part of the publication may be copied or reproduced in any form or by any means, or transferred to any third party without prior written consent of Fujitsu Microelectronics, Inc.