


1 2 3 4 5 6 7 8

REVISIONS			
ISS	ZONE	DESCRIPTION	PER REQUEST\DATE

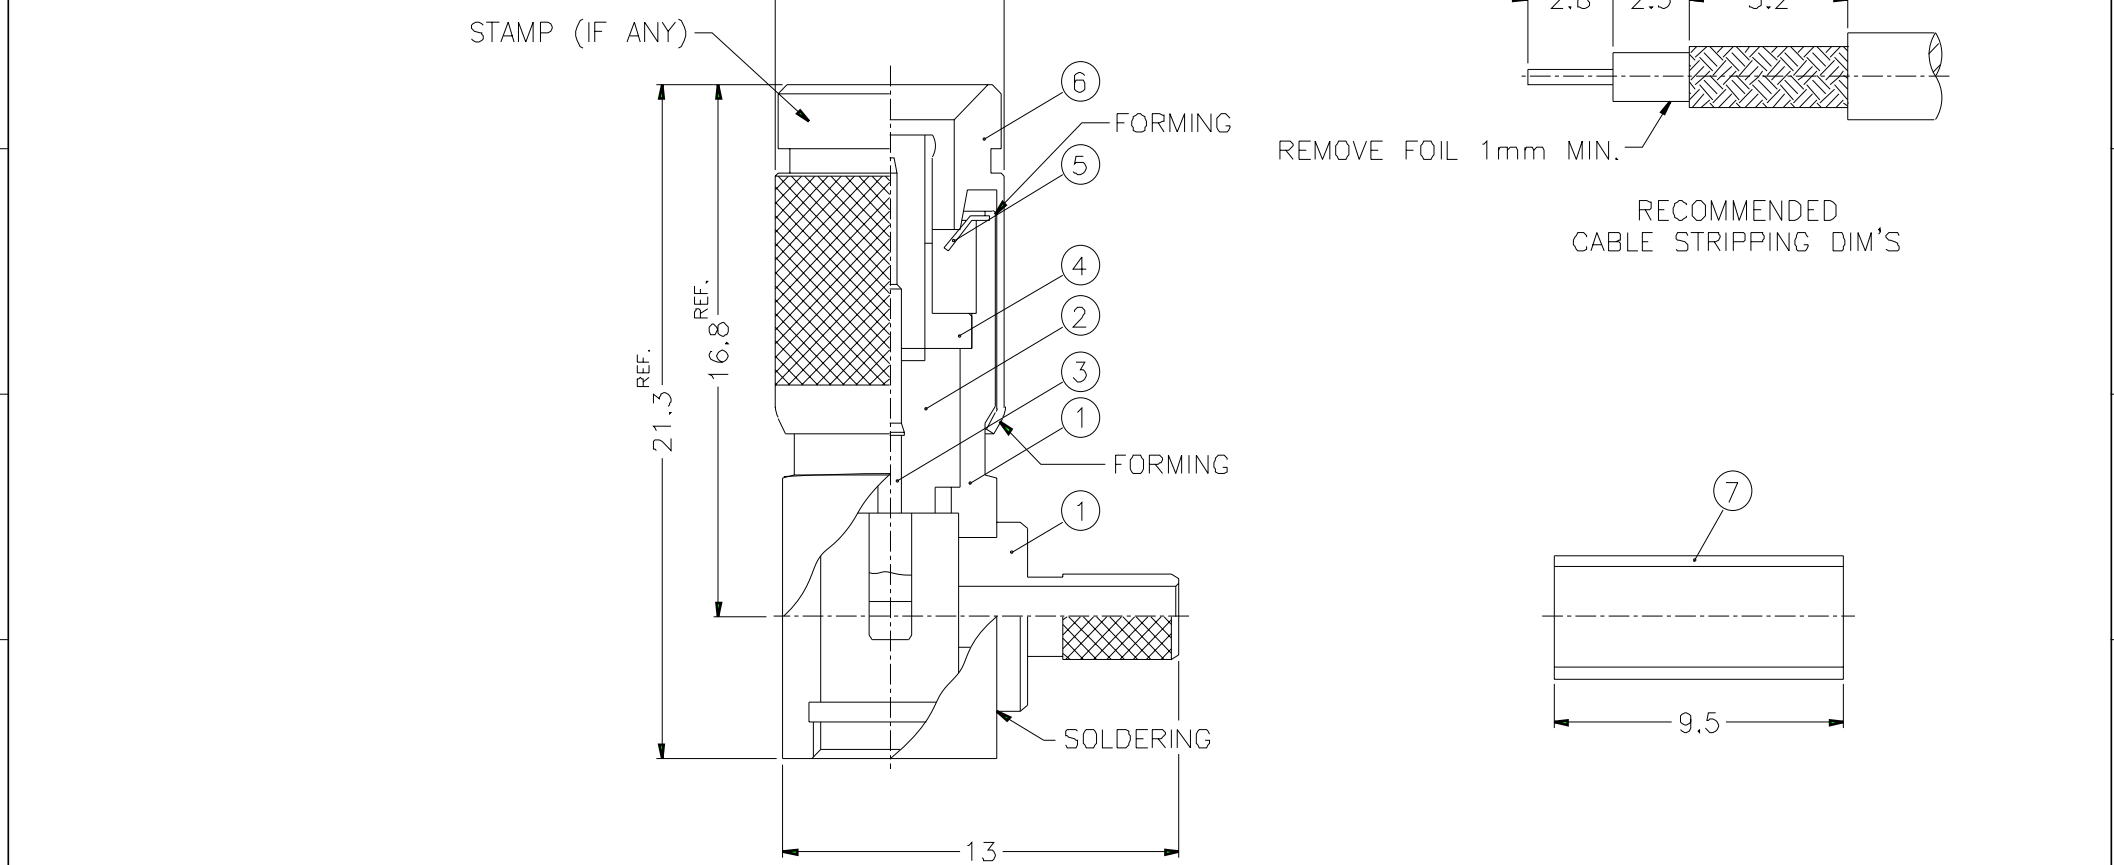

- 1. CRIMPED FERRULE  
HEX CRIMP SIZE .128"
- 2. CONTACT PIN TO SOLDER

CABLES: -RG-179/U, 179A/U, 179B/U, 187A/U  
 -L45466-D12-C66  
 -GORE AND 3M CABLE  
 -RA-8000

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
8	COVER	BRASS	NICKEL	1	DMT-2004-004N-8
7	FERRULE	COPPER	NICKEL	1	FR-39/32X95
6	SHELL	BRASS	NICKEL	1	SH10AAC01A
5	SPRING	BEUC	NATURAL	1	123-PLUG-SPR
4	OUT CONTACT	BEUC	GOLD	1	1231121D1-6-B
3	CONTACT PIN	BRASS	GOLD	1	1231112D2-3-75
2	INSULATOR	PTFE	NATURAL	1	NS0DAHT02A
1	HOUSING WITH BARREL	BRASS	NICKEL	1	MB00ABC03A

UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4	PART NO.	1231112D1-E06	<h1 style="text-align: center;">Amphenol RF</h1>		
	APPROVED	DATE		TITLE	
	CHECKED	DATE		DRAWING NO.	
	DRAWN	DATE		ITEM NO.	
SCALE	4/1	ISSUE	A1	FILE NO.	F:\ND\10\1112\ERB\19\7F\MN

1 2 3 4 5 6 7 8

A B C D E F