# YL-82 2 Way In-Phase Power Divider / Combiner

# A passion for performance.



# **Specifications:**

Designed to meet:

Parameter	Specification	Units
Frequency Range (Min)	1.7 – 2.4	GHz
In / Out VSWR (Max)	1.25 / 1.20	dB
Insertion Loss (Max)	0.20	dB
Isolation (Min)	23.0	dB
Phase Balence	2.0	Degrees
Amp Balence	0.10	dB

# **Environmental Specifications:**

#### Notes:

Please Contact the Factory for Custom Specifications

### **Mechanical Specifications:**

Case Style:	YL Outline
Connectors:	SMA Female per MIL-C-39012


MIL-E-5400, MIL-STD-202, MIL-E-16400 Operating Temp: -55°C to +125°C Storage Temp: -65°C to +150°C Humidity: MIL-STD-202F, M103, Cond B Shock: MIL-STD-202F, M213, Cond B Altitude: MIL-STD-202F, M105, Cond B Vibration: MIL-STD-202F, M105, Cond B Thermal Shock: MIL-STD-202F, M107, Cond A Temperature Cycle: MIL-STD-202F, M105C, Cond D



40 Industrial Way East, Eatontown , NJ 07724 [USA] Phone: (732) 460-0212, Fax: (732) 460-0214 www.aeroflex.com/ascs • ascs-sales@aeroflex.com



## **Outline Drawing:**

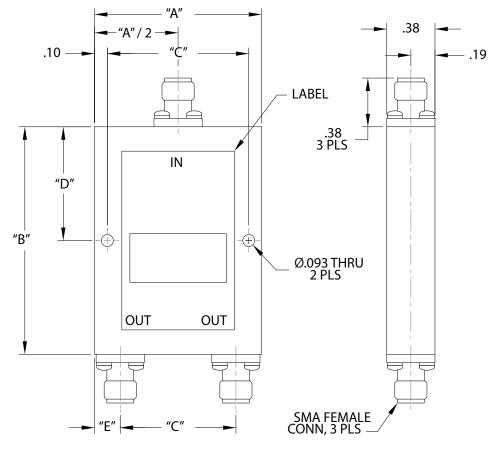

#### OUTLINE CASE STYLE YL

"A"	"B"	"C"	"D"	"E"
in	in	in	in	in
0.85	0.82	0.65	0.38	0.20

