




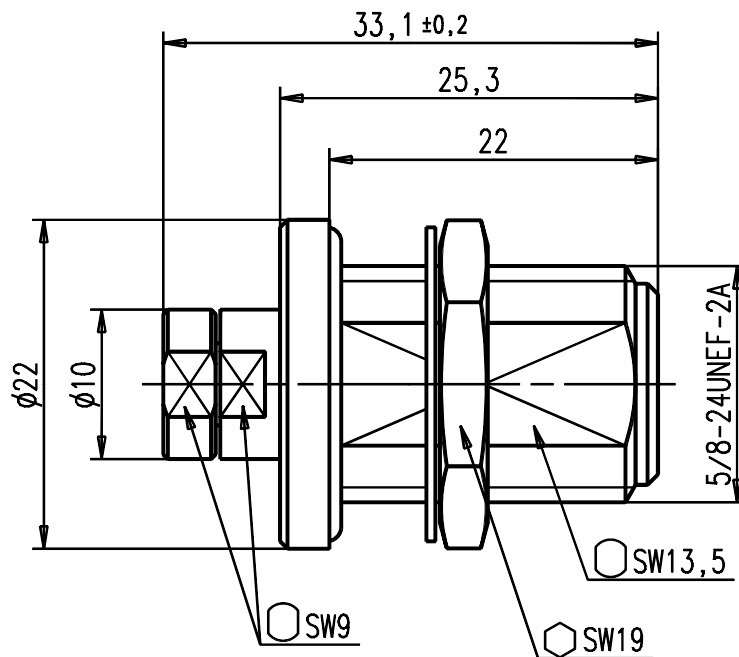


Montagedurchbruch
Panel cut out



Kabelzuschnitt
Stripping dimension
Semi-Rigid

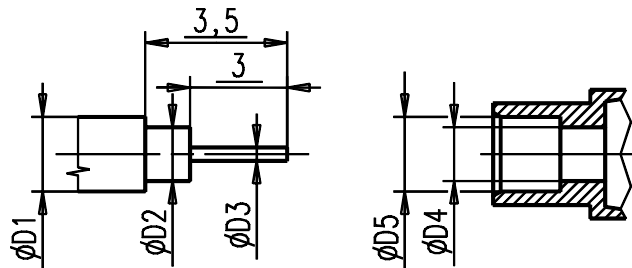

M 1:1
S 1:1



Kabel cable					Anschluss connecting area	
* Kabelgruppe * Cable group	Typ Type	ØD1	ØD2	ØD3	ØD4	ØD5
6	RG405/U; UT85	2,20	1,68	0,51	1,85	2,25
7	RG402/U; UT141	3,58	3,00	0,91	3,04	3,65

* An Position 12 in Zeich.-Nr. eintragen
* At position 12 of drawing number

IMS CONNECTOR SYSTEMS					general tolerance ISO 2768 mH		scale: 2:1 (1:1)	
					Assembly instruction: Stripping dimension:			
					generate	date 10.03.98	Kabeleinbaubuchse Mount. cable jack	
					checked			
					Norm		2029.62.2814.2''	
					30086			
							Rev. a	
330/01	a	KG korrigiert	17.05.01	Hogg				
nr.	rev.	alteration	date	name				