REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE



RECOMMENDED
CABLE STRIPPING DIM'S

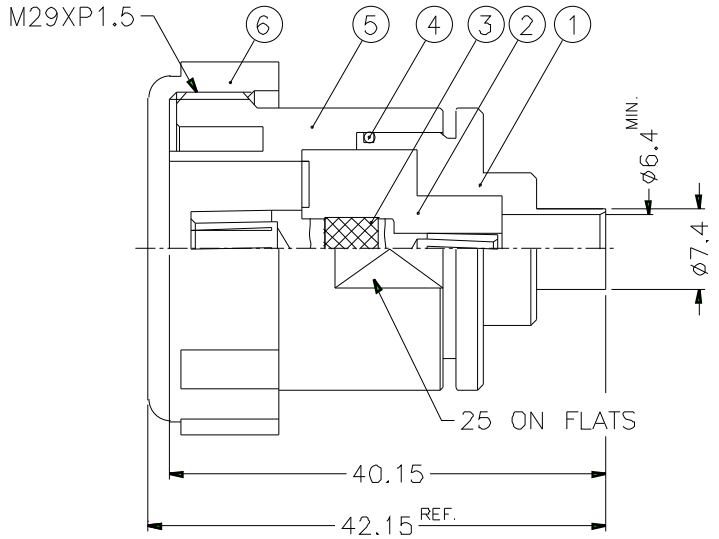

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. SILVER PL. 120 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468
6. BLUE, PER PANTONE 3005C

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	COVER	PE	NOTE 6	1	7166141A1-9
5	BODY	NOTE 1	NOTE 2	1	7166111A2-5
4	GASKET	SILICONE	RED	1	GS-215/183XD16
3	CONTACT PIN	NOTE 3	NOTE 4	1	7166581A1-3-.250
2	INSULATOR	NOTE 5	NATURAL	1	7161181A1-2T-.250
1	BARREL	NOTE 1	NOTE 2	1	7161181A1-1-74/64

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 1.5/1 ISSUE A

FILE NO

PART NO. 7166181A1-120STS-12-50

APPROVED	DATE	10-11-01'
CHECKED	DATE	10-11-01'
DRAWN	DATE	10-11-01'

Amphenol

TITLE 7/16 SEMI-RIGID JACK (FOR .250")

DRAWING NO. KJ-7166181A1-120STS-.250-50

ITEM NO.