


Outline Drawing (Size: mm)

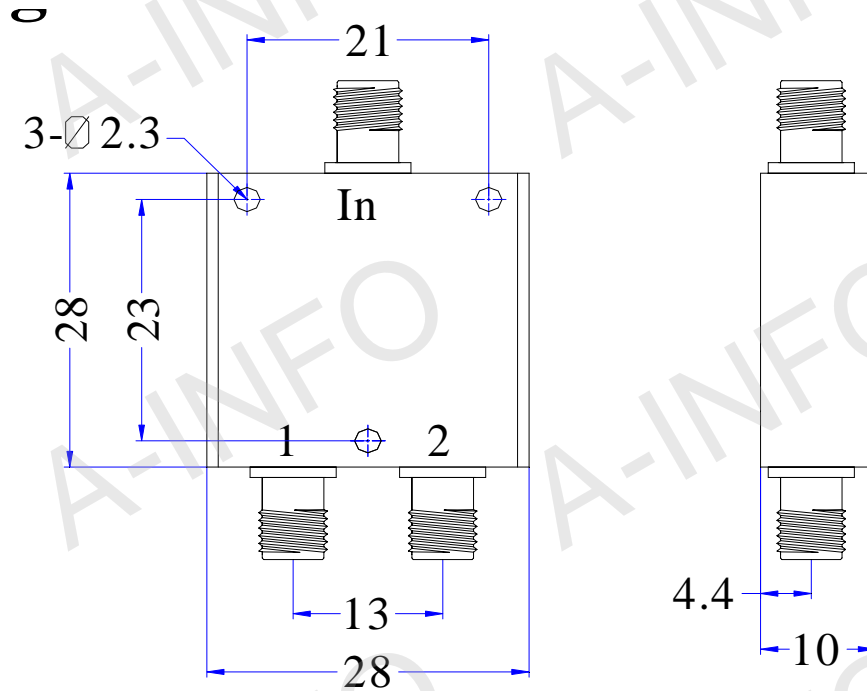

Test Results Table

Item	Technical Specification	Test results
Frequency Range(GHz)	1.7-2.5	1.7-2.5
Insertion Loss(dB)	0.4Max	0.28 Max
Isolation(dB)	20 Min	24.3 Min
Input VSWR	1.25 : 1 Max	1.21 Max
Output VSWR	1.25 : 1 Max	1.21 Max
Phase Balance(°)	±2 Max	±1.5 Max
Amplitude Balance(dB)	±0.3 Max	±0.2 Max
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-30 ~ +60	-30 ~ +60