


Sinewave Crystal Oscillators


CO-233, CO-233H



Features


- Frequencies from 4 MHz to 300 MHz
- PCB Mount Design
- Low Phase Noise Option Available
- +13 dBm output available

CO-233H

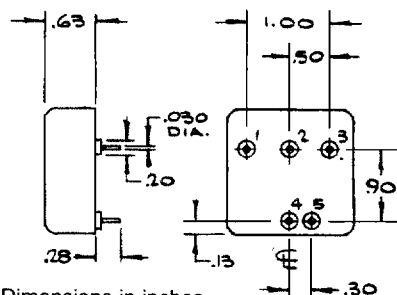

Note: Dimensions in inches


CO-233F, CO-233FW



Features


- Frequencies from 4 MHz to 500 MHz
- PCB Mount Design (CO-233F)
- SMA connector option (CO-233FW)
- Low Phase Noise Option Available

CO-233F

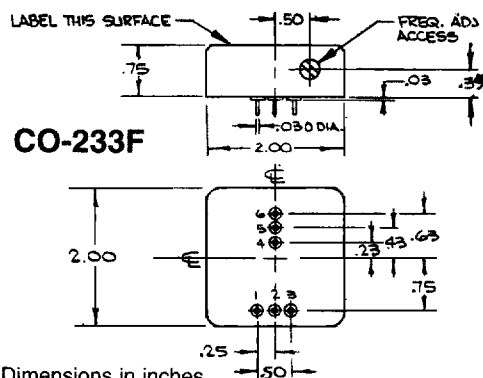


Note: Dimensions in inches

CO-285W/CO-285P



Features

- Frequencies from 4 MHz to 500 MHz
- PCB Mount Design
- Reduced Size
- Low Phase Noise Option Available
- Pin only version available (CO-285P)

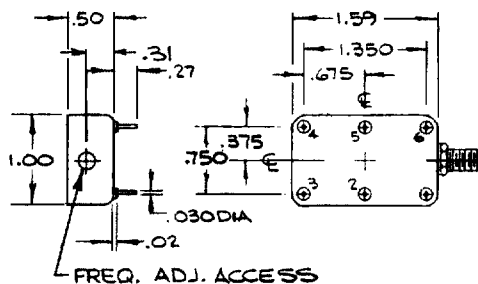
CO-285W

CO-285P

Delete SMA; output pin is on center line between pins 1 and 6. RF return is on Pin 6.

Note: Dimensions in inches


CO-484/487




Features

- Frequencies from 4 MHz to 500 MHz
- Miniature Hybrid Design
- 16 pin double DIP or 16 Pin Flatpack
- +13 dBm output available

CO-484



CO-487



E option, connect 5-30 pf capacitor from pin 5 to pin 8.

Note: Dimensions in inches

