


order number: J00030A0598

2-way, protective sleeve black

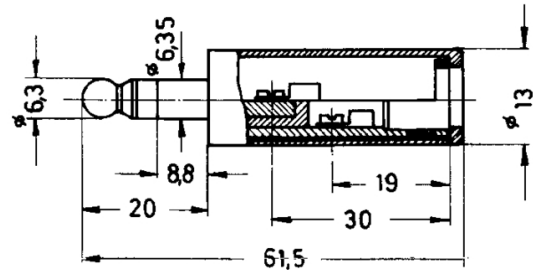

Technical Attributes	
MIL-Std.	PJ-054 B
Nato-No.	5935-192-4764
Remarks	2-way, protective sleeve black

Product description

The 2- and 3-way connectors according to MIL-P-642, MIL-J-641 are used in the military and civilian field of communication equipments e. g. for connecting headphones, handsets, microphones and headgear speechsets. The type of termination is screw termination for the plugs and soldering for the jacks. The strain relief is made by a clamping ring.

Mechanical Characteristics	
Insertion force	max. 25 N
Disengagement	min. 10 N
Contact force	≥ 0.8 N
Durability (mating cycles)	≥ 5000
Material: contact spring	CuZn37F55
Material: contacts	CuZn40Pb2
Material: contact finish	Ni
Material: insulators	PA

Climatic Characteristics	
	55/070/10

Tested / classified in accordance with DIN IEC 60068-1
--

Electrical Characteristics	
----------------------------	--

Contact resistance	
--------------------	--

Insulation resistance	$\geq 100 \text{ M}\Omega$
-----------------------	----------------------------

Voltage proof	500 V _{eff} /50 Hz
---------------	-----------------------------

Working voltage a.c.	max. 60 V
----------------------	-----------

Working current	max. 1 A
-----------------	----------