


N=Number of Contacts

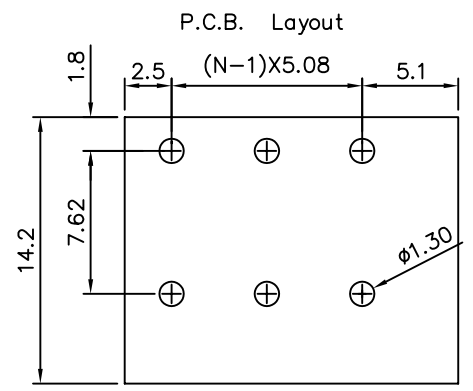

SPECIFICATIONS

- Contact: Brass
- Wire Guard: Stainless Steel
- Surface Of Solder Tail: Tin Plated
- Insulator Body(Housing): PBT(Glass Filled)(UL94V-0)
- Insulator Level: Polyamide(Glass Filled)(UL94V-0)
- Voltage Rating: 300VAC
- Current Rating: 10Amps/Way Max.
- Contact Resistance: 20 Milliohms Max.
- Insulation Resistance: 1000 Megohms Min.
- Wire Range: 14-24AWG
- Operating Temperature: -55°C To +105°C
- Test Temperature: 250°C, 5 Seconds Max.

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
		MEI			.X ±0.30				
PART No.		CHECKED BY		.XX ±0.10					
TBX51XXR		BECKY		ANG.					
DRAWING No.		DRAWING BY							
TBX51XXR		TCF							
SCALE	NONE	REV.	A0	UNIT	mm	A0	NEW RELEASE	BECKY	2004/10/01
							NO. REV.	REVISIONS	CHK