

REV	DESCRIPTION	DATE	PREP	APPD
A	NIR-75933	10/3/19	LT	DF/SM

Preliminary



MOUNT HOLLY SPRINGS, PA 17065

Oscillator Specification, Hybrid Clock

For

Hi-Rel Standard, Sinewave Output

THE RECORD OF APPROVAL FOR THIS DOCUMENT IS MAINTAINED ELECTRONICALLY WITHIN THE ERP SYSTEM

CODE IDENT NO

00136

SIZE

A

DWG. NO.

DOC207975

REV

A

UNSPECIFIED TOLERANCES: N/A

SHEET 1 OF 21

1. SCOPE

- 1.1 General. This specification defines the design, assembly and functional evaluation of high reliability, hybrid clock oscillators produced by Vectron. Devices delivered to this specification represent the standardized Parts, Materials and Processes (PMP) Program developed, implemented and certified for advanced applications and extended environments.
- 1.2 Applications Overview. The designs represented by these products were primarily developed for the MIL-Aerospace community. The lesser Design Pedigrees and Screening Options imbedded within DOC207975 bridge the gap between Space and COTS hardware by providing custom hardware with measures of mechanical, assembly and reliability assurance needed for Military or Ruggedized COTS environments.

2. APPLICABLE DOCUMENTS

- 2.1 Specifications and Standards. The following specifications and standards form a part of this document to the extent specified herein. The issue currently in effect on the date of quotation will be the product baseline, unless otherwise specified. In the event of conflict between the texts of any references cited herein, the text of this document shall take precedence.

Military

MIL-PRF-55310 Oscillators, Crystal Controlled, General Specification For
MIL-PRF-38534 Hybrid Microcircuits, General Specification For

Standards

MIL-STD-202 Test Method Standard, Electronic and Electrical Component Parts
MIL-STD-883 Test Methods and Procedures for Microelectronics
QSP-91502 Procedure for Electrostatic Discharge Precautions

Other

DOC207984 Test Specification, Hybrid Clock, Hi-Rel Standard, Sine Output
QSP-90100 Quality Systems Manual, Vectron
DOC011627 Identification Common Documents, Materials and Processes, Hi-Rel XO
DOC203982 DPA Specification


3. GENERAL REQUIREMENTS

- 3.1 Classification. All devices delivered to this specification are of hybrid technology conforming to Type 1, Class 2 of MIL-PRF-55310. Primarily developed as a Class S equivalent specification, options are imbedded within it to also produce Class B, Engineering Model and Ruggedized COTS devices. Devices carry a Class 2 ESDS classification per MIL-PRF-38534.
- 3.2 Item Identification. Unique model number series are utilized to identify device package configurations as listed in Table 1.

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 2
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

MICROCHIP CONFIDENTIAL

- 3.3 Absolute Maximum Ratings.
- a. Supply Voltage Range (V_{CC}): 0Vdc to $V_{CC} + 2.0V_{dc}$
 - b. Storage Temperature Range (T_{STG}): $-65^{\circ}C$ to $+125^{\circ}C$
 - c. Junction Temperature (T_J): $+200^{\circ}C$
 - d. Lead Temperature (soldering, 10 seconds): $+300^{\circ}C$
- 3.4 Design, Parts, Materials and Processes, Assembly, Inspection and Test.
- 3.4.1 Design. The ruggedized designs implemented for these devices are proven in military and space applications under extreme environments. Designs utilize 4-point crystal mounting in combination with Established Reliability (MIL-ER) components where possible. When specified, radiation hardening up to 100krad (Si) (RHA level R) is met by utilizing swept quartz and active device types that have passed testing to that level.
- 3.4.1.1 Design and Configuration Stability. Barring changes to improve performance by reselecting passive chip component values to offset component tolerances, there will not be fundamental changes to the design or assembly or parts, materials and processes after first product delivery of that item without written approval from the procuring activity.
- 3.4.1.2 Environmental Integrity. Designs have passed the environmental qualification levels of MIL-PRF-55310. These designs have also passed extended dynamic levels of at least:
- a. Sine Vibration: MIL-STD-202, Method 204, Condition G (30g pk.)
 - b. Random Vibration: MIL-STD-202, Method 214, Condition II-J (43.92g rms, three minute duration in each of three mutually perpendicular directions)
 - c. Mechanical Shock: MIL-STD-202, Method 213, Condition F (1500g, 0.5ms)
- 3.4.2 Prohibited Parts, Materials and Processes. The items listed are prohibited for use in high reliability devices produced to this specification.
- a. Gold metallization of package elements without a barrier metal.
 - b. Zinc chromate as a finish.
 - c. Cadmium, zinc, or pure tin external or internal to the device.
 - d. Plastic encapsulated semiconductor devices.
 - e. Ultrasonically cleaned electronic parts.
 - f. Heterojunction Bipolar Transistor (HBT) technology.
 - g. 'getter' materials
- 3.4.3 Assembly. Manufacturing utilizes standardized procedures, processes and verification methods to produce MIL-PRF-55310 Class S / MIL-PRF-38534 Class K equivalent devices. MIL-PRF-38534 Group B Option 1 in-line inspection is included on radiation hardened part numbers to further verify lot pedigree. Traceability of all components and production lots are in accordance with MIL-PRF-38534, as a minimum. Tabulated records are provided as a part of the deliverable data package. Devices are handled in accordance with Vectron document QSP-91502 (Procedure for Electrostatic Discharge Precautions).

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 3
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------


MICROCHIP CONFIDENTIAL

- 3.4.4 Inspection. The inspection requirements of MIL-PRF-55310 apply to all devices delivered to this document. Inspection conditions and standards are documented in accordance with the Quality Assurance, ISO-9001 and AS9100 derived, System of QSP-90100.
- 3.4.5 Test. The Screening test matrix of Table 5 is tailored for selectable-combination testing to eliminate costs associated with the development/maintenance of device-specific documentation packages while maintaining performance integrity.
- 3.4.6 Marking. Device marking shall be in accordance with the requirements of MIL-PRF-55310.
- 3.4.7 Ruggedized COTS Design Implementation. Design Pedigree “D” devices (see ¶ 5.2) use the same robust designs found in the other device pedigrees. They do not include the provisions of traceability or the Class-qualified components noted in paragraphs 3.4.3 and 4.1.

4. DETAIL REQUIREMENTS

4.1 Components


- 4.1.1 Crystals. Cultured quartz crystal resonators are used to provide the selected frequency for the devices. The optional use of Premium Q swept quartz can, because of its processing to remove impurities, be specified to minimize frequency drift when operating in radiation environments. In accordance with MIL-PRF-55310, the manufacturer has a documented crystal element evaluation program.
- 4.1.2 Passive Components. Passive components will have the same pedigree as the die specified in paragraph 7.1. When required, Established Reliability (ER) failure level R minimum passive components are procured from QPL suppliers. Lot evaluations are in accordance with MIL-PRF-38534 or Enhanced Element Evaluation as specified in Table 8. When used, inductors may be open construction and may use up to 47-gauge wire.
- 4.1.3 Class S Active Devices. Active Devices are procured from wafer lots that have passed MIL-PRF-38534 Lot Acceptance Tests for Class K devices. When optionally specified, further testing in accordance with MIL-PRF-55310 and MIL-PRF-38534 is performed for Enhanced Element Evaluation as specified in Tables 6 and 7. All active devices are acceptable for use in environments of up to 300 krad (Si) total dose by Radiation Lot Acceptance Testing of the individual components. In addition, bipolar semiconductors are considered insensitive to Single Event Effects.
 - 4.1.3.1 Class B Active Devices. When specified, active devices assembled into DOC207975 Design Pedigree letters “B” and “C” devices (¶ 5.2a) are procured from wafer lots that have passed MIL-PRF-55310 element evaluations for Class B devices.
- 4.1.4 Packages. Packages are procured that meet the construction, lead materials and finishes as specified in MIL-PRF-55310. Package lots are up screened in accordance with the requirements of MIL-PRF-38534 as applicable. Vectron will not perform Salt Spray testing as

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 4
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

MICROCHIP CONFIDENTIAL

part of MIL-PRF-55310 Group C/Qualification or MIL-PRF-38534 Package Element Evaluation.

- 4.1.5 Traceability and Homogeneity. All design pedigrees except option D have active device lots that are homogenous and traceable to the manufacturer's individual wafer; all other elements and materials are traceable to their manufacturer and incoming inspection lots. Design pedigrees E, R, V and X have homogenous material. In addition, swept quartz crystals are traceable to the quartz bar and the processing details of the autoclave lot, as applicable.
- 4.1.6 Enhanced Element Evaluation. When Design Pedigree Option "E" is specified, active and passive devices with Enhanced Element Evaluation as listed in Table 6 and 7 shall be implemented for the highest reliability preference.
- 4.2 Mechanical.
 - 4.2.1 Package Outline. Table 1 links each Hi-Rel Standard Model Number of this specification to a corresponding package style. Mechanical Outline information of each package style is found in the referenced Figure.
 - 4.2.2 Thermal Characteristics. The worst-case thermal characteristics of each package style and active device are found in Table 4.
- 4.3 Electrical.
 - 4.3.1 Input Power. Devices are designed for standard +3.3V, +5.0V or +12V dc operation, $\pm 5\%$. Current is measured at maximum rated operating Voltage.
 - 4.3.2 Temperature Range. Operating range is -55°C to $+125^{\circ}\text{C}$.
 - 4.3.3 Frequency Tolerance. Initial accuracy at $+23^{\circ}\text{C}$ is ± 15 ppm maximum. Frequency-Temperature Stability is ± 50 ppm maximum from $+23^{\circ}\text{C}$ reference. Frequency-Voltage Tolerance is ± 4 ppm maximum.
 - 4.3.4 Frequency Aging. Aging limits, and when tested in accordance with MIL-PRF-55310 Group B inspection, shall not exceed ± 1.5 ppm the first 30 days, ± 5 ppm Year 1 and ± 2 ppm per year thereafter.
 - 4.3.4.1 Frequency Aging Duration Option. By customer request, the Aging test may be terminated after 15 days if the measured aging rate is less than half of the specified aging rate. This is a common method of expediting 30-Day Aging without incurring risk to the hardware and used quite successfully for numerous customers. It is based on the 'least squares fit' determinations of MIL-PRF-55310 paragraph 4.8.35. The 'half the time/half the spec' limit is generally conservative as roughly $2/3$ of a unit's Aging deviation occurs within that period of time. Vectron's automated aging systems take about 6 data points per day, so a lot of data is available to do very accurate projections, much more data than what is required by MIL-PRF-55310. The delivered data would include the Aging plots projected to 30 days. If the units

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 5
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

would not perform within that limit, then they would continue to full 30-Day term. Please advise by purchase order text if this may be an acceptable option to exercise as it assists in Production Test planning.

4.3.5 Operating Characteristics. Sinewave output limits are dependent on the device frequency and supply voltage, and are in accordance with Table 2. Start-up time is 10.0 msec. maximum.

4.3.6 Output Load. 50Ω to ground.

5. QUALITY ASSURANCE PROVISIONS AND VERIFICATION

5.1 Verification and Test. Device lots shall be tested prior to delivery in accordance with the applicable Screening Option letter as stated by the 15th character of the part number. Table 5 tests are conducted in the order shown and annotated on the appropriate process travelers and data sheets of the governing test procedure. For devices that require Screening Options that include MIL-PRF-55310 Group A testing, the Post-Burn-In Electrical Test and the Group A Electrical Test are combined into one operation.

5.1.1 Screening Options. The Screening Options, by letter, are summarized as:

- A Modified MIL-PRF-38534 Class K
- B Modified MIL-PRF-55310 Class B Screening & Group A Quality Conformance Inspection (QCI)
- C Modified MIL-PRF-55310 (Rev E) Class S Screening & Group A QCI
- D Modified MIL-PRF-38534 Class K with Group B Aging
- E Modified MIL-PRF-55310 Class B Screening, Groups A & B QCI
- F Modified MIL-PRF-55310 (Rev E) Class S Screening, Groups A & B QCI
- G Modified MIL-PRF-55310 Class B Screening & Post Burn-in Nominal Electricals
- S MIL-PRF-55310 (Rev F) Class S Screening & Groups A & B QCI
- X Engineering Model (EM)


5.2 Optional Design, Test and Data Parameters. The following is a list of design, assembly, inspection and test options that can be selected or added by purchase order request.

- a. Design Pedigree (choose one as the 5th character in the part number):
 - (E) Enhanced Element Evaluation, 50krad Class S die, Premium Q Swept Quartz
 - (R) Hi-Rel design w/ 300krad Class S die, Premium Q Swept Quartz
 - (V) Hi-Rel design w/ 300krad Class S die, Non-Swept Quartz
 - (X) Hi-Rel design w/ Non-Swept Quartz, Class S die
 - (B) Hi-Rel design w/ Swept Quartz, Class B die
 - (C) Hi-Rel design w/ Non-Swept Quartz, Class B die
 - (D) Hi-Rel design w/ Non-Swept Quartz and commercial grade components
- b. Input Voltage, (A) 3.3V, (B) 5.0V or (C) 12.0V as the 14th character
- c. Frequency-Temperature Slew Test
- d. Radiographic Inspection
- e. Group C Inspection: MIL-PRF-55310, Rev E (requires 8 destruct specimens)

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 6
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

MICROCHIP CONFIDENTIAL

- f. Group C Inspection: MIL-PRF-55310, Rev F (requires 8 destruct specimens, includes Random Vibration, MIL-STD-883, Method 1014 Leak Test and Life Test)
 - g. Group C Inspection: MIL-PRF-38534, Table C-Xc, Condition PI [requires 8 destruct specimens – Life (5), RGA (3)]. Subgroup 1 fine leak test to be performed per MIL-STD-202, Method 112, Condition C.
 - h. Internal Water-Vapor Content (RGA) samples and test performance
 - i. MTBF Reliability Calculations
 - j. Worst Case/Derating Analysis (MIL-HDBK-1547) with $T_j \text{ Max} = +105^\circ\text{C}$; Derated Maximum Operating Temp = $T_j \text{ Max} - \Delta T_j$
 - k. Deliverable Process Identification Documentation (PID)
 - l. Customer Source Inspection (pre-cap / final)
 - m. Destruct Physical Analysis (DPA): MIL-STD-1580 with exceptions as specified in Vectron DOC203982.
 - n. Qualification: In accordance with MIL-PRF-55310, Table IV (requires 11 destruct specimens).
 - o. Qualification: In accordance with EEE-INST-002, Section C4, Table 3, Level 1 or 2 (requires 11 destruct specimens)
 - p. High Resolution Digital Pre-Cap Photographs (20 Megapixels minimum)
 - q. Hot solder dip of leads with Sn63/Pb37 solder prior to shipping.
- 5.2.1 NASA EEE-INST-002. A combination of Design Pedigree R, Option S Screening, and Qualification per EEE-INST-002, Section C4, Table 3, meet the requirements of Level 1 device reliability. A combination of Design Pedigree B, Option S Screening, and Qualification per EEE-INST-002, Section C4, Table 3, meet the requirements of Level 2 device reliability.
- 5.3 Test Conditions. Unless otherwise stated herein, inspections are performed in accordance with those specified in MIL-PRF-55310 and MIL-PRF-38534, in that order. Process travelers identify the applicable methods, conditions and procedures to be used. Examples of electrical test procedures that correspond to MIL-PRF-55310 requirements are shown in Table 3.
- 5.4 Special Tests and Descriptions.
- 5.4.1 Frequency-Temperature Slew. Frequency-Temperature Slew Test has been developed as an indicator of higher than normal internal water vapor content. The incremental temperature sweep from $+125^\circ\text{C}$ to -55°C and back to $+125^\circ\text{C}$ records output frequency fluctuations emulating the mass loading of moisture deposited on the crystal blank surface. Though not replacing a customer's internal water-vapor content (RGA) requirement, confidence is increased without destructively testing otherwise good devices.
- 5.5 Deliverable Data. The manufacturer supplies the following data, as a minimum, with each lot of devices (except devices with Screening Option X):
- a. Completed assembly and screening lot travelers, including rework history and Certificate of Conformance.
 - b. Electrical test variables data, identified by unique serial number.
 - c. Frequency-Temperature Slew plots, Radiographic films, Group C data and RGA data as required by purchase order.

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 7
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

MICROCHIP CONFIDENTIAL

d. Traceability, component LAT, enclosure LAT and RLAT (if specifically requested on the purchase order).

5.6 Discrepant Material. All MRB authority resides with the procuring activity.

5.7 Failure Analysis. Any catastrophic failure (no clocking, no current) at Post Burn-In or after will be evaluated for root cause. The customer will be notified after occurrence and upon completion of the evaluation.

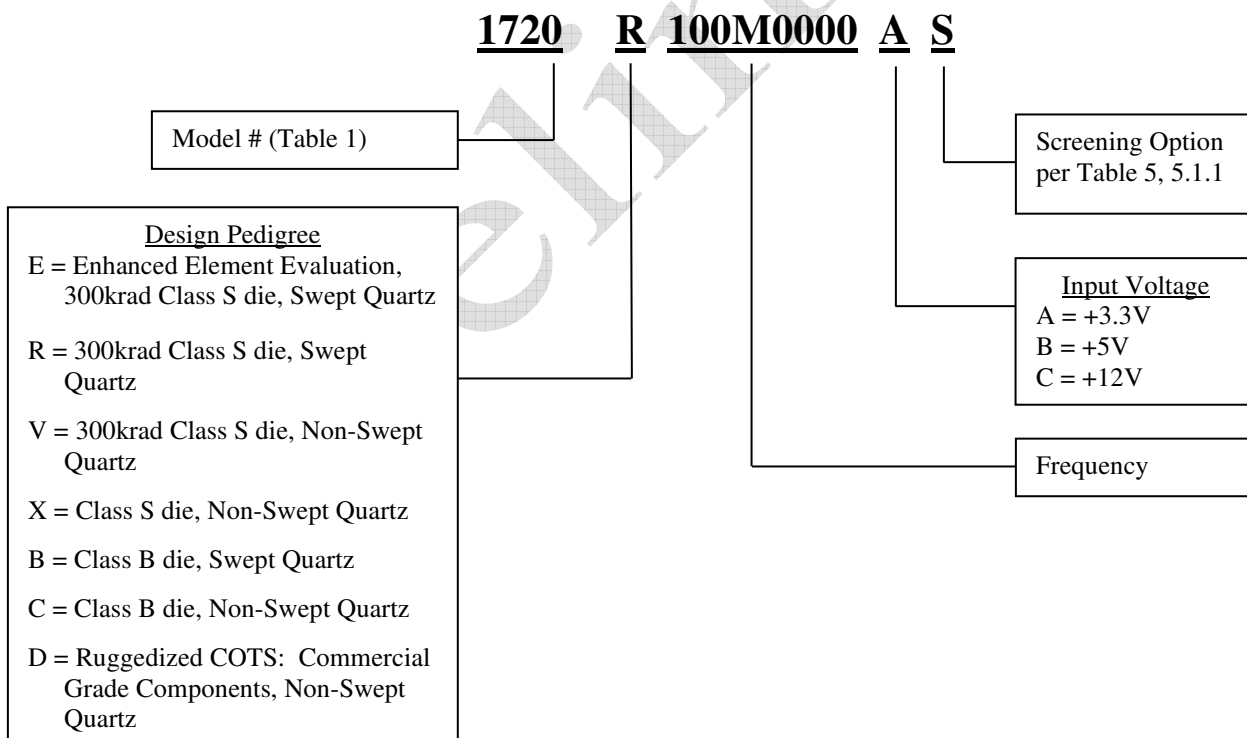
6. PREPARATION FOR DELIVERY

6.1 Packaging. Devices will be packaged in a manner that prevents handling and transit damage during shipping. Devices will be handled in accordance with MIL-STD-1686 for Class 1 devices.

7. ORDERING INFORMATION

7.1 Ordering Part Number. The ordering part number is made up of an alphanumeric series of 15 characters. Design-affected product options, identified by the parenthetic letter on the Optional Parameters list (¶ 5.2a and b), are included within the device part number.

The Part Number breakdown is described as:



SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 8
------------------	--------------------------------	----------------------------	--------------------------------------	-----------------------------	------------------	-------------------

- 7.1.1 Model Number. The device model number is the four (4) digit number assigned to a corresponding package and output combination per Table 1.
- 7.1.2 Design Pedigree. Class S variants correspond to either letter “E”, “R”, “V” or “X” and are described in paragraph 5.2a. Class B variants correspond to either letter “B” or “C” and are described in paragraph 5.2a. Ruggedized COTS, using commercial grade components, corresponds to letter “D”.
- 7.1.3 Output Frequency. The nominal output frequency is expressed in the format as specified in MIL-PRF-55310 utilizing eight (8) characters.
- 7.1.4 Input Voltage. Voltage is the 14th character.
- 7.1.5 Screening Options. The 15th character is the Screening Option (letter A thru G, S or X) selected from Table 5.
- 7.2 Optional Design, Test and Data Parameters. Optional test and documentation requirements shall be specified by separate purchase order line items (as listed in ¶ 5.2c thru q).

MODEL #	PACKAGE	MECHANICAL OUTLINE AND I/O CONNECTIONS
1704	20 Lead Flatpack	Figure 2
1720 <u>1/</u>	20 Lead Flatpack	Figure 3
1719	16 Lead Flatpack	Figure 4
1721 <u>1/</u>	16 Lead Flatpack	Figure 5

1/. Models 1720 and 1721 are lead-formed versions of Models 1704 and 1719 respectively. See Appendix A for recommended land patterns.

TABLE 1 - Item Identification and Package Outline

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 9
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

MICROCHIP CONFIDENTIAL


Frequency Range: 100 MHz to 200 MHz (16x16mm, 20-pin FP) >200 MHz to 500 MHz (25x25mm, 16-pin FP)				
Temperature Range: -55°C to +125°C				
Frequency Tolerance, Initial Accuracy @ +23°C: ±15 ppm max.				
Frequency-Temperature Stability from +23°C ref.: ±50 ppm max.				
Frequency-Voltage Tolerance: ±4 ppm max. (Vcc ±5%)				
Frequency Aging: ±1.5 ppm max. 1 st 30 days, ±5 ppm max. Year 1, ±2 ppm max. Year 2+				
Start-up Time: 10.0 ms max.				
Harmonics: -20 dBc max.				
Non-Harmonic Spurious: -80 dBc max. 1/				
Phase Noise: See Figure 1 herein.				
Frequency Range (MHz)	Vcc ± 5% (V)	Input Current at max Vcc (mA max)	Output Power (dBm min)	Sub-Harmonics (dBc max)
100 - 200	+3.3	20	+3	-
	+5.0	20	+5	-
	+12.0	20	+7	-
> 200 - 500	+3.3	30	+3	-30
	+5.0	30	+5	-30
	+12.0	30	+7	-30

1/. Met by design and not tested.

TABLE 2 - Electrical Performance Characteristics

OPERATION LISTING	REQUIREMENTS AND CONDITIONS
@ all Electrical tests	
Input Current (no load)	MIL-PRF-55310, Para 4.8.5.1
Initial Accuracy @ Ref. Temp.	MIL-PRF-55310, Para 4.8.6
Output Power	MIL-PRF-55310, Para 4.8.21.2
Harmonics/Sub-harmonics	
@ Post Burn-In Electrical only	
Overvoltage Survivability	MIL-PRF-55310, Para 4.8.4
Initial Freq. – Temp. Accuracy	MIL-PRF-55310, Para 4.8.10.1
Freq. – Voltage Tolerance	MIL-PRF-55310, Para 4.8.14
Start-up Time (fast/slow start)	MIL-PRF-55310, Para 4.8.29

TABLE 3 - Electrical Test Parameters

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 10
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

MICROCHIP CONFIDENTIAL

Model #	Thermal Resistance Junction to Case θ_{jc} ($^{\circ}\text{C} / \text{W}$)	Worst Case Δ Junction Temp. T_j ($^{\circ}\text{C}$ @ max. power)	Typical Weight (Grams)
16x16mm, 20-pin FP	14.3	3.6	3.0
25x25mm, 16-pin FP	15.1	5.7	7.5

Note. The maximum current and voltage from Table 2 is used to calculate the worst case Δ junction temperature for the model series.

TABLE 4 - Thermal Characteristics and Weight

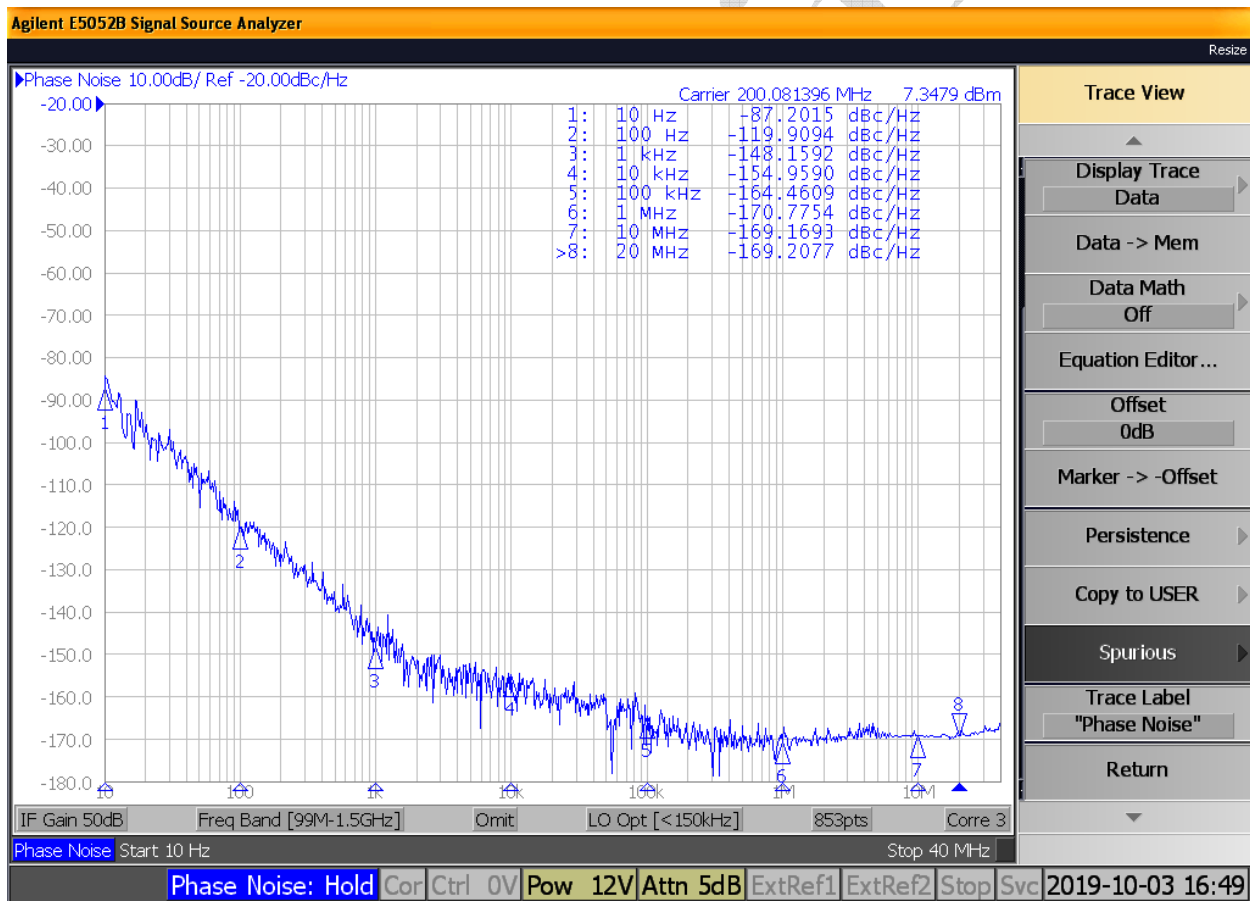



FIGURE 1 – Typical Phase Noise @ 200MHz 12V

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 11
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

OPN. NO.	OPERATION LISTING	REQUIREMENTS AND CONDITIONS	Option A	Option B	Option C	Option D	Option E	Option F	Option G	Option S	Option X
	SCREENING	MIL Class Similarity (MIL-PRF-55310, Class S/B or MIL-PRF-38534, Class K)	K 100%	B- 100%	S- 100%	K+ 100%	B 100%	S (Rev E) 100%		S (Rev F) 100%	EM 100%
1	Non-Destruct Bond Pull	MIL-STD-883, Meth 2023	X	NR	X	X	NR	X	NR	X	NR
2	Internal Visual	MIL-STD-883, Meth 2017 Class K, Meth 2032 Class K	X	X	X	X	X	X	X	X	X
3	Stabilization (Vacuum) Bake	MIL-STD-883, Meth 1008, Cond C, 150°C	X 48 hrs.	X 24 hrs.	X 48 hrs.	X 48 hrs.	X 24 hrs.	X 48 hrs.	X 24 hrs.	X 48 hrs.	X 24 hrs.
4	Thermal Shock	MIL-STD-883, Meth 1011, Cond A	NR	NR	X	NR	NR	X	NR	X	NR
5	Temperature Cycle	MIL-STD-883, Meth 1010, Cond. B (except Option S), 10 cycles min.	X	X	X	X	X	X	X	X Cond. C	NR
6	Constant Acceleration	MIL-STD-883, Meth 2001, Cond A, Y1 plane only, 5000 g's	X	X	X	X	X	X	X	X	NR
7	Particle Impact Noise Detection	MIL-STD-883, Meth 2020, Cond B (except Option S)	X	X	X	X	X	X	NR	X Cond. A	X
8	Electrical Testing, Pre Burn-In	Perform tests in Table 3. Nominal Vcc, nominal temperature	X	X	X	X	X	X	X	X	X
9	1 st Burn-In	MIL-STD-883, Meth 1015, Condition B	X 160 hrs.	X 160 hrs.	X 240 hrs.	X 160 hrs.	X 160 hrs.	X 240 hrs.	X 160 hrs.	X 240 hrs.	NR
10	Electrical Testing, Intermediate	Perform tests in Table 3. Nominal Vcc, nominal temperature	X	NR	NR	X	NR	NR	NR	NR	NR
11	2 nd Burn-In	MIL-STD-883, Meth 1015, Condition B	X 160 hrs.	NR	NR	X 160 hrs.	NR	NR	NR	NR	NR
12	Freq-Temp Slew Test	Operating temp. range, frequency plotted at 1.0°C steps	AR	AR	AR	AR	AR	AR	NR	AR	NR
13	Electrical Testing, Post Burn-In (Group A)	Perform tests in Table 3. Nominal Vcc & extremes, nominal temperature & extremes	X	X	X	X	X	X	X nom. Vcc	X	NR
14	Seal: Fine Leak Seal: Gross Leak	MIL-STD-202, Meth 112, Cond C (5 x 10 ⁻⁸ atm cc/sec max) MIL-STD-202, Meth 112, Cond D	X	X	X	X	X	X	X	NR	X
15	Seal: Fine Leak Seal: Gross Leak	MIL-STD-883, Meth 1014, Cond A2 or B1 MIL-STD-883, Meth 1014, Cond B2 or B3	NR	NR	NR	NR	NR	NR	NR	X	NR
16	Radiographic Inspection	MIL-STD-883, Meth 2012	X	AR	AR	X	AR	X	NR	X	NR
17	Solderability	MIL-STD-883, Meth 2003	1/	1/	1/	1/	1/	1/	1/	1/	NR
18	External Visual & Mechanical	MIL-STD-883, Meth 2009	X 2/	X 2/	X 2/	X 2/	X 2/	X 2/	X 2/	X 2/	X 2/
19	Aging, 30 Day 3/ (M55310 Group B)	MIL-PRF-55310, para. 4.8.35.1	NR	NR	NR	X	13 pcs.	X	NR	X	NR
20	Group C Inspection (optional)	See Para 5.2 herein for details of supplier recommended Group C Inspection options	5.2(g)	5.2(e)	5.2(e)	5.2(g)	5.2(e)	5.2(e)	5.2(e)	5.2(f)	NR

LEGEND: X = Required, NR = Not Required, AR = As Required

TABLE 5 - Test Matrix

1/ Performed at package LAT. Include LAT data sheet.

2/ When specified, RGA samples will be removed from the lot after completion of this operation. Use of Screening failures require customer concurrence.

3/ By customer request, the Aging test may be terminated after 15 days if the measured aging rate is less than one-half the specified aging rate, as described in paragraph 4.3.4.1 herein. Must be explicitly stated on the customer PO.

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 12
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------


MICROCHIP CONFIDENTIAL

Subgroup	Class	Test	Mil-STD-883		Quantity (accept number)	Mil-PRF-38534 Reference Paragraph
			Method	Condition		
1	X	Element Electrical A. May perform at wafer level B. All failures shall be removed from the lot C. Perform at room ambient			100%	C.3.3.1
2	X	Element Visual	2010		100%	C.3.3.2
3	X	Internal Visual	2010		10(0) or 22(0)	C.3.3.3 C.3.3.4.2
4	X	Temperature Cycling	1010	C	10(0) 22(0)	C.3.3.3
	X	Mechanical Shock or Constant Acceleration	2002 2001	B, Y1 direction 3,000 G, Y1 direction		
	X	Interim Electrical				C.3.3.4.3
	X	Burn-In	1015	240 hours minimum at +125°C		
	X	Post Burn-In Electrical				C.3.3.4.3
	X	Steady State Life	1005			
	X	Final Electrical				C.3.3.4.3
5	X	Wire Bond Evaluation	2011		10(0) wires or 20(1) wires	C.3.3.3 C.3.3.5
6	X	SEM	2018		See method 2018	C.3.3.6

Notes:

Subgroups 3, 4, & 5 shall be performed on a sample of 10 die if the wafer lot is from a QPL/QML line. If the die are from commercial wafer lots, then the sample size shall be 22 die.


TABLE 6 - MICROCIRCUIT ENHANCED ELEMENT EVALUATION

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 13
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

MICROCHIP CONFIDENTIAL

Subgroup	Class K	Test	Mil-STD-750		Quantity (accept number)	Mil-PRF-38534 Reference Paragraph
			Method	Condition		
1	X	Element Electrical A. May perform at wafer level B. All failures shall be removed from the lot		Perform at room ambient	100%	C.3.3.1
2	X	Element Visual	2069, 2070, 2072, 2073		100%	C.3.3.2
3	X	Internal Visual	2069, 2070, 2072, 2073, 2074		10(0) or 22(0) (Notes 1 & 2)	C.3.3.3 C.3.3.4.2
4	X	Temperature Cycling	1051	C	10(0) 22(0) (See Notes 1 & 2)	C.3.3.3
	X	Surge Current (when applicable)	4066	A or B as specified		
	X	Constant Acceleration	2006 2001	Y1 direction 20,000 G / 10,000 G for Pd ≥ 10W		
	X	Interim Electrical				C.3.3.4.3
	X	High Temperature Reverse Bias (HTRB)	1039 1042 1038	A B A		
	X	Interim Electrical & Delta		Complete Within 16 hrs of HTRB completion		
	X	Burn-In 240 hours	1039, 1042 1038 1040	B A B		
	X	Post Burn-In Electrical				C.3.3.4.3
	X	Steady State Life 1000 hours	1026 1037 1042 1048			
	X	Final Electrical				C.3.3.4.3
5	X	Wire Bond Evaluation	2011		10(0) wires or 20(1) wires	C.3.3.3 C.3.3.5
6	X	SEM	2018 2077		See method 2018 or 2077 & Note 2	C.3.3.6

TABLE 7: SEMICONDUCTOR ENHANCED ELEMENT EVALUATION

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 14
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

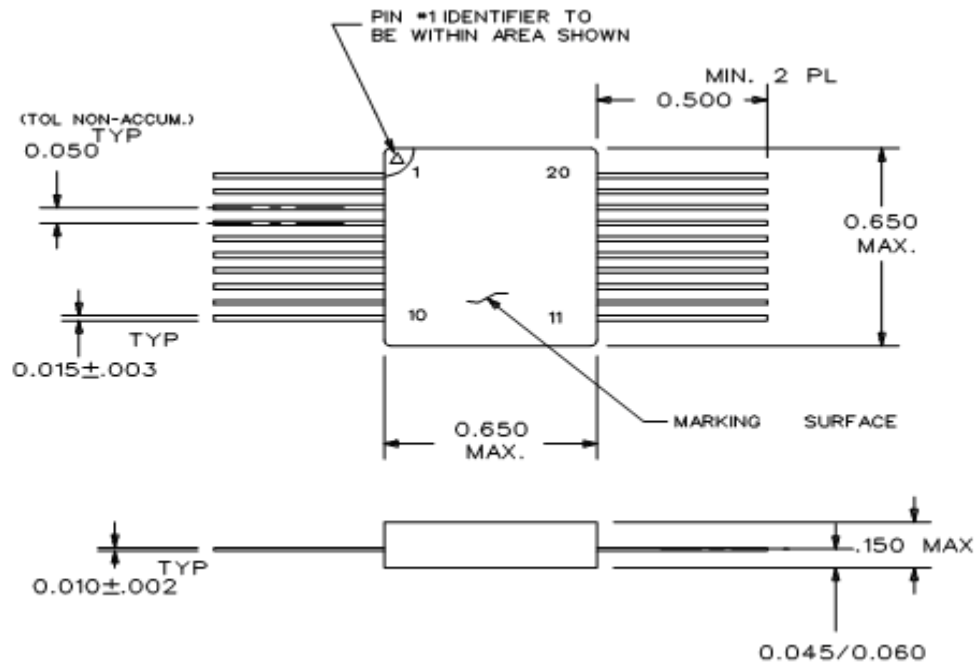
MICROCHIP CONFIDENTIAL

Part Type	Test	Requirements Paragraph	Sample Size	Allowable Rejects
Ceramic capacitors (Production lot definition shall be per M55681 or M123 for chips, or M49470 T-level for stacks)				
M55681 FRL S or M123 (chips)	N/A	N/A	N/A	N/A
DSCC Dwg COTS (chips)	Ultrasonic scan or CSAM	M123	100%	N/A
	Group A	M123	M123	M123
	Group B, Subgroups 1 & 2	M123	M123	M123
T-level M49470 (stacked)	N/A	N/A	N/A	N/A
General purpose M49470, DSCC dwg or COTS (stacked)	Ultrasonic scan or CSAM	M49470 for T-level	100%	N/A
	Group A	M49470 for T-level	M49470 for T-level	M49470 for T-level
	Group B, Subgroups 2, 4 & 5b	M49470 for T-level	M49470 for T-level	M49470 for T-level
Tantalum Chip Capacitors (Note: Stacking tantalum chips will require a repeat of the entire Group A in M55365 with minimum Weibull C and surge current option C. Production lot definition shall be per M55365.)				
M55365	Group A (Weibull C minimum with surge current option C)	M55365	M55365	M55365
DSCC Dwg, COTS	Group A (Weibull C minimum with surge current option C)	M55365	M55365	M55365
	Group B	M55365	M55365	M55365
Resistor Chips (Note: Gluing one resistor chip on top of another to change a design or save on real estate is not allowable without extensive design/process verification, long term testing, and hybrid re-qualification. Production lot definition shall be per M55342).				
M55342 FRL R or S	N/A	N/A	N/A	N/A
DSCC Dwg, COTS	Group A	M55342 for T-level	M55342 for T-level	M55342 for T-level
	Group B	M55342 for T-level	M55342 for T-level	M55342 for T-level
Inductors (See Paragraph 4.1.2)				
Magnetics, Closed Construction Leaded and Surface Mount (transformers, inductors, coils) (Note: Stacking magnetics shall be qualified and the effects of the long term performance of the hybrids verified. When stacking magnetics, a repeat of the thermal cycling plus electrical measurements as specified in Group A of Mil-Std-981. Design, workmanship and materials/processes shall conform to MIL-STD-981 requirements).				
Magnetics, Open Construction are unencapsulated and unpotted self-leaded parts consisting of magnet wire wound around a magnetic core. These parts are fully visually inspectable. Open construction magnetics shall be subjected to 100% electrical measurements and visual inspection per Mil-Std-981.				
Custom closed magnetics	Group A	Mil-STD-981	Mil-STD-981	Mil-STD-981
	Group B	Mil-STD-981	Mil-STD-981	Mil-STD-981

TABLE 8: PASSIVE COMPONENT ENHANCED ELEMENT EVALUATION


SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 15
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

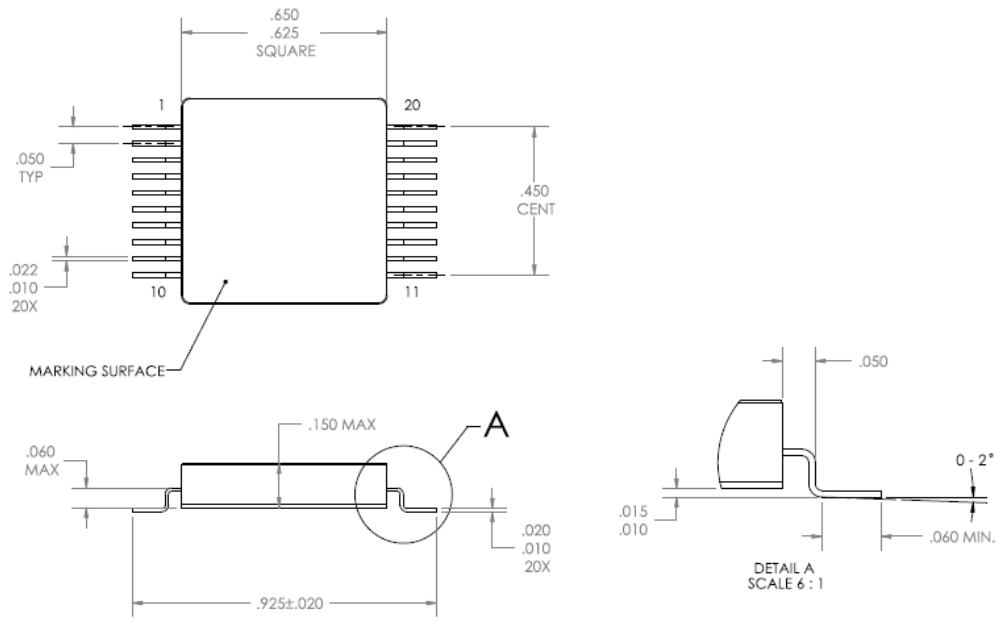
MICROCHIP CONFIDENTIAL



Model #	I/O Connections		
	Vcc	Output	Gnd/Case
1704	13,20	11	10

FIGURE 2
Model 1704 Package Outline and I/O Connections

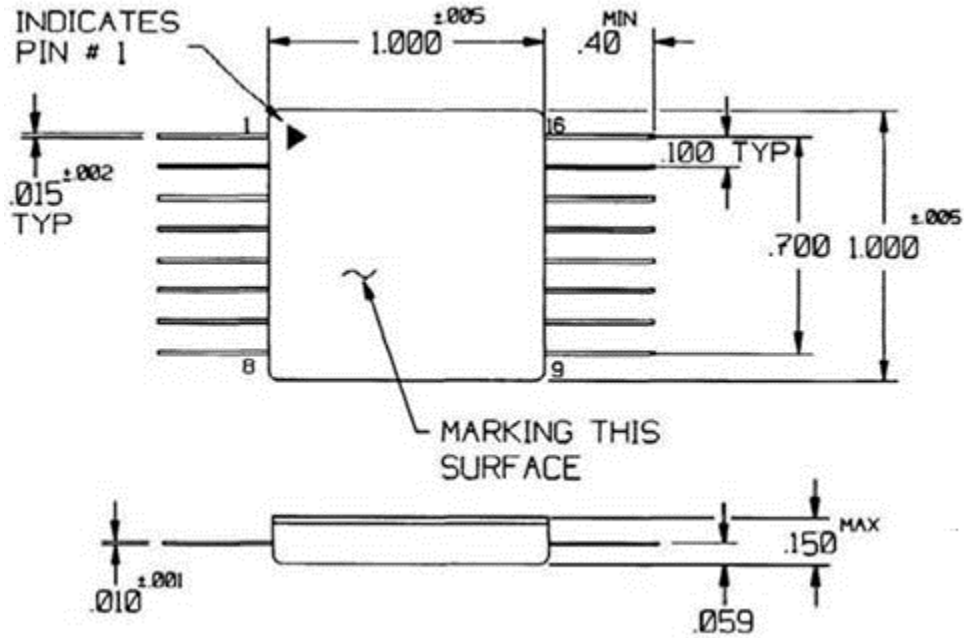
SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 16
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------



Model #	I/O Connections		
	Vcc	Output	Gnd/Case
1720	13,20	11	10


FIGURE 3
Model 1720 Package Outline and I/O Connections

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 17
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

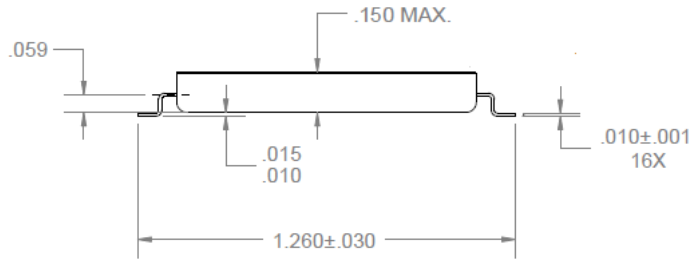
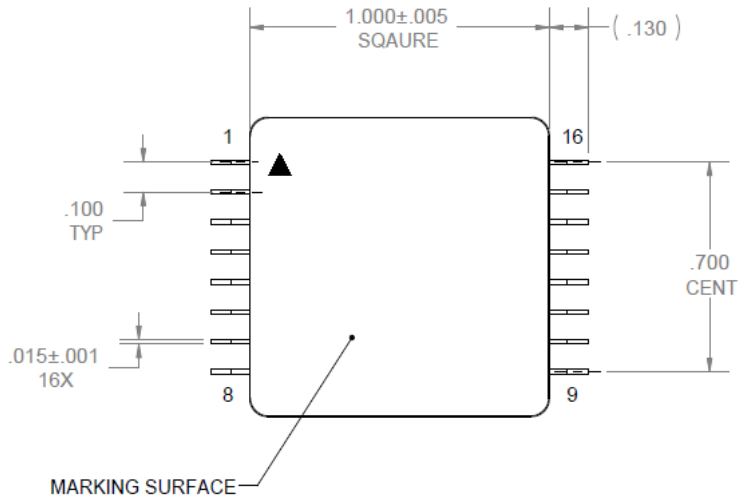


Model #	I/O Connections		
	Vcc	Output	Gnd/Case
1719	16	9	8, 11

Figure 4
Model 1719 Package Outline and I/O Connections

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 18
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

MICROCHIP CONFIDENTIAL



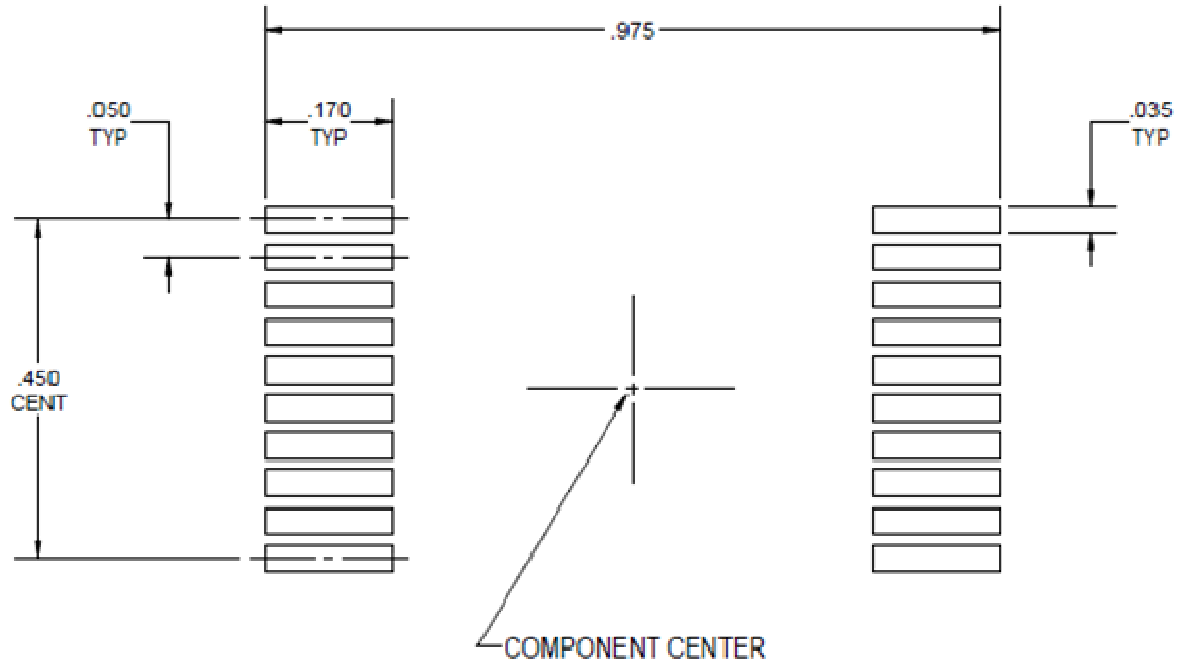
Model #	I/O Connections		
	Vcc	Output	Gnd/Case
1721	16	9	8, 11

Figure 5
Model 1721 Package Outline and I/O Connections

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 19
------------------	--------------------------------	----------------------------	--------------------------------------	-----------------------------	------------------	--------------------


MICROCHIP CONFIDENTIAL

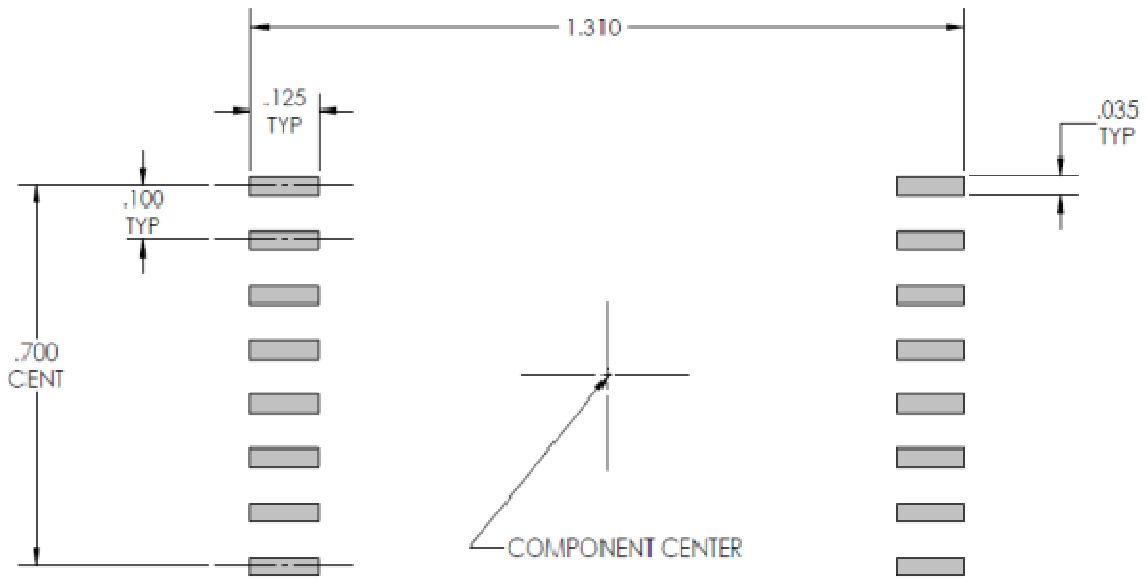
APPENDIX A
Recommended Land Patterns



Model 1720


Preview

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 20
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------



Model 1721

Preliminary

SIZE A	CODE IDENT NO. 00136	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES N/A	DWG NO. DOC207975	REV. A	SHEET 21
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

MICROCHIP CONFIDENTIAL