
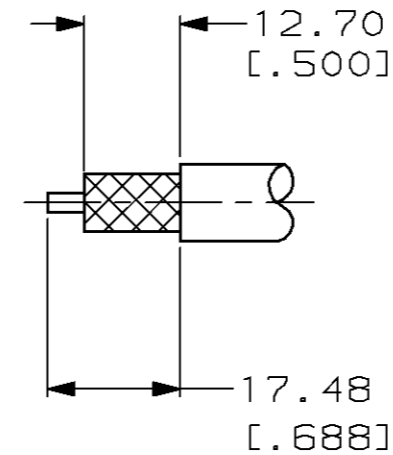
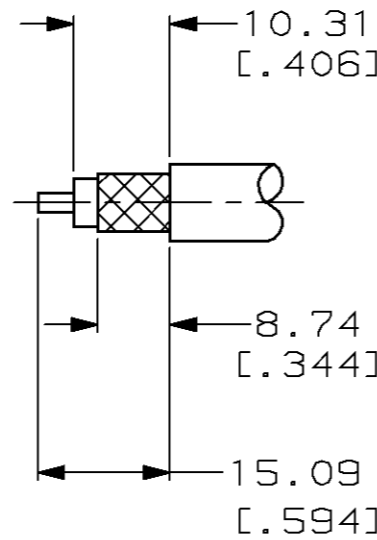


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AJ	16				E	REACT -3 PER AJ-6347	5-20-92	MS
		✓	✓		F	REACTIVATE -9 PER AJ-6543	1-28-93	MS

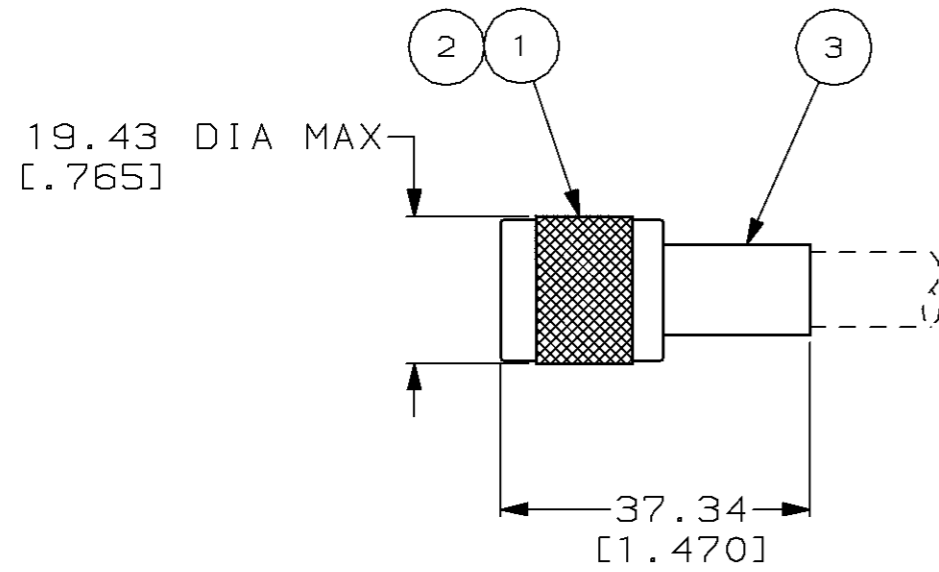

1. SEE INSTRUCTION SHEET #2259-1.

VIEW A VIEW B
 RECOMMENDED STRIP LENGTH

B	220015-1	RG-216/U	51713-2	225354-2	225351-1	225013-9
A	220045-2	RG-58C/U	50427-1	225205-2	225206-1	225013-3
STRIP VIEW	TOOL NO.	CABLE	③ FERRULE QTY=1	② CONTACT QTY=1	① PLUG ASSY QTY=1	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.41 [.016] 3 PLC DEC ± - ANGLES ± -		DR 5-20-92 M. SNEED	AMP Incorporated Harrisburg, PA 17105-3608
MATERIAL -	CHK 5-20-92 B. MOYER	NAME PLUG, SERIES C	
FINISH -	APPD 5-20-92 B. MOYER	SIZE B	CAGE CODE 00779
	APPD 5-20-92 M. SNEED	SCALE 1:1	DRAWING NO 225013
	PRODUCT SPEC 108-12005		SHEET 1 OF 1
	APPLICATION SPEC -		
	WEIGHT -		