


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

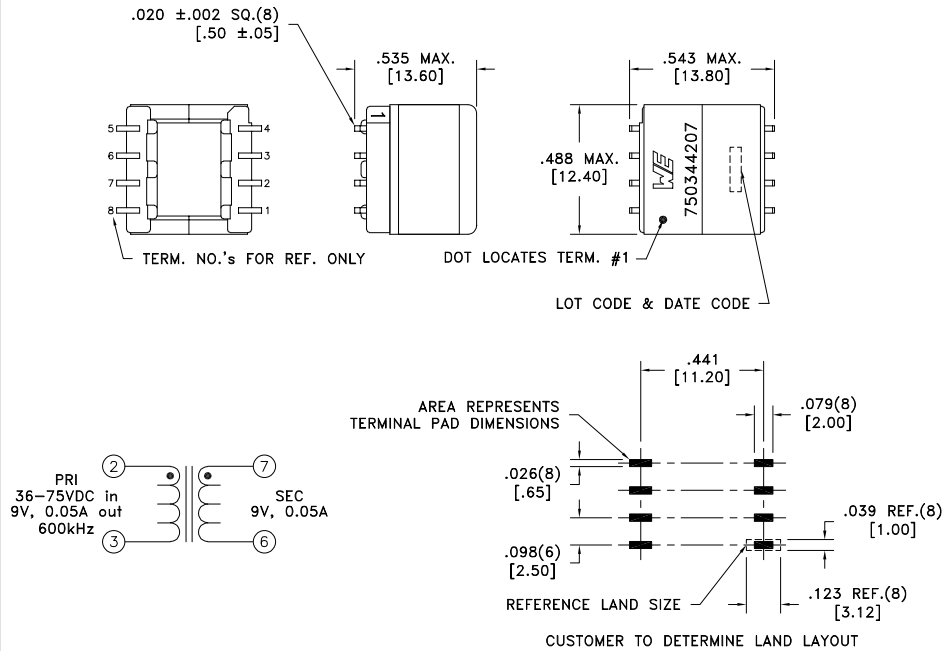

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-3 @20°C	0.370 ohms max.
D.C. RESISTANCE	7-6 @20°C	0.460 ohms max.
INDUCTANCE	2-3 100kHz, 100mVAC, Ls	150.00uH ±10%
LEAKAGE INDUCTANCE	2-3 tie(6+7), 100kHz, 100mVAC, Ls	3.4uH max.
DIELECTRIC	2-7 3000VAC, 1 second	-
URNS RATIO	(2-3):(7-6)	1:1

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel		Angles: $\pm 1^\circ$	TRANSFORMER	750344207
		PKG-1188		Fractions: $\pm 1/64$		
		www.we-online.com/midcom		Decimals: $\pm .005$ [$.13$]		
				Footprint: $\pm .005$ [$.13$]		
6A	7/21	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750344207	SPECIFICATION SHEET 1 OF 1

