

- Good Phase Noise over MIL temperature range
- Wide frequency range
- Output Squarewave, AC MOS available 1.25MHz to 50MHz
- Output PECL available
- Industry-standard dual-in-line package




DESCRIPTION

ZT620 series TCXOs are standard-packaged parts providing extended shock and vibration performance with close tolerance temperature stability. The part provides tight stability from $\pm 2 \times 10^{-7}$ ppm over -10° to $+60^\circ\text{C}$.

GENERAL SPECIFICATION

Frequency Range:	1.25MHz to 300.0MHz
Output	Model ZT620/ZT621: Squarewave, AC MOS (available from 1.25MHz to 50.0MHz)
	Model ZT622/ZT623: PECL (available from 50MHz to 300MHz)
Load	AC MOS: 15pF $\pm 5\%$
	PECL: 50 Ω to $V_{\text{SUPPLY}} - 2.0\text{V}$
Symmetry:	50% $\pm 10\%$
Ageing:	$\pm 2 \times 10^{-9}$ per day after 30 days
Input Voltage	ZT620 & ZT622: +5.0VDC $\pm 5\%$
	ZT621 & ZT623: +3.3VDC $\pm 5\%$
Frequency Adjust:	± 5 ppm typical positive slope 0 to V_{SUPPLY} EFC

OUTLINES AND DIMENSIONS

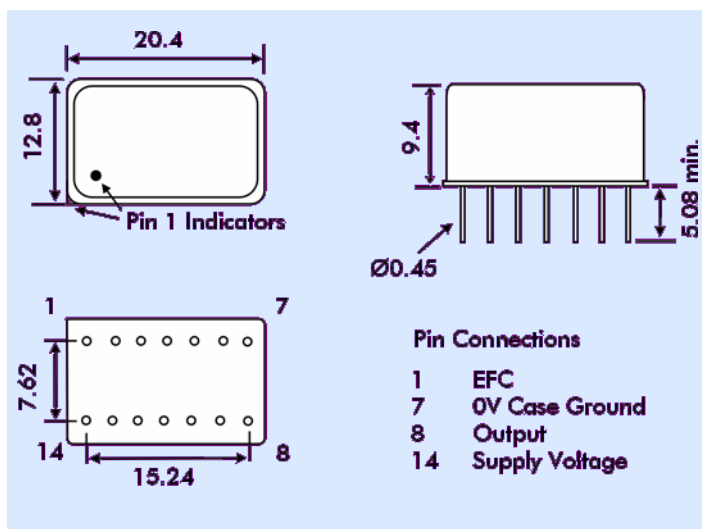


STABILITY OVER TEMPERATURE

Temp. Range	Stability	Part No. Code
$-10 \sim +60^\circ\text{C}$	$\pm 2 \times 10^{-7}$ ppm	G27
$-20 \sim +70^\circ\text{C}$	$\pm 3 \times 10^{-7}$ ppm	N37
$-40 \sim +85^\circ\text{C}$	$\pm 5 \times 10^{-7}$ ppm	T57
$-40 \sim +85^\circ\text{C}$	$\pm 12 \times 10^{-6}$ ppm	T16

PART NUMBERING

Example: **ZT620-N27-10.0MHz**

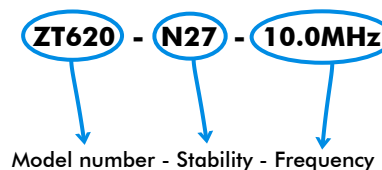

PHASE NOISE (At 10MHz, Typical)

Offset	dBc/Hz
10Hz	-95
100Hz	-125
1kHz	-140
10kHz	-150
100kHz	-155