


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KD-59-26

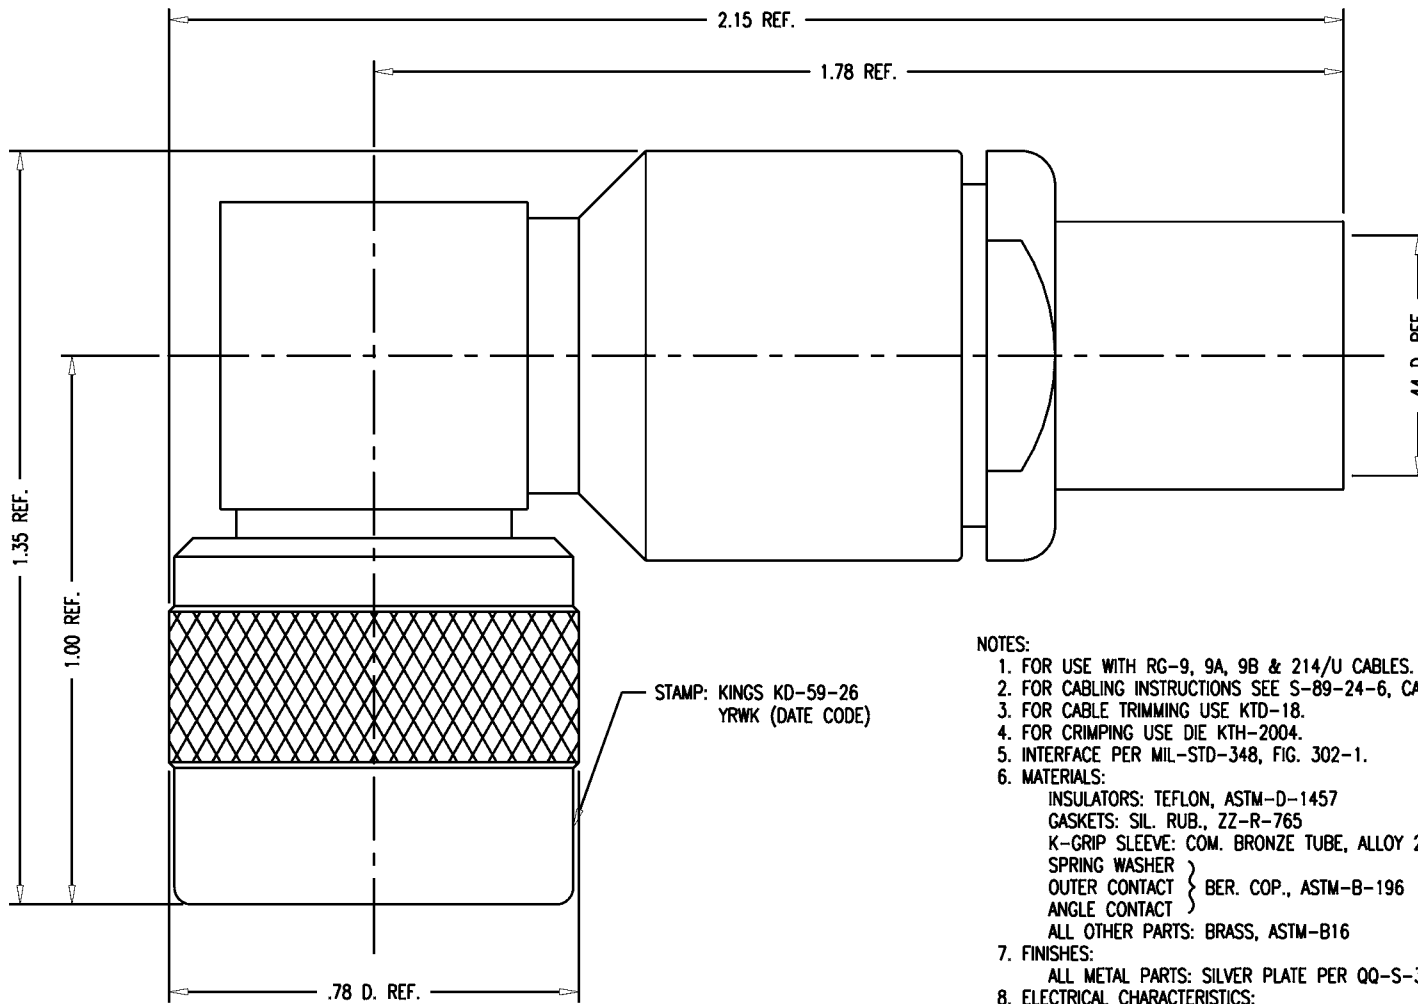

NOTES:

- FOR USE WITH RG-9, 9A, 9B & 214/U CABLES.
- FOR CABLING INSTRUCTIONS SEE S-89-24-6, CABLE TRIM CODE 6.
- FOR CABLE TRIMMING USE KTD-18.
- FOR CRIMPING USE DIE KTH-2004.
- INTERFACE PER MIL-STD-348, FIG. 302-1.
- MATERIALS:
 INSULATORS: TEFLON, ASTM-D-1457
 GASKETS: SIL. RUB., ZZ-R-765
 K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
 SPRING WASHER } BER. COP., ASTM-B-196
 OUTER CONTACT }
 ANGLE CONTACT }
 ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
 ALL METAL PARTS: SILVER PLATE PER QQ-S-365
- ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 1000 VRMS
 FREQUENCY RANGE: DC TO 11 GHz

REVISIONS

ISSUE	CHANGES
6	CN 38579 C REDRAWN TML 08/06/02

KD-59-26S

SCALE	4:1		
APPROX SURFACE AREA			
USED ON			
REF:			
PLUG, ANGLE, C			
DRAWN	JCA	DATE	11/25/92
DESIGN	MJB	DATE	11/25/92
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KD-59-26

GSD