

Split Bobbin PC Board Transformers




The use of a Split Bobbin allows winding to be nonconcentric (side-by-side), consequently high isolation is achieved at low cost.

- Better insulation — 2500 VRMS hipot is standard.
- Lower capacitance — no need for electro-static shield.

Please note that the standard items listed below utilize 6 or 8 pins, while 12 pins are available. We would like to quote your more complex requirements... you may save cost and space by combining two less complex Transformers into one.

We would also be glad to quote your less complex requirements. For example, if only a Single Primary and Single Secondary are needed, you can save considerable cost by utilizing only 4 Pins.

CUSTOM PROTOTYPES AVAILABLE WITHIN ONE WEEK

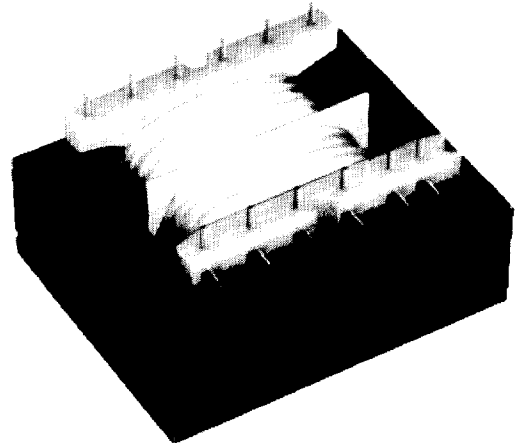

STANDARD TRANSFORMERS

	Part Number		Secondary RMS Ratings		Ht.	Ap- prox. Lbs.
	Single 115V Pri.	Dual 115/ 230V Pri.	Series	Parallel		
LOW PROFILE	L-10	DL-10	10VCT @ 2A	5V @ 4A	1.34	.75
	L-12	DL-12	12.6VCT @ 1.6A	6.3V @ 3.2A	1.34	.75
	L-16	DL-16	16VCT @ 1.25A	8V @ 2.5A	1.34	.75
	L-20	DL-20	20VCT @ 1A	10V @ 2A	1.34	.75
	L-24	DL-24	24VCT @ .8A	12V @ 1.6A	1.34	.75
	L-32	DL-32	32VCT @ .625A	16V @ 1.25A	1.34	.75
	L-40	DL-40	40VCT @ .5A	20V @ 1A	1.34	.75
	L-48	DL-48	48VCT @ .4A	24V @ .8A	1.34	.75
	L-80	DL-80	80VCT @ .25A	40V @ .5A	1.34	.75
	L-120	DL-120	120VCT @ .16A	60V @ .32A	1.34	.75
M-10	DM-10	10VCT @ 2.4A	5V @ 4.8A	1.55	.9	
M-12	DM-12	12.6VCT @ 1.9A	6.3V @ 3.8A	1.55	.9	
M-16	DM-16	16VCT @ 1.5A	8V @ 3A	1.55	.9	
M-20	DM-20	20VCT @ 1.2A	10V @ 2.4A	1.55	.9	
M-24	DM-24	24VCT @ 1A	12V @ 2A	1.55	.9	
M-32	DM-32	32VCT @ .75A	16V @ 1.5A	1.55	.9	
M-40	DM-40	40VCT @ .6A	20V @ 1.2A	1.55	.9	
M-48	DM-48	48VCT @ .5A	24V @ 1A	1.55	.9	
M-80	DM-80	80VCT @ .3A	40V @ .6A	1.55	.9	
M-120	DM-120	120VCT @ .2A	60V @ .4A	1.55	.9	
H-10	DH-10	10VCT @ 3A	5V @ 6A	1.79	1.1	
H-12	DH-12	12.6VCT @ 2.4A	6.3V @ 4.8A	1.79	1.1	
H-16	DH-16	16VCT @ 1.8A	8V @ 3.6A	1.79	1.1	
H-20	DH-20	20VCT @ 1.5A	10V @ 3A	1.79	1.1	
H-24	DH-24	24VCT @ 1.25A	12V @ 2.5A	1.79	1.1	
H-32	DH-32	32VCT @ .95A	16V @ 1.9A	1.79	1.1	
H-40	DH-40	40VCT @ .75A	20V @ 1.5A	1.79	1.1	
H-48	DH-48	48VCT @ .625A	24V @ 1.25A	1.79	1.1	
H-80	DH-80	80VCT @ .375A	40V @ .75A	1.79	1.1	
H-120	DH-120	120VCT @ .25A	60V @ .5A	1.79	1.1	

