

Common Mode Inductor

Parameter	Min.	Max.	Units
Inductance *	33		mH
DCR		3.5	Ω
Current		0.3	A _{RMS}
Leakage Inductance *		0.5	μ H
SRF	150		kHz

* Inductance tested at 100mV_{RMS} and 100 kHz

Rated Voltage 250 VAC


Hipot (Isolation) 2500 VAC

Insulation Resistance 100M Ω


Temperature Rise 60°C Max.

Operating Temperature Range -25°C to +60°C

Schematic Diagram

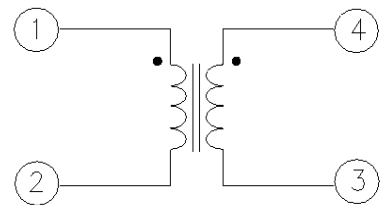

Physical Dimensions
inches (mm)

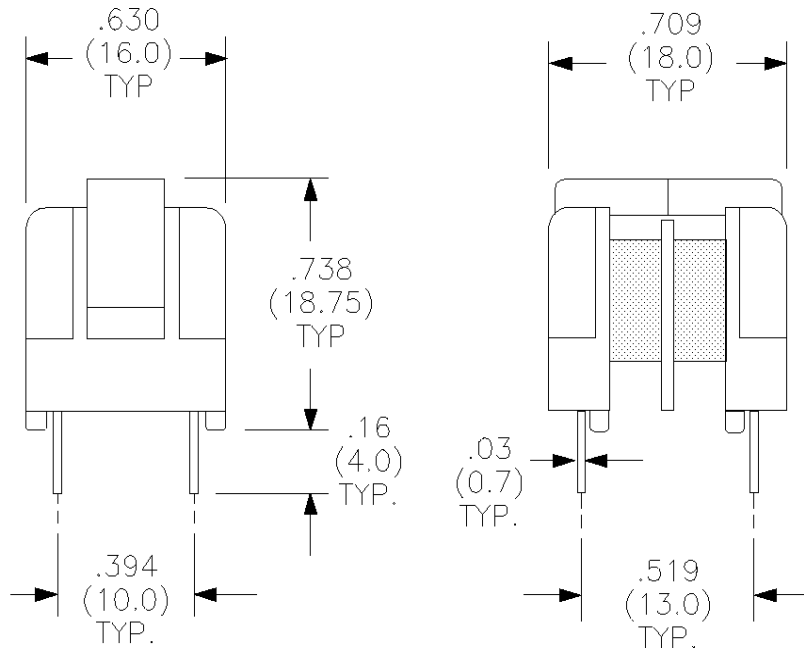

RHOMBUS P/N: **L-319**

CUST P/N:

NAME:

DATE: **11/22/96**

SHEET: 1 OF 1