



Series 0517 Pin-Line Vertisockets™

FEATURES:

- For mounting components, jumpers, etc., at right angle to PC board.
- Available 1 to 25 positions; cuttable to any number desired.

SPECIFICATIONS:

- Standard body material is red UL 94-HB Glass-filled Nylon.
- High temp body material is black UL 94V-0 4/6 Nylon.
- Pin body is Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-85.
- Pin body plating is 200μ [5.08μm] 93/7 Tin/Lead per MIL-P-81728 over 100μ [2.54μm] Nickel per QQ-N-290.
- 4-fingered collet contact is Beryllium Copper Alloy per UNS C17200 ASTM-B194-92.
- Contact plating is 30μ [.76μm] Gold per MIL-G-45204 over 50μ [1.27μm] Nickel per QQ-N-290.
- Contact current rating=3 Amps.
- Operating temperature=221°F [105°C].
- Insertion Force=180 grams/pin; Withdrawal Force=90 grams/pin; Normal Force=140 grams/pin; based on a .018 [.46] diameter test lead.
- Accepts leads .015-.025 [.38-.64] in diameter, .110-.150 [2.79-3.81] long.

MOUNTING CONSIDERATIONS:

- Suggested PCB hole size=.035 ± .002 [.89 ± .05] dia.



Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION

XX-0517-90CXX





ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances ± .005 [.13] unless otherwise specified

"A"=NO. OF PINS X .100 [2.54]

"B"=(NO. OF PINS - 1) X .100 [2.54]

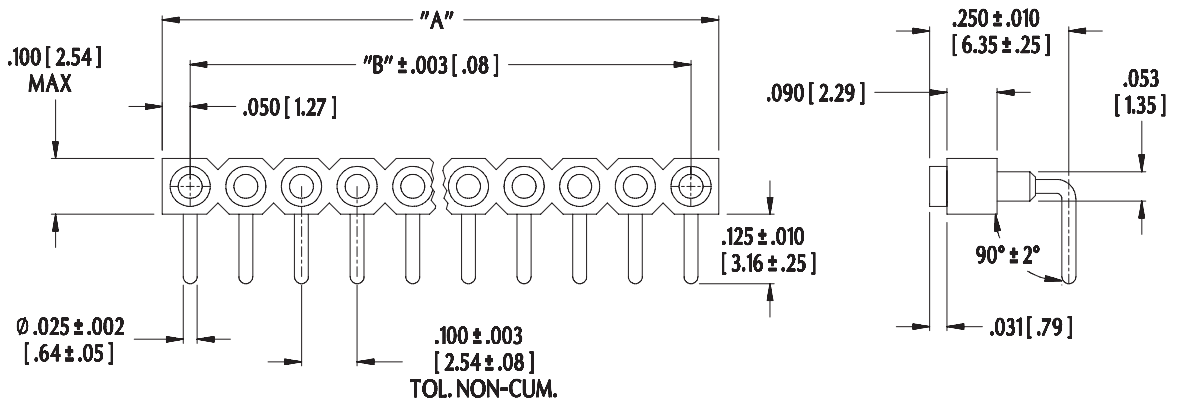

NORTH AMERICA
Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891



EUROPE
TEL: +44 870 240 0249
FAX: +44 871 919 6033
europe@arieselec.com

13009
REV.D