

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	1
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	4A
Termination type	Female solder
IP rating	61
Cable Ø	0.00 - 0.00 mm
Matching parts	FFB.4A.675.CTCC13
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	PCA*: Free receptacle with cable collet
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	
Weight	262.44 g

### Performance

Configuration	4A.675 : 1 Triax (75 Ohm)
Insulator	T: PTFE
Rated Current	6 Amps

### Specifications

Vtest: 1200 V (AC), 1690 V (DC)
Impedance: 75 Ohm

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

## Others

Humidity (max): <=95% [at 60 deg C / 140 F]

Salt Spray Corrosion: >144 hr


Climatical Category: 55/175/21

IP Rating: 61

---

## DRAWINGS

### Draws

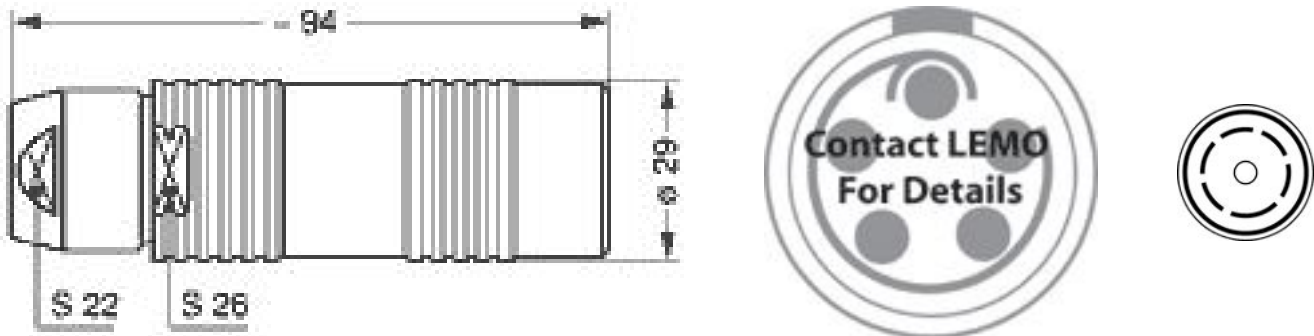

### Dimensions

	A	L	S1	S2
mm.	29	94	26	22
in.	1,14	3,70	1,02	0,87

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*