
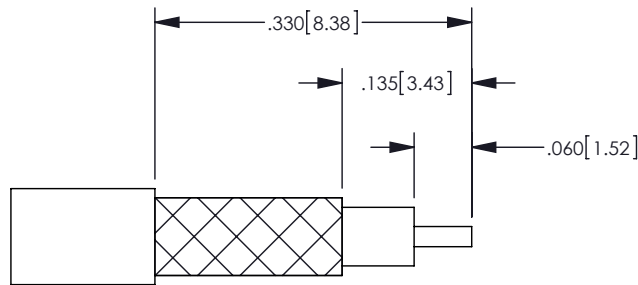


NOTES: UNLESS OTHERWISE SPECIFIED

1. DESIGNED FOR USE WITH RG316 OR EQUIVALENT CABLE.
2. MATERIAL SPECIFICATIONS:  
C RING: COPPER ALLOY.  
ALL OTHER METAL PARTS: BRASS PER ASTM B16.  
INSULATOR: TEFLON PER ASTM D1710.
3. FINISH SPECIFICATIONS:  
BODY: .000015 MIN GOLD PER ASTM B488 OVER .000080 MIN NICKEL PER AMS-QQ-N-290 (RoHS).  
CENTER CONTACT & C RING: .000030 MIN GOLD PER ASTM B488 OVER .000080 MIN NICKEL PER AMS-QQ-N-290 (RoHS).  
FERRULE: .000005 MIN GOLD PER ASTM B488 OVER .000080 MIN NICKEL PER AMS-QQ-N-290 (RoHS).
4. CRIMP FERRULE USE .128 HEX DIE.
5. ELECTRICAL SPECIFICATIONS:  
IMPEDANCE: 50 OHMS.  
FREQUENCY RANGE: DC-6GHz.
6. INTERFACE PER CECC 22340.
7. FOR CABLING SEE CAP 9-17 WITH TRIM DIMENSIONS SHOWN BELOW.
8. CONTACT AND FERRULE SHIPPED LOOSE.

REV	DESCRIPTION	BY DATE	APPD
01	PRELIMINARY DRAWING PER ER33074	DW 06/07/11	Dcam

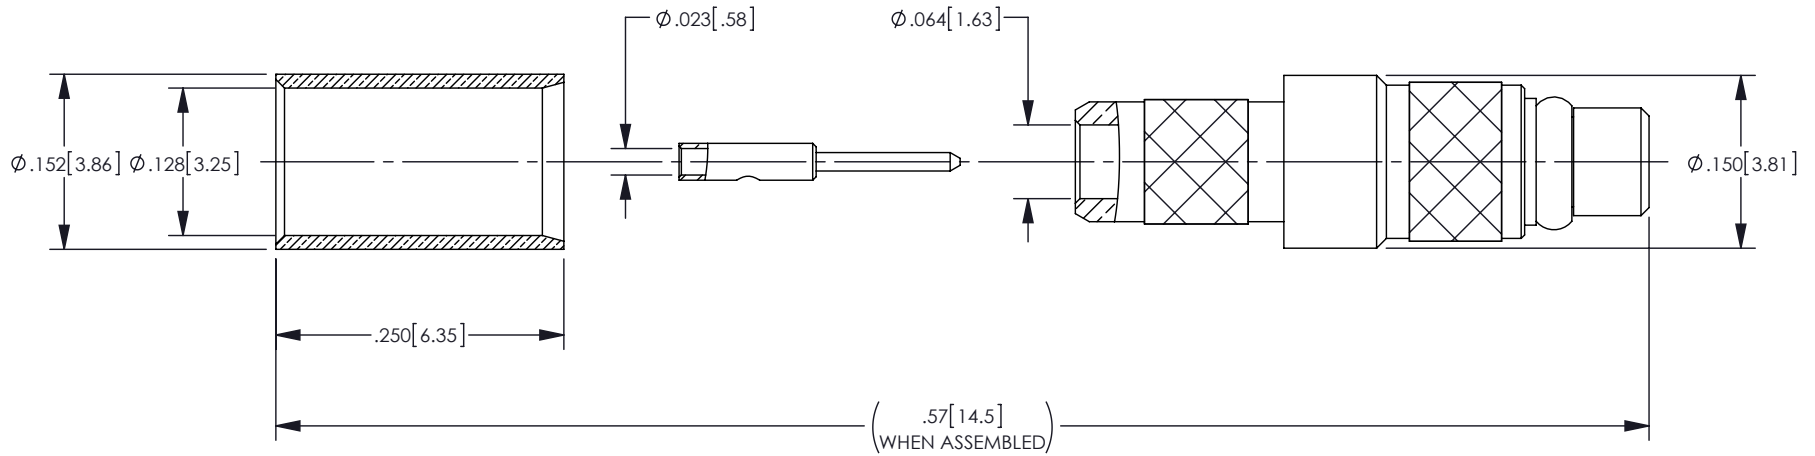

RECOMMENDED CABLE TRIM DIMENSION

CATALOG P/N: 3225-900-B0001H

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .0005 [0.013]		by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER SALES DRAWING		THIRD ANGLE	
DRAWN DW	DATE 05/31/11	APPROVED Dcam	DATE 06/03/11
APPROVED XXX		DATE XX/XX/XX	
APPROVED XXX		DATE XX/XX/XX	
<b>A</b>		SD3225-900-B0001H	SHT OF REV 1 1 01