REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE



RECOMMENDED
CABLE STRIPPING DIM'S

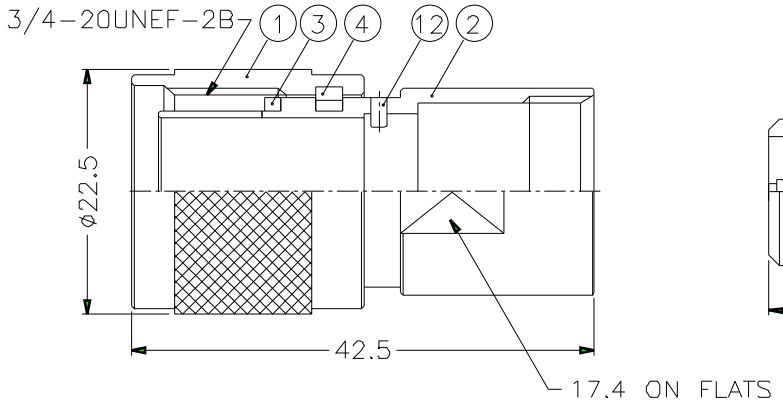

















NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
12	PIN	NOTE 1	NOTE 3	1	TW5620-12-B
11	CONTACT PIN	NOTE 1	NOTE 4	2	TW5620-11-3/11
10	NUT	NOTE 1	NOTE 3	1	TW5620-10-19/88
9	WASHER	NOTE 2	NOTE 3	1	WS-16/9X05
8	GASKET	SILICONE	RED	1	TW5620-8
7	BRAID CLAMP	NOTE 1	NOTE 3	1	TW5620-7-85/72
6	TOP HAT	NOTE 1	NOTE 3	1	TW5620-6-158/64
5	INSULATOR	PBT	WHITE	1	TW5620-5-B
4	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
3	GASKET	SILICONE	RED	1	GS-17/145X15
2	BODY	NOTE 1	NOTE 3	1	TW5620-2
1	SHELL	NOTE 1	NOTE 3	1	TW5620-1

1. CRIMPED CONTACT PIN HEX CRIMP SIZE .078" OR CONTACT PIN TO SOLDER

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 1.5/1 | ISSUE A

PART NO. TWX1141A1-NPB3G-9-95

APPROVED	DATE 10-11-01'
CHECKED	DATE 10-11-01'
DRAWN	DATE 10-11-01'

FILE NO.

Amphenol

TITLE TWINAXIAL CLAMP PLUG (FOR BELDEN 9207)

DRAWING NO. KJ-TWX1141A1-NPB3G-9207-95

ITEM NO.