
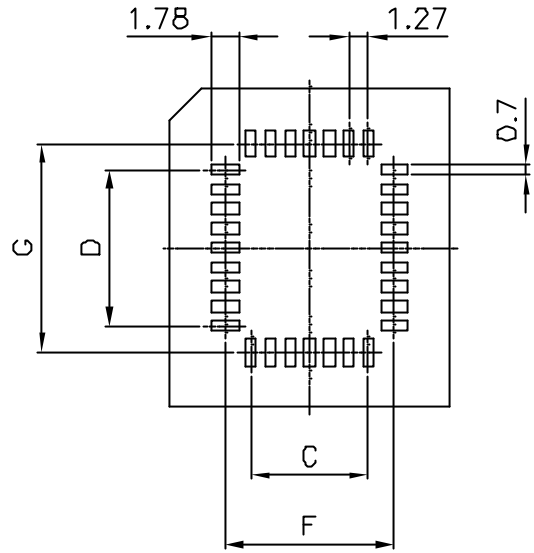


Material:

\* Insulator: PPS, UL 94V-0; Color: Brown

\* Contact: Phosphor Bronze

\* Plating: Tin plated 120?" min. over 30~50?" nickel overall

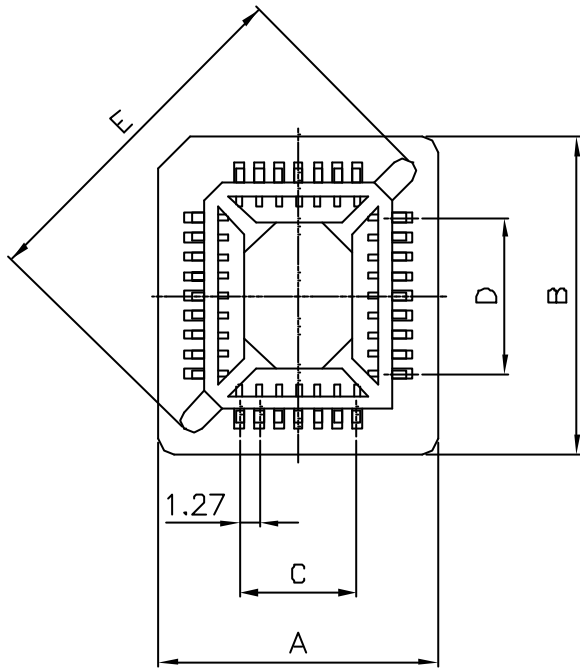

P.C.B. LAYOUT

Circuits	A±0.20	B±0.20	C±0.20	D±0.20	E±0.20	F±0.20	G±0.20
20	15.58	15.58	5.08	5.08	17.21	8.48	8.48
28	18.12	18.12	7.62	7.62	20.80	11.02	11.02
32	18.12	20.66	7.62	10.16	22.70	11.02	13.56
44	23.20	23.20	12.70	12.70	27.98	16.10	16.10
52	25.74	25.74	15.24	15.24	31.57	18.64	18.64
68	30.82	30.82	20.32	20.32	38.76	23.72	23.72
84	35.90	35.90	25.40	25.40	45.94	28.80	28.80

				LECO CORPORATION		APPROVED BY:		PART NO.:				
				GENERAL TOLERANCE		CHECKED BY:		TITLE:				
C	E980425			X. ±	X' ± 2'	DRAW BY:		DRAWING NO.:				
B	E950268			.X ± 0.30	.X' ±	Angela 12/01/'98		811101S				
A	DWG REL.			.XX ± 0.20	.XX' ±							
REV.	ECO. NO.	CHG	APPD.	.XXX ± 0.10	.XXX' ±			UNITS	SCALE	SIZE	SHEET	REV.
								mm	2/1	A4	1/1	C
								Inch				