

#### DESCRIPTION

The HYM532810 is a 8M x 32-bit Fast page mode CMOS DRAM module consisting of sixteen HY5117400 in 24/28 pin SOJ on a 72 pin glass-epoxy printed circuit board. 0.22 $\mu$ F decoupling capacitor is mounted for each DRAM. The HYM532810M/LM are Tin-Lead plated and HYM532810MG/LMG are Gold plated socket type Single In-line memory Modules suitable for easy interchange and addition of 32M byte memory.

#### FEATURES

- Low power dissipation
  - Max. battery back-up 44.0mW (L-part)
  - Max. CMOS standby 35.2mW (L-part)
  - 88.0mW
  - Max. TTL standby 176.0mW
  - Max. operating

Speed	Power
60	5.81W
70	5.15W
80	4.49W

- Single power supply of 5V $\pm$ 10%
- TTL compatible inputs and outputs
- Fast access time


Speed	tRAC	tCAC	tPC
60	60ns	15ns	40ns
70	70ns	20ns	45ns
80	80ns	20ns	50ns

- Fast page mode operation
- CAS-before-RAS, RAS-only, Hidden refresh
- 2048 refresh cycles / 256ms (L-part)
- 2048 refresh cycles / 32ms

#### PIN DESCRIPTION

RAS0-RAS3	Row Address Strobe
CAS0-CAS3	Column Address Strobe
WE	Write Enable
A0-A10	Address Input
DQ0-DQ31	Data Input/Output
PD1-PD4	Presence Detect
Vcc	Power (+5V)
Vss	Ground


#### PIN CONNECTION

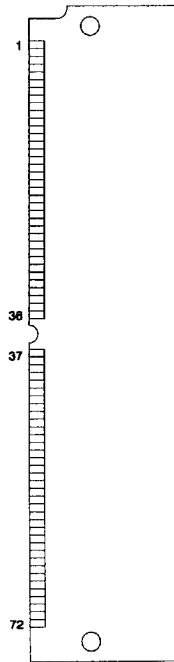

**PIN NAME**

#	NAME	#	NAME
1	Vss	37	NC
2	DQ0	38	NC
3	DQ18	39	Vss
4	DQ1	40	CAS0
5	DQ19	41	CAS2
6	DQ2	42	CAS3
7	DQ20	43	CAS1
8	DQ3	44	RAS0
9	DQ21	45	RAS1
10	Vcc	46	NC
11	NC	47	WE
12	A0	48	NC
13	A1	49	DQ9
14	A2	50	DQ27
15	A3	51	DQ10
16	A4	52	DQ28
17	A5	53	DQ11
18	A6	54	DQ29
19	A10	55	DQ12
20	DQ4	56	DQ30
21	DQ22	57	DQ13
22	DQ5	58	DQ31
23	DQ23	59	Vcc
24	DQ6	60	DQ32
25	DQ24	61	DQ14
26	DQ7	62	DQ33
27	DQ25	63	DQ15
28	A7	64	DQ34
29	NC	65	DQ16
30	Vcc	66	NC
31	A8	67	PD1
32	A9	68	PD2
33	RAS3	69	PD3
34	RAS2	70	PD4
35	NC	71	NC
36	NC	72	Vss

**BLOCK DIAGRAM**

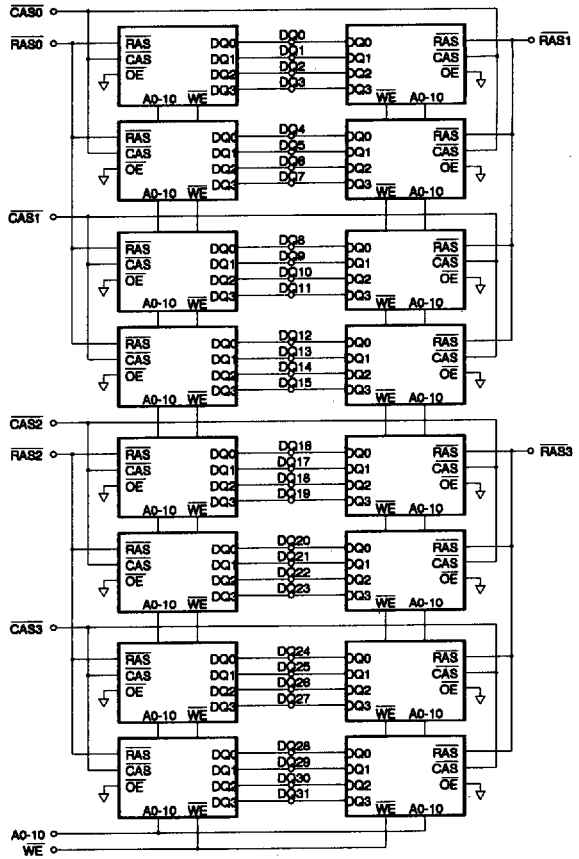

**PRESENCE DETECT PIN**

PIN	-60	-70	-80
PD1	NC	NC	NC
PD2	Vss	Vss	Vss
PD3	NC	Vss	NC
PD4	NC	NC	Vss

**ABSOLUTE MAXIMUM RATINGS**

SYMBOL	PARAMETER	RATING	UNIT
TA	Ambient Temperature	0 to 70	°C
TSTG	Storage Temperature	-55 to 150	°C
VIN, VOUT	Voltage on Any Pin Relative to VSS	-1.0 to 7.0	V
VCC	Voltage on VCC Relative to VSS	-1.0 to 7.0	V
I <sub>OS</sub>	Short Circuit Output Current	50	mA
P <sub>D</sub>	Power Dissipation	11.2	W

NOTE : Operation at or above Absolute Maximum Ratings can adversely affect device reliability.

**RECOMMENDED DC OPERATING CONDITIONS**

(TA=0°C to 70°C)

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNIT
VCC	Supply Voltage	4.5	5.0	5.5	V
V <sub>IH</sub>	Input High Voltage	2.4	-	VCC + 1.0	V
V <sub>IL</sub>	Input Low Voltage	-1.0	-	0.8	V

NOTE : All voltages are referenced to VSS.

**DC CHARACTERISTICS**

(TA = 0°C to 70°C, VCC = 5V ± 10%, VSS = 0V, unless otherwise noted.)

SYMBOL	PARAMETER	TEST CONDITIONS	SPEED/ POWER	MIN.	MAX.	UNIT	NOTE
I <sub>LI</sub>	Input Leakage Current (Any Input Pin)	VSS ≤ VIN ≤ VCC + 1.0, All other pins not under test = VSS		-160	160	μA	
I <sub>LO</sub>	Output Leakage Current (High Impedance State)	VSS ≤ VOUT ≤ VCC, RAS & CAS at VIH		-20	20	μA	
ICC1	VCC Supply Current, Operating	tRC = tRC (min.)	60	-	1056	mA	1,2,3
			70	-	936		
			80	-	816		
ICC2	VCC Supply Current, TTL Standby	RAS & CAS at VIH, other inputs ≥ VSS		-	32	mA	
ICC3	VCC Supply Current, RAS-only refresh	tRC = tRC (min.)	60	-	1056	mA	1,3
			70	-	936		
			80	-	816		
ICC4	VCC Supply Current, Fast Page mode	tPC = tPC (min.)	60	-	576	mA	1,2,3
			70	-	536		
			80	-	496		
ICC5	VCC Supply Current, CMOS Standby	RAS & CAS ≥ VCC - 0.2V	L-part	-	16 6.4	mA	5
ICC6	VCC Supply Current, CAS-before-RAS refresh	tRC = tRC (min.)	60	-	1056	mA	1,3
			70	-	936		
			80	-	816		
ICC7	VCC Supply Current, Battery Back Up (L-part only)	tRC = 125μs, CAS = CBR cycling or 0.2V WE = VCC - 0.2V A0-A10 = VCC - 0.2V or 0.2V DQ0-DQ35 = VCC - 0.2V, 0.2V, or open	tRAS ≤ 300ns	-	4.8	mA	1,4,5
			tRAS ≤ 1μs	-	8		
VOL	Output Low Voltage	IOL = 4.2mA		-	0.4	V	
VOH	Output High Voltage	IOH = -5mA		2.4	-	V	

**NOTE :**

1. ICC1, ICC3, ICC4, ICC6 and ICC7 depend on cycle rate.
2. ICC1 and ICC4 depend on output loading. Specified values are obtained with the output open.
3. It depends on user whether column address is changed or not at least once while RAS = VIL and CAS = VIH.
4. Only tRAS(max.) = 1μs is applied to refresh of battery backup but tRAS(max.) = 10μs is applied to normal functional operation.
5. ICC5(max.) = 4.0mA and ICC7 are applied to L-part only (HYM532810LM and HYM532810LMG).

**AC CHARACTERISTICS**

(TA = 0°C to 70°C, VCC = 5V ± 10%, VSS = 0V, unless otherwise noted.) NOTE : 1, 2, 3

#	SYMBOL	PARAMETER	HYM532810						UNIT	NOTE
			-60		-70		-80			
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
1	tRC	Random Read or Write Cycle Time	110	-	130	-	150	-	ns	
2	tRPC	RAS to CAS Precharge Time	5	-	5	-	5	-	ns	
3	tPC	Fast Page Mode Cycle Time	40	-	45	-	50	-	ns	
4	tRHCP	RAS Hold Time from CAS Precharge	35	-	40	-	45	-	ns	
5	tRAC	Access Time from RAS	-	60	-	70	-	80	ns	4,9,10
6	tCAC	Access Time from CAS	-	15	-	18	-	20	ns	4,9
7	tAA	Access Time from Column Address	-	30	-	35	-	40	ns	4,10
8	tCPA	Access Time from CAS Precharge	-	35	-	40	-	45	ns	4
9	tCLZ	CAS to Output Low Impedance	0	-	0	-	0	-	ns	4
10	tOFF	Output Buffer Turn-off Delay	0	15	0	18	0	20	ns	5
11	tT	Transition Time (Rise and Fall)	3	50	3	50	3	50	ns	
12	tRP	RAS Precharge Time	40	-	50	-	60	-	ns	
13	tRAS	RAS Pulse Width	60	10K	70	10K	80	10K	ns	
14	tRASP	RAS Pulse Width (Fast Page Mode)	60	400K	70	400K	80	400K	ns	
15	tRSH	RAS Hold Time	15	-	18	-	20	-	ns	
16	tCSH	CAS Hold Time	60	-	70	-	80	-	ns	
17	tCAS	CAS Pulse Width	15	10K	18	10K	20	10K	ns	
18	tRCD	RAS to CAS Delay	20	45	20	52	20	60	ns	9
19	tRAD	RAS to Column Address Delay Time	15	30	15	35	15	40	ns	10
20	tCRP	CAS to RAS Precharge Time	5	-	5	-	5	-	ns	
21	tCP	CAS Precharge Time	10	-	10	-	10	-	ns	
22	tASR	Row Address Set-up Time	0	-	0	-	0	-	ns	
23	tRAH	Row Address Hold Time	10	-	10	-	10	-	ns	
24	tASC	Column Address Set-up Time	0	-	0	-	0	-	ns	
25	tCAH	Column Address Hold Time	10	-	15	-	15	-	ns	
26	tAR	Column Address Hold Time from RAS	50	-	55	-	60	-	ns	
27	tRAL	Column Address to RAS Lead Time	30	-	35	-	40	-	ns	
28	tRCS	Read Command Set-up Time	0	-	0	-	0	-	ns	
29	tRCH	Read Command Hold Time Referenced to CAS	0	-	0	-	0	-	ns	6
30	tRRH	Read Command Hold Time Referenced to RAS	0	-	0	-	0	-	ns	6
31	tWCH	Write Command Hold Time	10	-	15	-	15	-	ns	
32	tWCR	Write Command Hold Time from RAS	45	-	55	-	60	-	ns	
33	tWP	Write Command Pulse Width	10	-	15	-	15	-	ns	
34	tRWL	Write Command to RAS Lead Time	15	-	18	-	20	-	ns	
35	tCWL	Write Command to CAS Lead Time	15	-	18	-	20	-	ns	
36	tDS	Data-In Set-up Time	0	-	0	-	0	-	ns	7
37	tDH	Data-In Hold Time	10	-	15	-	15	-	ns	7
38	tDHR	Data-In Hold Time Referenced to RAS	50	-	55	-	60	-	ns	
39	tREF	Refresh Period (2048 cycles)	-	32	-	32	-	32	ms	11
		L-part	-	256	-	256	-	256		
40	tWCS	Write Command Set-up Time	0	-	0	-	0	-	ns	8

**AC CHARACTERISTICS**

(continued)

#	SYMBOL	PARAMETER	HYM532810						UNIT	NOTE
			-60		-70		-80			
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
41	tCSR	CAS Set-up Time (CBR Cycle)	10	-	10	-	10	-	ns	
42	tCHR	CAS Hold Time (CBR Cycle)	10	-	15	-	15	-	ns	
43	tCPT	CAS Precharge Time (CBR Counter Test)	20	-	25	-	25	-	ns	
44	tWRP	WE to RAS Precharge Time (CBR cycle)	10	-	10	-	10	-	ns	
45	tWRH	WE to RAS Hold Time (CBR cycle)	10	-	10	-	10	-	ns	

**NOTE :**

1. An initial pause of 200 $\mu$ s is required after power-up followed by 8 RAS cycles before proper device operation is achieved. In case of using internal refresh counter, a minimum of 8 CAS-before-RAS initialization cycles instead of 8 RAS-only refresh cycles are required. The device should carefully initialized to be prevented from being entered into multi bit test mode.
2. VIH(min.) and VIL(max.) are reference levels for measuring timing of input signals. Transition time is measured between VIH and VIL and assumed to be 5ns for all inputs.
3. Refer to the HY5117400 and HY514100A data sheet for detailed information.
4. Measured with a load equivalent to 2 TTL loads and 100pF.
5. tOFF(max.) defines the time at which the output achieves the open circuit condition and is not referenced to output voltage levels.
6. Either tRCH or tRRH must be satisfied for a read cycle.
7. These parameters are referenced to CAS leading edge in early write cycles.
8. twCS is not a restrictive operating parameter. It is included in the data sheet as electrical characteristics only. If twCS  $\geq$  twCS(min.), the cycle is an early write cycle and data out pin will remain open circuit (high impedance) through the entire cycle.
9. Operation within the tRCD(max.) limit insures that tRAC(max.) can be met. tRCD(max.) is specified as a reference point only. If tRCD is greater than the specified tRCD(max.) limit, then access time is controlled by tCAC.
10. Operation within the tRAD(max.) limit insures that tRAC(max.) can be met. tRAD(max.) is specified as a reference point only. If tRAD is greater than the specified tRAD(max.) limit, then access time is controlled by tAA.
11. tREF(max.) = 256ms is applied to L-part only (HYM532810LM and HYM532810LMG).


**CAPACITANCE**

(TA = 25°C, VCC = 5V  $\pm$  10%, VSS = 0V, f = 1MHz, unless otherwise noted.)


SYMBOL	PARAMETER	TYP.	MAX.	UNIT
CIN1	Input Capacitance (A0-A10)	-	110	pF
CIN2	Input Capacitance (WE)	-	120	pF
CIN3	Input Capacitance (RAS0-RAS3)	-	35	pF
CIN4	Input Capacitance (CAS0-CAS3)	-	35	pF
CDQ	Data Input/Output Capacitance (DQ0-31)	-	25	pF

TIMING DIAGRAM

READ CYCLE

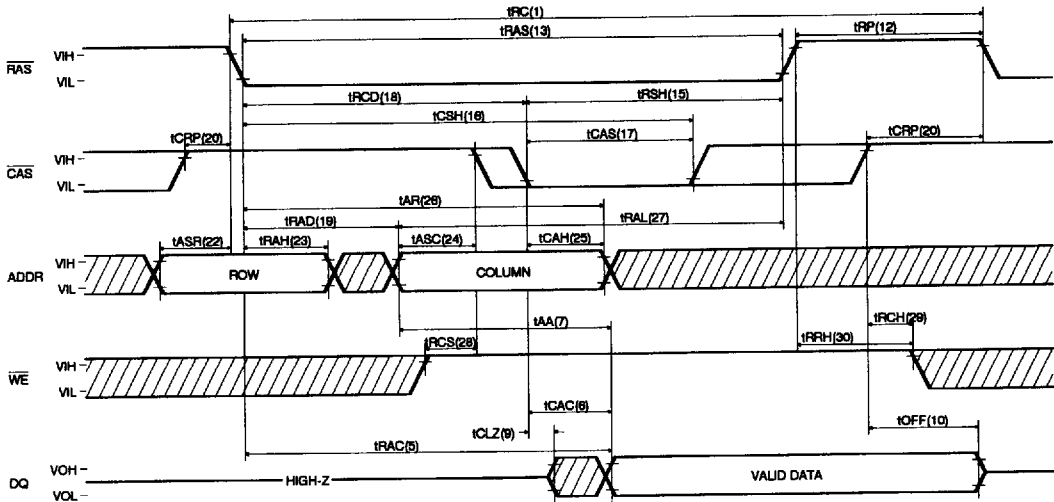


EARLY WRITE CYCLE

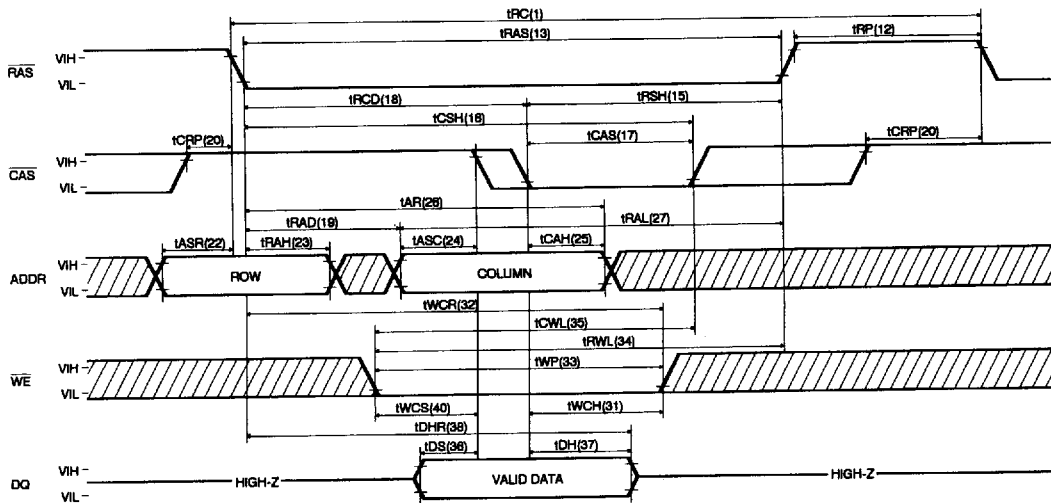





**RAS-ONLY REFRESH CYCLE**

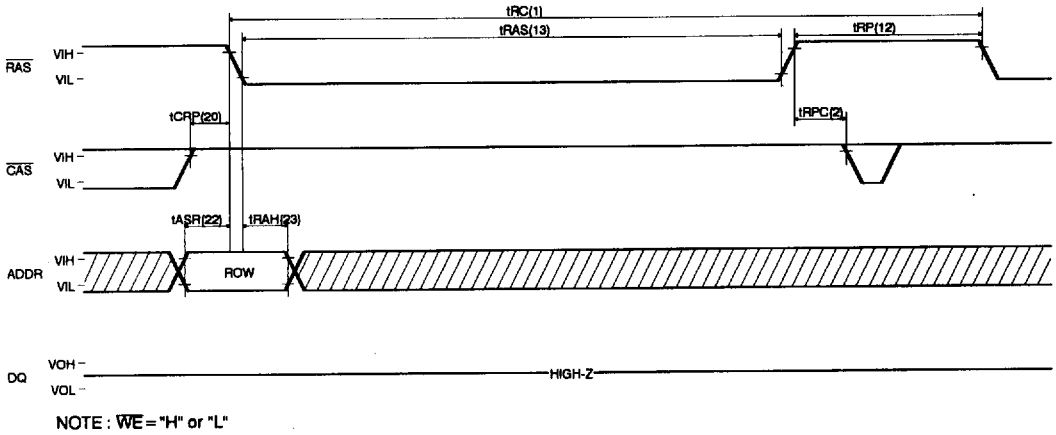


**CAS-BEFORE-RAS REFRESH CYCLE**

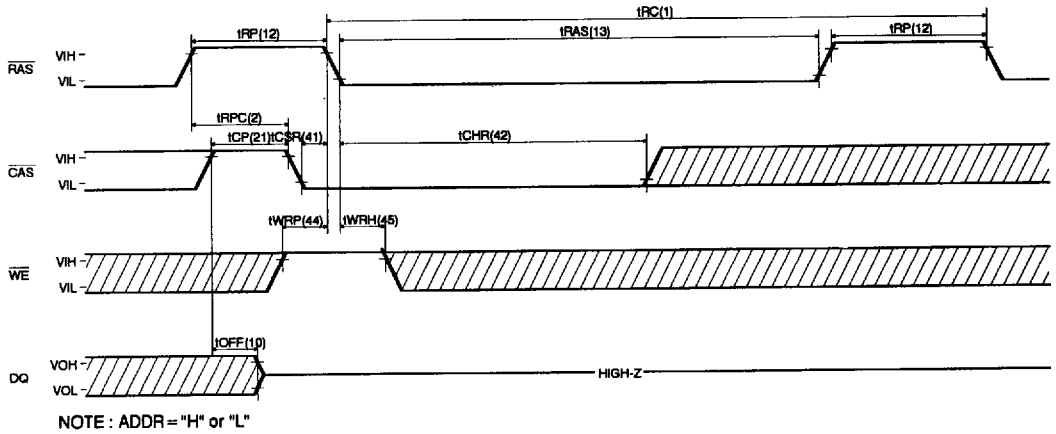


**HIDDEN REFRESH CYCLE (READ)**

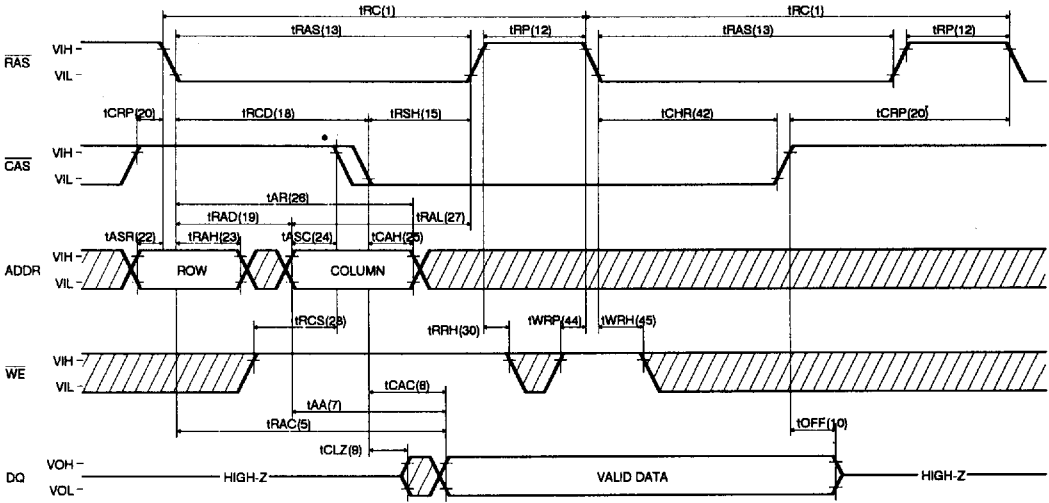

**HIDDEN REFRESH CYCLE (WRITE)**

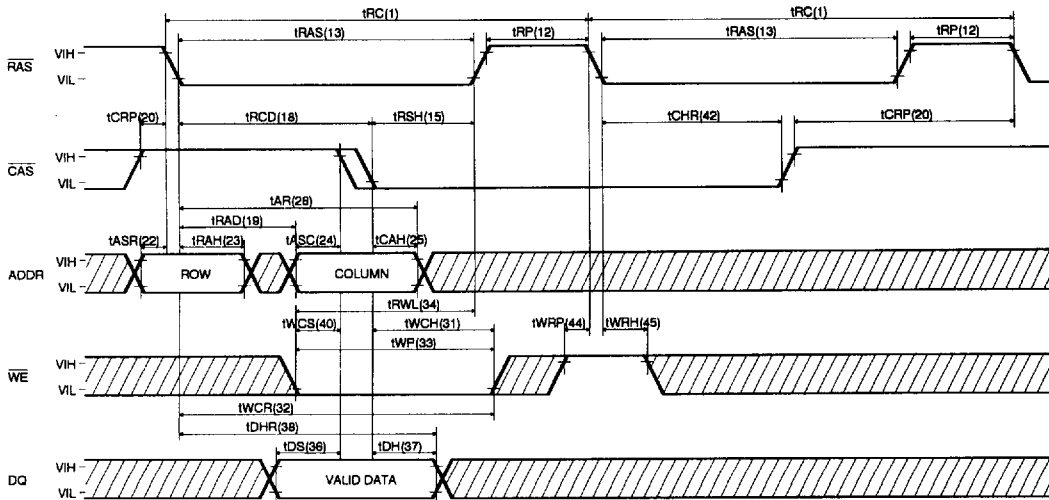


CAS-BEFORE-RAS REFRESH COUNTER TEST CYCLE

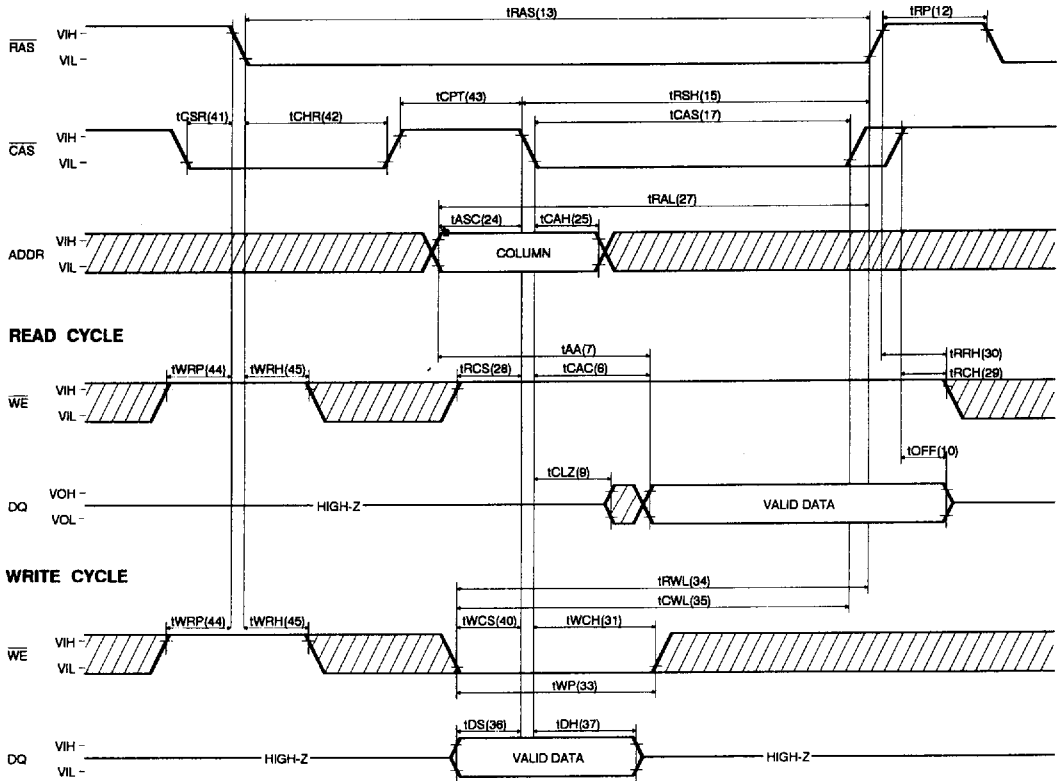

**PACKAGE INFORMATION**

**72 pin Single In-line Memory (M ; Tin-Lead plated, MG ; Gold plated)  
HYM532810/L (SOJ Mounted)**

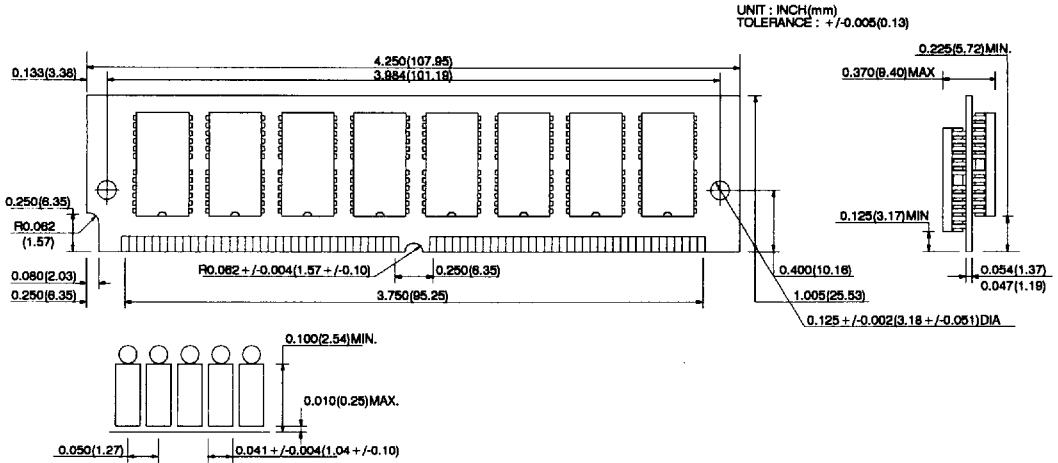

**ORDERING INFORMATION**

PART NUMBER	SPEED	POWER	PACKAGE	PLATING
HYM532810M	60/70/80		SIMM	Tin-Lead
HYM532810LM	60/70/80	L-part	SIMM	Tin-Lead
HYM532810MG	60/70/80		SIMM	Gold
HYM532810LMG	60/70/80	L-part	SIMM	Gold