



## GENERAL OCXO SPECIFICATION : OCXO-100



<b>Frequencies Available</b>	:	10.000 000 to 100.000 000 MHz.			
<b>Xtal Cut</b>	:	AT-Cut	SC-Cut ( option )		
<b>Frequency Stability</b>					
vs Temperature ( Maximum ) <sup>*1</sup>					
- 20.0 to + 70.0 °C	:	± 100.0 ppb.	± 20.0 ppb.		
- 40.0 to + 85.0 °C	:	± 200.0 ppb.	± 30.0 ppb.		
vs Supply Voltage ( Maximum for a 5.0 % change )	:	± 10.0 ppb.	± 5.0 ppb.		
vs Load ( Maximum for a 5.0 % change )	:	± 10.0 ppb.	± 5.0 ppb.		
vs Ageing					
Per day ( after 72 hours operation ) ( Maximum )	:	± 2.0 ppb.	± 1.0 ppb.		
Per year ( after 72 hours operation ) ( Maximum )	:	± 500.0 ppb.	± 100.0 ppb.		
Per year after first ( Maximum )	:	± 250.0 ppb.	± 50.0 ppb.		
Calibration ( @ + 25.0 °C )					
Initial ( at shipment ) ( Maximum )	:	± 300.0 ppb.	± 100.0 ppb.		
3 Minutes after switch on ( Maximum )	:	± 100.0 ppb.	± 10.0 ppb.		
<b>Frequency Adjustment</b> ( over voltage control range applied to Pin 3 ) <sup>*2</sup>					
Frequency Range ( Electrical )	:	± 6.0 to ± 12.0 ppm.	± 0.75 to ± 2.0 ppm.		
<b>Voltage Control Range</b>					
With supply voltage @ 3.3 V.	:	+ 0.0 to + 2.8 V.			
With supply voltage @ 5.0 V.	:	+ 0.0 to + 4.0 V.			
With supply voltage @ 12.0 V.	:	+ 0.0 to + 5.0 V.			
<b>Reference Voltage Output ( ± 2.0 % )</b>					
With supply voltage @ 3.3 V.	:	+ 2.8 V.			
With supply voltage @ 5.0 V.	:	+ 4.0 V.			
With supply voltage @ 12.0 V.	:	+ 5.0 V.			
Slope		Positive, increasing control voltage increases output frequency.			
Linearity		20.0 % Maximum.			
<b>Temperature Range</b>					
Operating	:	- 40 to + 85 °C ( other options available ).			
Storage	:	- 55 to + 125 °C.			
<b>Supply Voltage ( ± 5.0 % )</b>					
<b>Power Consumption ( @ + 25.0 °C ) ( Maximum )</b>					
During warm up ( first 3 minutes after switch on )	:	3.0 W.			
Steady State	:	1.0 W.			

## PRECISION DEVICES

USA

TEL: +1 608 831 4445

E-MAIL: info@pdixtal.com

ISO 9001, Reg. No. FM 75597

UK

TEL: +44 (0)1223 834 444

E-MAIL: sales@pdixtal.co.uk

ISO 9001, Reg. No. FM 01995

Revision 001 Created on 23/09/2009 by MS

Revision 002 Updated on 09/10/2009 by MS Package drawing moved to page 3 and enlarged.



## GENERAL OCXO SPECIFICATION : OCXO-100



AT-Cut

SC-Cut

**Output Characteristics**

Waveform	:	Squarewave.
Output	:	HCMOS.
Load	:	15 pF.
Mark Space Ratio ( @ 1/2 V <sub>CC</sub> )	:	45:55.
Logic Levels		
High ( Minimum )		
With supply voltage @ 3.3 V.	:	3.0 V.
With supply voltage @ 5.0 V.	:	4.5 V.
With supply voltage @ 12.0 V.	:	4.5 V.
Low ( Maximum )		
With supply voltage @ 3.3 V.	:	0.3 V.
With supply voltage @ 5.0 V.	:	0.5 V.
With supply voltage @ 12.0 V.	:	0.5 V.
( Option )		
Waveform	:	Sinewave.
Load	:	50 Ω.
Output Power ( @ 50 Ω Load )		
Minimum	:	+ 3.0 dBm.
Typical	:	+ 5.5 dBm.
Maximum	:	+ 8.0 dBm.
Harmonics ( @ 50 Ω Load ) ( Maximum )	:	- 30.0 dBc.

**Package Style**

:

**Marking**

Line 1	:	PDI
Line 2	:	Frequency
Line 3	:	Spec. code

**Phase Noise ( @ 10.0 MHz ) ( Maximum )**

@ 1.0 Hz	:	- 75 dBc / Hz.	- 80 dBc / Hz.
@ 10.0 Hz	:	- 100 dBc / Hz.	- 120 dBc / Hz.
@ 100.0 Hz	:	- 130 dBc / Hz.	- 140 dBc / Hz.
@ 1.0 kHz	:	- 140 dBc / Hz.	- 145 dBc / Hz.
@ 10.0 kHz	:	- 150 dBc / Hz.	- 150 dBc / Hz.

**Notes**

- \*1 Other Temperature and Stability combinations available.
- \*2 Fixed option available, no adjust.

Terminals to be SnAgCu.

All product supplied in anti-static packaging.

All product is supplied RoHS compliant.

## PRECISION DEVICES

USA

TEL: +1 608 831 4445

E-MAIL: [info@pdixtal.com](mailto:info@pdixtal.com)

ISO 9001, Reg. No. FM 75597

UK

TEL: +44 (0)1223 834 444

E-MAIL: [sales@pdixtal.co.uk](mailto:sales@pdixtal.co.uk)


ISO 9001, Reg. No. FM 01995



## GENERAL OCXO SPECIFICATION : OCXO-100



Package Drawing

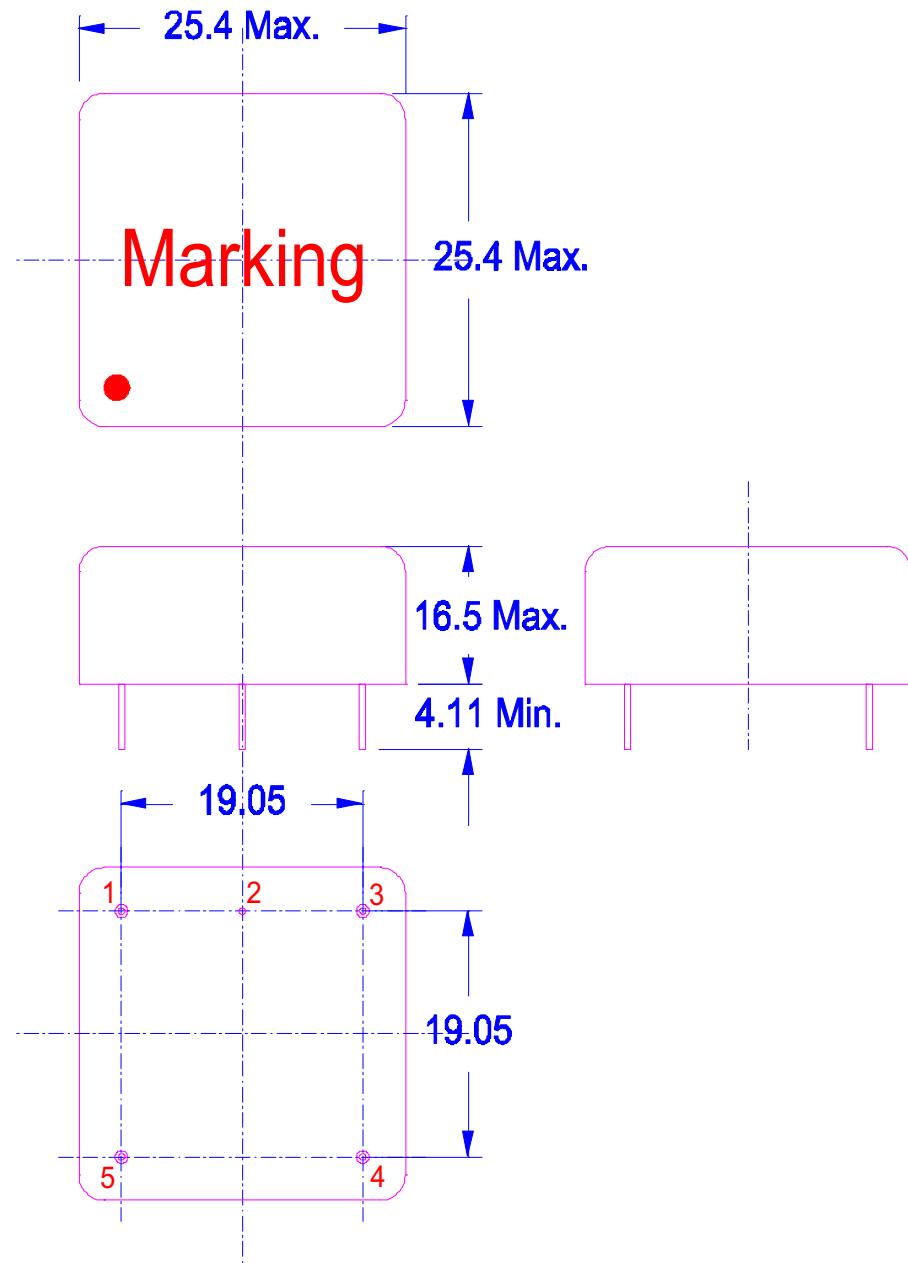

**PRECISION  
DEVICES**

USA  
TEL: +1 608 831 4445  
E-MAIL: [info@pdixtal.com](mailto:info@pdixtal.com)  
ISO 9001, Reg. No. FM 75597

UK  
TEL: +44 (0)1223 834 444  
E-MAIL: [sales@pdixtal.co.uk](mailto:sales@pdixtal.co.uk)  
ISO 9001, Reg. No. FM 01995

### Pin Connections

- 1 Output
- 2 Ground / Case
- 3 Voltage Control
- 4 Reference Voltage Output
- 5 Supply Voltage


All Dimensions and Tolerances are in mm



## GENERAL OCXO SPECIFICATION : OCXO-100



Reflow Solder Profile

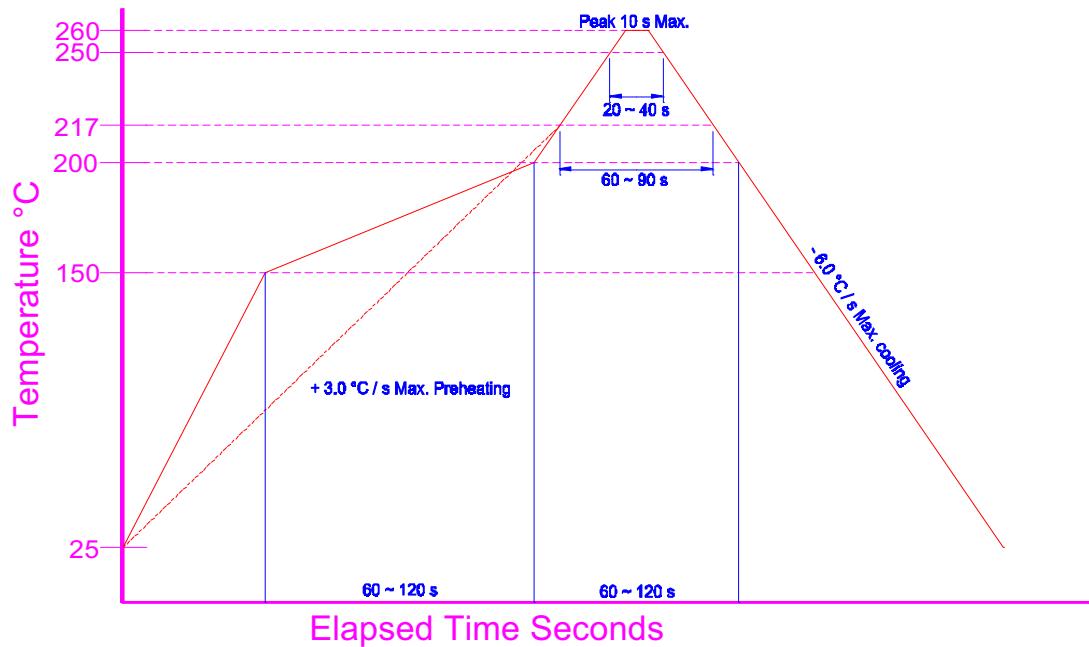

### PRECISION DEVICES

USA

TEL: +1 608 831 4445

E-MAIL: [info@pdixtal.com](mailto:info@pdixtal.com)

ISO 9001, Reg. No. FM 75597

UK

TEL: +44 (0)1223 834 444

E-MAIL: [sales@pdixtal.co.uk](mailto:sales@pdixtal.co.uk)

ISO 9001, Reg. No. FM 01995