



TSV Series

6.0×6.0 Side Push Tact Switch

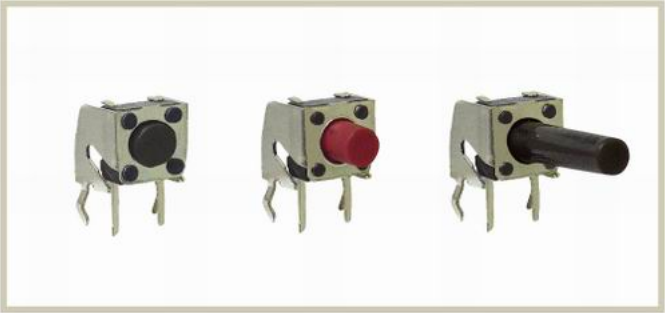

How to order

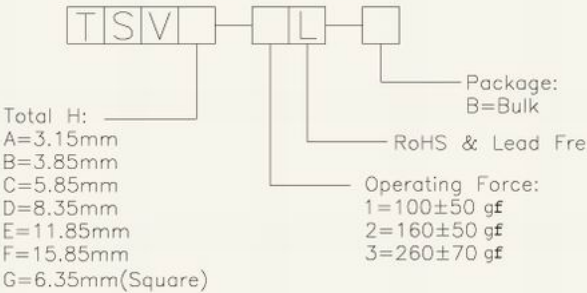

Features

- Snap-in type, which can be directly mounted on PC board.
- Some of output terminals can be also used as jumper leads, thus making circuit design easy.
- Available with anti-ESD ground terminal.
- Standard knobs are available.

Applications



- Operating switches in all types of electronic equipment such as audio devices, office devices, communication devices, measuring instruments, TVs, video recorders, automotive sets, etc.

Specification

Items		Standard
Operating temperature range		-20°C to +70°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	50,000 Cycles, 100,000 Cycles
Mechanical performance	Operating force	1:100 ± 50gf, 2:160 ± 50gf, 3:260 ± 70gf
	Travel	0.25 ± 0.1mm

Diagram

	TSVA~F	TSV-G
Dimensions		
Circuit		

34	Diagram	Circuit Diagram  PCB Board	Circuit Diagram  PCB Board
	Pad Layout		

❖ Please follow drawing of Approved Sheet that catalog drawing only for reference.

[[Close window](#)]