DRAWING No.: M701-720442	IF IN DOUBT – ASK	©	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm

OBSOLETE

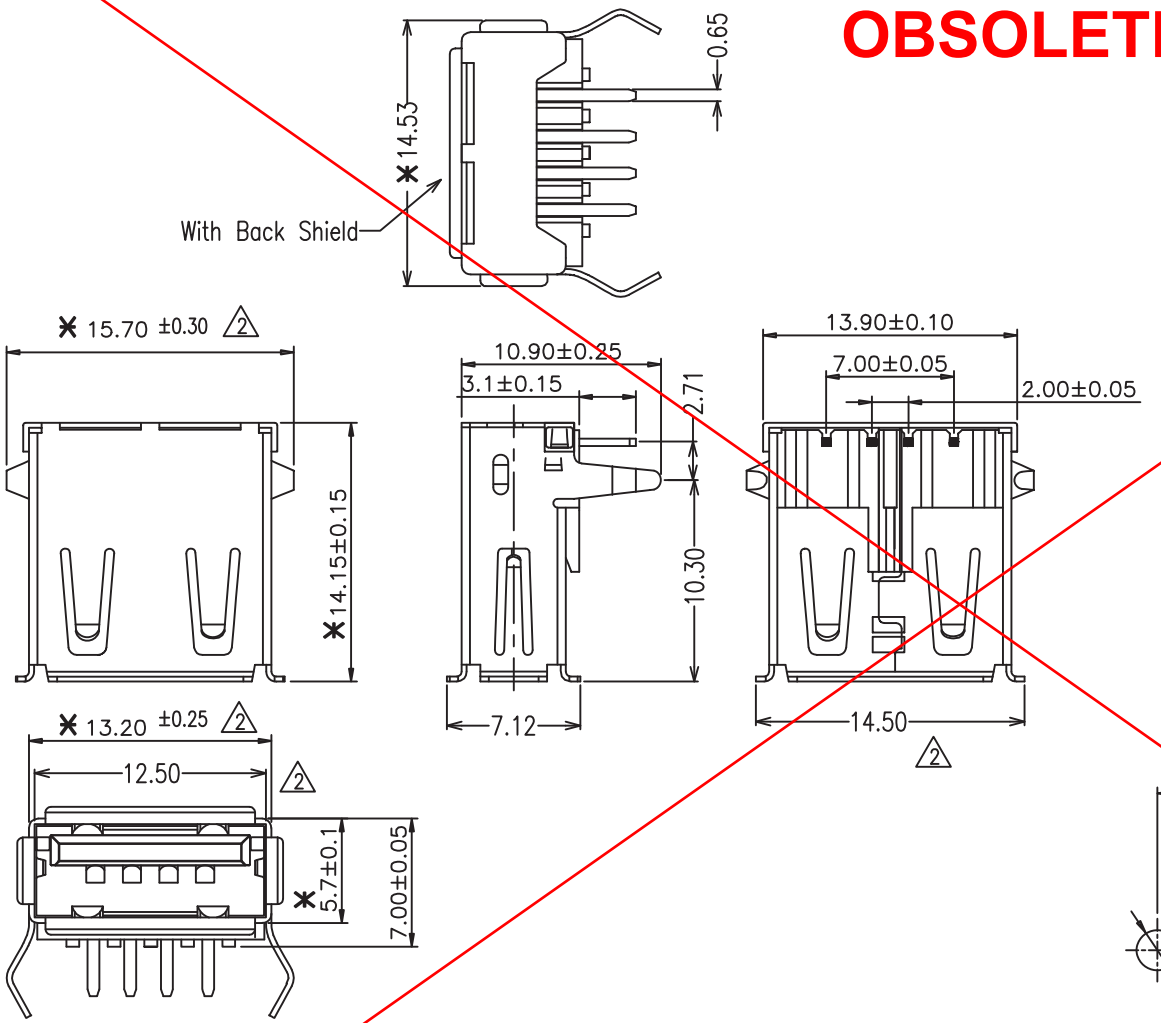

SPECIFICATIONS:

MATERIAL:–
- MOULDING: PBT+30%GF, UL94V–0, WHITE △3
- SHELL: BRASS, Ni PLATED
- CONTACT: BRASS, GOLD AND TIN OVER Ni

ELECTRICAL:–
- CURRENT RATING: 1.5 AMP
- WORKING VOLTAGE: 30V AC/DC
- WITHSTANDING VOLTAGE: 500V AC/MINUTE
- CONTACT RESISTANCE: 30 mΩ MAX.
- INSULATION RESISTANCE: 1000 MΩ MIN.

ENVIRONMENTAL:–
- TEMPERATURE RANGE: –55°C ~ +85°C
- MAX. PROCESSING TEMP: 240°C FOR 5 SECONDS

NOTES: ALL DIMENSIONS AND NOTES MARKED ✱ ARE CRITICAL AND MUST BE CHECKED IN ACCORDANCE WITH QUALITY DOC. QI–02A

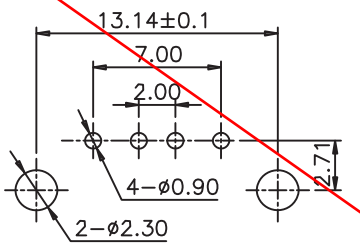

RECOMMENDED PCB LAYOUT

△2

NAME	ISS.	DATE	C/NOTE
Leo	4	01.07.11	A359
Allan	3	12.10.10	A329
Allan	2	18.03.10	A271
Allan	1	21.01.10	–

APPROVED: T.L

CHECKED: Ben

DRAWN: Leo

CUSTOMER REF.:

ASSEMBLY DRG:

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±0.50mm
X.X = ±0.38mm
X.XX = ±0.25mm
X.XXX = ±0.13mm
ANGLES = ±5°
UNLESS STATED

MATERIAL: SEE NOTES

FINISH: SEE NOTES

S/AREA: mm?

TITLE: USB 4PIN FEMALE R/A TYPE

DRAWING NUMBER: M701-720442

SHT 1 OF 1