

Features

- Operating voltage: 2.4V~12V
- Low power and high noise immunity CMOS technology
- Low standby current
- Minimum transmission word:
 - Four words for \overline{TE} trigger
 - One word for Data trigger
- Built-in oscillator needs only a 5% resistor
- Easily interface with an RF or an infrared transmission medium
- Minimal external components

Applications

- Burglar alarm system
- Smoke and fire alarm system
- Garage door controllers
- Car alarm system
- Security system
- Cordless telephones
- Other remote control systems

General Description

The 3¹² encoders are a series of CMOS LSIs for remote control system applications. They are capable of encoding 12 bits of information which consists of N address bits and 12-N data bits. Each address/data input is externally trinary programmable if bonded out. They are otherwise set floating internally. Various packages of the 3¹² encoders offer flexible combinations

of programmable address/data to meet various applications. The programmable address/data is transmitted together with the header bits via an RF or an infrared transmission medium upon receipt of a trigger signal. A \overline{TE} (HT6010/HT6013) or a DATA (HT6012/HT6014/HT6015) trigger can be selected for further application flexibility.

Selection Table


Function Item	Address No.	Address/ Data No.	Data No.	Oscillator	Trigger	LED Indicator	Package
HT6010	8	4	0	RC oscillator	\overline{TE}	No	18 DIP/20 DIP/ 20 SOP
HT6012	10	0	2	RC oscillator	D10~D11	Yes	18 DIP/20 SOP
HT6013	8	2	0	RC oscillator	\overline{TE}	No	16 DIP/ 16 SOP/NSOP
HT6014	8	0	4	RC oscillator	D8~D11	Yes	18 DIP/20 SOP
HT6015	8	0	2	RC oscillator	D10~D11	Yes	16 DIP/ 16 SOP/NSOP

Note: Address/Data represents addressable pins or data according to the requirements of decoders.

Block Diagram


\overline{TE} trigger

HT6010/6013

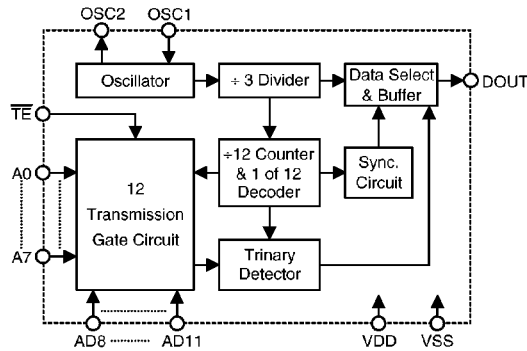

DATA trigger

HT6012/HT6014/HT6015

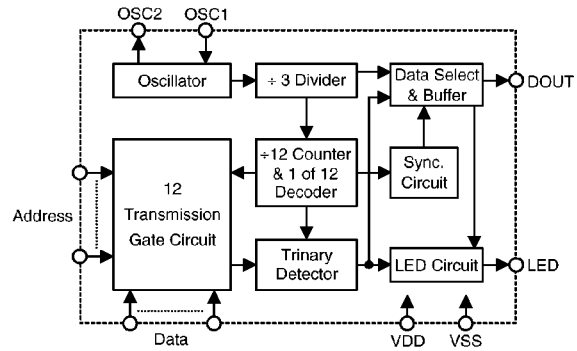

Note: The address/Data pins are available in various combinations (refer to the address/data table).


Pin Description

Pin Name	I/O	Internal Connection	Description
A0~A9	I	TRANSMISSION GATE	Input pins for address A0~A9 setting They can be externally set to VDD or VSS or left open.
AD8~AD11	I	TRANSMISSION GATE	Input pins for address/data (AD8~AD11) setting They can be externally set to VDD or VSS or left open.
D8~D11	I	CMOS IN Pull-High	Input pins for data (D8~D11) setting and transmission enable (active low) They can be externally set to VSS or left open (see Note).
DOUT	O	CMOS OUT	Encoder data serial transmission output
LED	O	NMOS OUT	Transmission enable indicator, active low
\overline{TE}	I	CMOS IN Pull-High	Transmission enable, active low (see Note).
OSC1	I	OSCILLATOR	Oscillator input pin
OSC2	O	OSCILLATOR	Oscillator output pin
VSS	I	—	Negative power supply (GND)
VDD	I	—	Positive power supply

Note: D8~D11 are data input and transmission enable pins of the HT6012/HT6014/HT6015.

\overline{TE} is the transmission enable pin of the HT6010/HT6013.

Approximate internal connection circuits

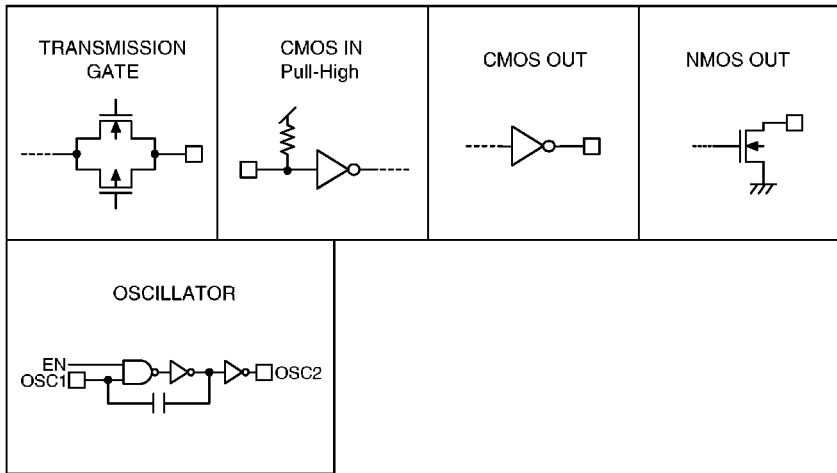

Absolute Maximum Ratings*

Supply Voltage	-0.3V to 13V	Storage Temperature.....	-50°C to 125°C
Input Voltage.....	V _{SS} -0.3 to V _{DD} +0.3V	Operating Temperature.....	-20°C to 75°C

*Note: Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of this device at these or any other conditions above those indicated in the operational sections of this specification is not implied and exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics

(T_a=25°C)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V _{DD}	Conditions				
V _{DD}	Operating Voltage	—	—	2.4	5	12	V
I _{STB}	Standby Current	3V	Oscillator stops	—	0.1	1	μA
		12V		—	2	4	μA
I _{DD}	Operating Current	3V	No load	—	250	500	μA
		12V	F _{OSC} =3kHz	—	600	1200	μA
I _{LED}	LED Sink Current	5V	V _{LED} =0.5V	1.5	3	—	mA
I _{DOUT}	Output Drive Current	5V	V _{OH} =0.9V _{DD} (Source)	-0.6	-1.2	—	mA
		5V	V _{OL} =0.1V _{DD} (Sink)	0.6	1.2	—	mA
V _{IH}	“H” Input Voltage	—	—	0.8V _{DD}	—	V _{DD}	V
V _{IL}	“L” Input Voltage	—	—	0	—	0.2V _{DD}	V


Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V _{DD}	Conditions				
F _{OSC}	Oscillator Frequency	5V	R _{OSC} =1MΩ	—	3	—	kHz
R _{TE}	TE Pull-High Resistance	5V	V _{TE} =0V	—	1.5	3	MΩ
R _{DATA}	D8~D11 Pull-High Resistance	5V	V _{DATA} =0V	—	1.5	3	MΩ

Functional Description

Operation


The 3¹² series of encoders begin with a four (HT6010/HT6013) or a one (HT6012/HT6014/HT6015) word transmission cycle upon receipt of a transmission enable (TE for the HT6010/HT6013 or D8~D11 for the HT6012/HT6014/HT6015, active low). This cycle will repeat itself as long as the transmission enable (TE or D8~D11) is held low. Once the transmission enable returns high the encoder output completes its final cycle and then stops as shown below.

Information word

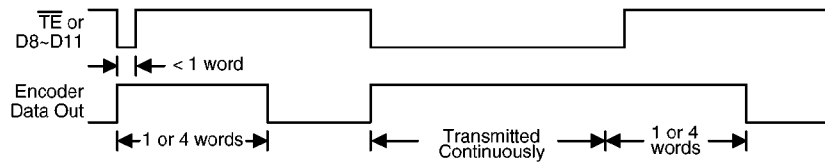

Transmission timing


An information word is composed of 4 periods as shown:

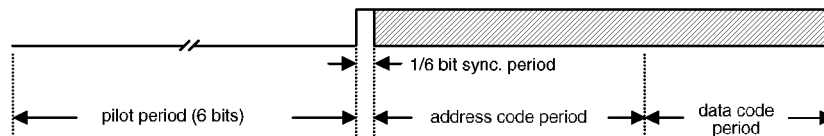

Composition of information

Address/data waveform

Each programmable address/data pin can be externally set to one of the following three logic states:

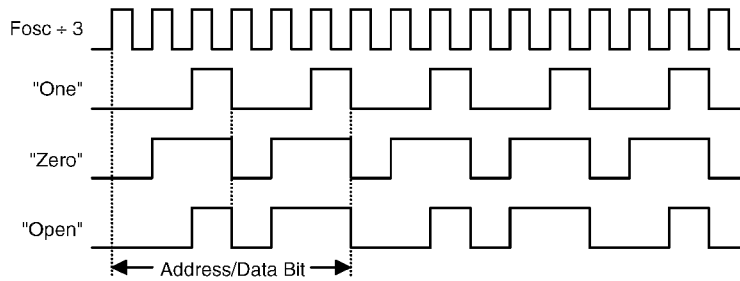

Address/Data bit waveform

The "Open" state data input is interpreted as logic high by the decoder since its output has only two states.


Address/data programming (preset)

The status of each address/data pin can be individually preset to a logic "high", "low", or "floating". If a transmission enable signal is applied, the encoder scans and transmits the status of the 12 bits of address/data serially in the order A0 to AD11 for the HT6010/HT6013 and A0 to D11 for the HT6012/HT6014/HT6015.

There are some packaging limitations. The HT6015 DIP with 18-pin, for example, offers 2 external data bits and 8 external address bits. The remaining unpackaged bits or dummy codes are treated as floating for the A0~AD11 or as pull-high for the D8~D11. During a data transmission these bits are still located in their original position. If the trigger signal is not applied, the chip only consumes a standby current which is less than 1µA (for VDD=5V).

The address pins are usually preset so as to transmit data codes with their own particular security codes by the DIP switches or PCB wiring, while data is selected by the push button or electronic switches.

The following figure illustrates an application using the HT6015:

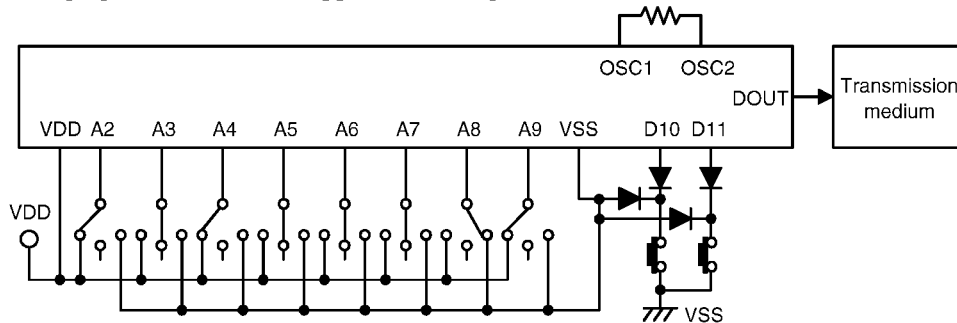

The transmitted data is as shown:

Pilot & Sync.	A0	A1	A2	A3	A4	A5	A6	A7	A8	A9	D10	D11
Z	Z	Z	1	Z	1	Z	Z	Z	0	1	1	0

Z: floating

Address/Data sequence

The following table provides the position of the address/data sequence for various models of the 3¹² series encoders. A correct device should be selected according to the requirements of individual address and data.


Part No.	Address/Data Bits											
	0	1	2	3	4	5	6	7	8	9	10	11
HT6010	A0	A1	A2	A3	A4	A5	A6	A7	AD8	AD9	AD10	AD11
HT6012	A0	A1	A2	A3	A4	A5	A6	A7	A8	A9	D10	D11
HT6013	—	—	A2	A3	A4	A5	A6	A7	A8	A9	AD10	AD11
HT6014	A0	A1	A2	A3	A4	A5	A6	A7	D8	D9	D10	D11
HT6015	—	—	A2	A3	A4	A5	A6	A7	A8	A9	D10	D11

Note: “—” is a dummy code which is left “open” and not bonded out.

Transmission enable

For the \overline{TE} trigger type of encoders, transmission is enabled by applying a low signal to the \overline{TE} pin. But for the Data trigger type, it is enabled by applying a low signal to one of the data pins D8~D11.


Flowchart

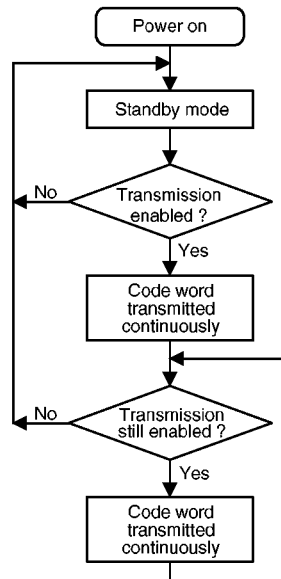

Note: D8~D11 are transmission enables of the HT6012/HT6014/HT6015.

\overline{TE} is the transmission enable of the HT6010/HT6013.

Oscillator frequency vs supply voltage

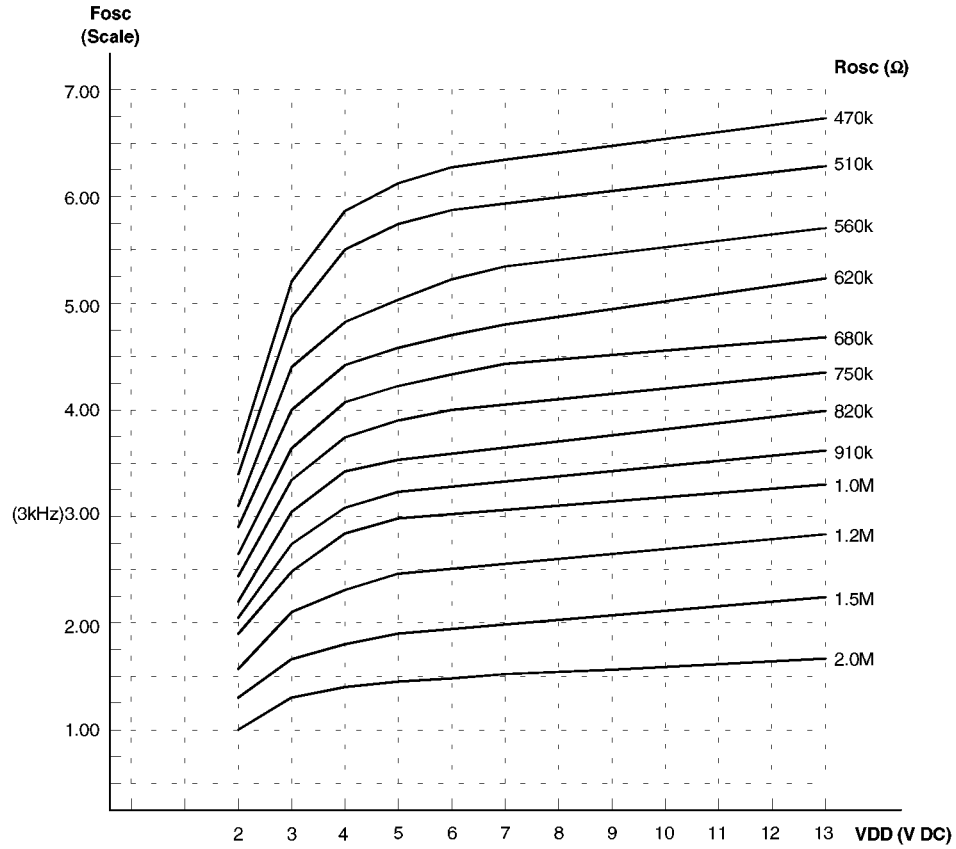


The recommended oscillator frequency is $F_{OSC D} (\text{decoder}) \cong 33 F_{OSC E} (\text{encoder})$.

Package Information


\overline{TE} trigger type

**8-Address
4-Address/Data**




**HT6010
- 18 DIP**

**8-Address
4-Address/Data**



**HT6010
- 20 DIP/SOP**


**8-Address
2-Address/Data**



**HT6013
- 16 DIP/SOP/NSOP**


DATA trigger type

**10-Address
2-Data**




**HT6012
- 18 DIP**

**10-Address
2-Data**




**HT6012
- 20 SOP**

**8-Address
4-Data**




**HT6014
- 18 DIP**

**8-Address
4-Data**







**HT6014
- 20 SOP**


**8-Address
2-Data**



**HT6015
- 16 DIP/SOP/NSOP**

Application Circuits

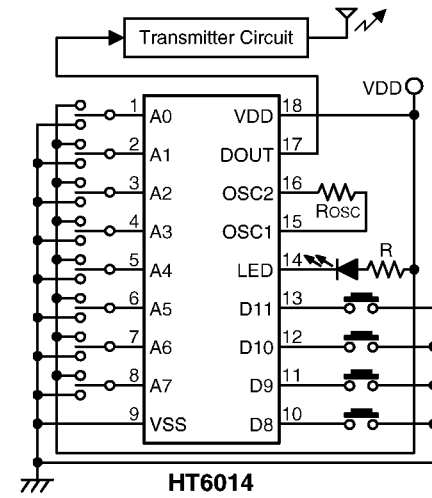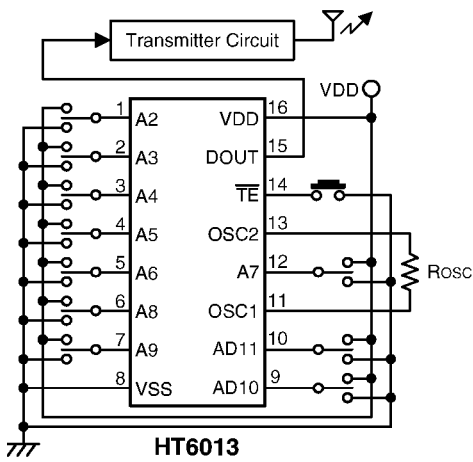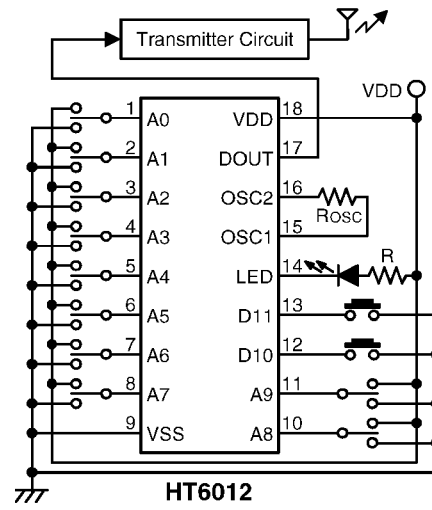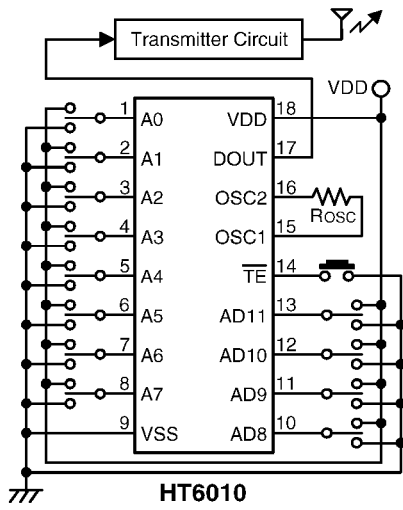

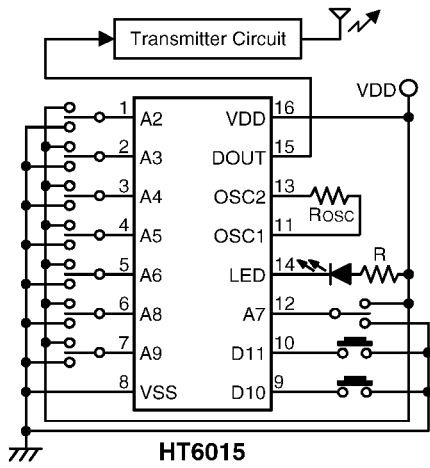

Note: Typical infrared diode: EL-1L2 (KODENSHI CORP.)
 Typical RF transmitter: JR-220 (JUWA CORP.)
 TX-99 (MING MICROSYSTEM, U.S.A.)