



### TYPES T AND YAD

#### HYLUG™

#### UNINSULATED COMPRESSION TERMINAL, RING TONGUE

The Type T uninsulated terminals are constructed of pure electrolytic copper. Designed with a long brazed seam barrel, standard neck, deep V groove inner serrations and electro-tin plated. The terminals are ideal for control wiring and other standard duty applications.

The ring tongue provides a secure termination under the screw head that cannot be removed without the complete removal of the screw. Two or more terminals can easily be stacked on a common stud.

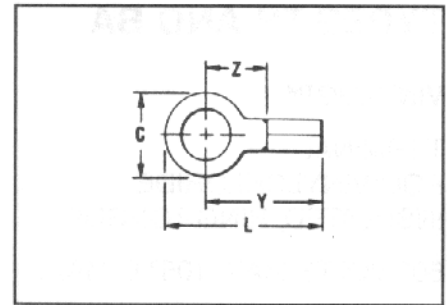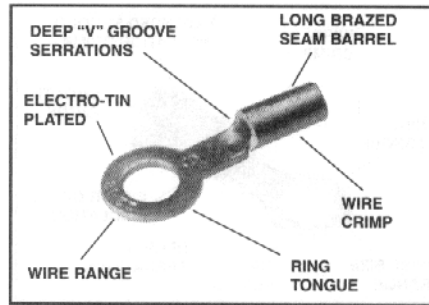

#### Features and Benefits

- Constructed of pure electrolytic copper.
  - ◊ Provides maximum conductivity, low resistance and ductility for excellent crimp forming properties.
- Long brazed seam barrel and deep V groove inner serrations.
  - ◊ Provides optimum conductivity reliability and holding power after crimping.
- Electro-tin plated.
  - ◊ Provides durable long-lasting corrosion resistance.
- Wire range is clearly marked on terminal.
  - ◊ Provides easy identification.
- Inspection hole.
  - ◊ Provides an easy visual check of wire insertion.
- Long neck terminal.
  - ◊ Permits easy bending and stacking of several terminals on a common stud.

CATALOG NUMBER	WIRE RANGE	STUD SIZE	DIMENSIONS				BULK CATALOG NUMBER*	INSTALLATION TOOLING	TAPE MOUNTED CATALOG NO. 2000/Reel	INSTALLATION TOOLING	WIRE STRIP LENGTH
			C	L MAX.	Y MAX.	Z MIN.					
T18-4	22-18	3, 4	.25	.65	.53	.24	YAD18-4	Non-Ratchet: Y10D, Y10-22	YAD18-4M	TFM with DFM6D1 Die	9/32"
T18-6		4-6	.25	.65	.53	.24	YAD18-6		YAD18-6M		
T18-8		6-8	.31	.77	.61	.33	YAD18-8		YAD18-8M		
T18-10		8-10	.31	.77	.61	.33	YAD18-10	Ratchet: MR8G98, Y8MRB-1, MR20	YAD18-10M		
T18-14		1/4	.45	.96	.73	.44	YAD18-14		YAD18-14M		
T18-516		5/16	.45	.96	.73	.44	YAD18-516		YAD18-516M		
T18-38		3/8	.53	1.05	.78	.49	YAD18-38		YAD18-38M		
T14-4	20-14	3, 4	.25	.67	.55	.26	YAD14-4	Non-Ratchet: Y10D, Y10-22	YAD14-4M	TFM with DFM5D1 Die	9/32"
T14-6		4-6	.25	.67	.55	.26	YAD14-6		YAD14-6M		
T14-8		6-8	.31	.77	.61	.33	YAD14-8		YAD14-8M		
T14-10		8-10	.31	.77	.61	.33	YAD14-10	Ratchet: MR8G98, Y8MRB-1, MR20	YAD14-10M		
T14-14		1/4	.45	.96	.73	.44	YD14-14		YAD14-14M		
T14-516		5/16	.45	.96	.73	.44	YAD14-516		YAD14-516M		
T14-38		3/8	.53	1.05	.78	.49	YAD14-38		YAD14-38M		
T10-6	12-10*	4-6	.37	.83	.64	.29	YAD10-6	Non-Ratchet: Y10D, Y10-22	*YAD10-6M	TFM with DFM4D1 Die	11/32"
T10-8		6-8	.37	.83	.64	.29	YAD10-8		*YAD10-8M		
T10-10		8-10	.37	.83	.64	.29	YAD10-10		*YAD10-10M		
T10-14		1/4	.46	.97	.74	.39	YAD10-14	Ratchet: MR8G98, Y8MRB-1, MR20	*YAD10-14M		
T10-516		5/16	.53	1.02	.76	.41	YAD10-516		*YAD10-516M		
T10-38		3/8	.58	1.08	.79	.44	YAD10-38		*YAD10-38M		

\* NOTE: UL Listed for 14-10 when installed with MR8G98 and Y8MRB-1 tools only.  
• 1000 pcs/reel.