






P.O. Box 130, Frenchtown, NJ 08825
Phone 1-908-996-6841
FAX 1-908-996-3891

ELEVATOR SOCKETS

Useful to bring device to level desired from 1/4" to 1 1/4" height extension. Standard increments in stock shown in table. Special heights available.

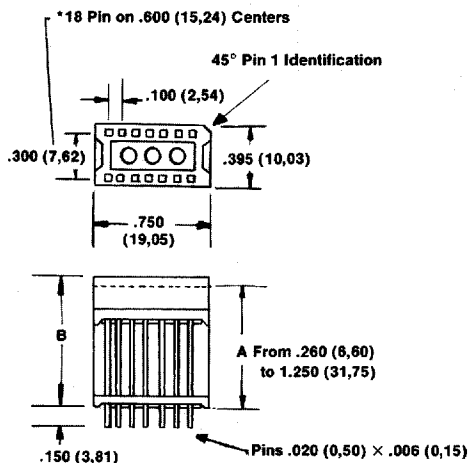


Part No.	A Dim.	B Dim.
14-8260-10	.260 (6,60)	.300 (7,62)
14-8350-10	.350 (8,89)	.390 (9,90)
14-8400-10	.400 (10,16)	.440 (11,17)
14-8435-10	.440 (11,17)	.480 (12,19)
14-8470-10	.470 (11,93)	.510 (12,95)
14-8510-10	.510 (12,95)	.550 (13,97)
14-8620-10	.620 (15,74)	.660 (16,76)
14-8770-10	.770 (19,55)	.810 (20,57)
14-8870-10	.870 (22,09)	.910 (23,11)
14-81000-10	1.000 (25,40)	1.040 (26,41)
14-81100-10	1.100 (27,94)	1.140 (28,95)
14-81187-10	1.180 (29,97)	1.220 (30,98)
14-81250-10	1.250 (31,75)	1.290 (32,76)
16-8430-10	.430 (10,92)	.470 (11,93)
16-8480-10	.480 (12,19)	.520 (13,20)
16-8700-10	.700 (17,78)	.740 (18,79)
16-8810-10	.810 (20,57)	.850 (21,59)
16-81250-10	1.250 (31,75)	1.290 (32,76)
18-88500-10	.500 (12,70)	.540 (13,71)
18-88587-10	.587 (14,90)	.627 (15,92)
18-88660-10	.660 (16,76)	.700 (17,78)
18-881250-10	1.250 (31,75)	1.290 (32,76)



** Available as Standard Aries Solder Socket (14-511-10)

HOW TO ORDER



Note: All sockets can be ordered without rails. Add suffix WR to catalog number.

ELEVATOR SOCKETS

Bifurcated Contacts

.300 (7,62) Mounting Centers, 14 and 16 Pin
.600 (15,24) Mounting Centers, 18 Pin

SPECIFICATIONS


Contacts: Grade A spring tempered phosphor bronze QQB-750
Plating: Available tin alloy plated only
Socket: Glass filled thermoplastic

No. of Pins	Dim A pins on .200 (5,08) centers	Dim A pins on .300 (7,62) centers	Dim A pins on .600 (15,24) centers	Dim B pins on .200 (5,08) centers	Dim B pins on .300 (7,62) centers	Dim B pins on .600 (15,24) centers	Dim C
6	.200 (5,08)	.300 (7,62)	.600 (15,24)	.200 (5,08)	.400 (10,16)	.700 (17,78)	.30 (7,62)
8	.200 (5,08)	.300 (7,62)	.600 (15,24)	.300 (7,62)	.400 (10,16)	.700 (17,78)	.40 (10,16)
10	.200 (5,08)	.300 (7,62)	.600 (15,24)	.300 (7,62)	.400 (10,16)	.700 (17,78)	.50 (12,70)
12	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	.60 (15,24)
14	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	.70 (17,78)
16	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	.80 (20,32)
18	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	.90 (22,86)
20	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.00 (25,40)
22	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.10 (27,94)
24	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.20 (30,48)
26	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.30 (33,02)
28	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.40 (35,56)
30	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.50 (38,10)
32	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.60 (40,64)
34	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.70 (43,18)
36	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.80 (45,72)
38	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	1.90 (48,26)
40	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	2.00 (50,80)
42	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	2.10 (53,34)
44	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	2.20 (55,88)
46	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	2.30 (58,42)
48	Special Only	.300 (7,62)	.600 (15,24)	Special Only	.400 (10,16)	.700 (17,78)	2.40 (60,96)

SPECIFICATIONS

Collet accepts: .015 (0,38) - .022 (0,55) dia. round leads
Contacts: Collet—Beryllium copper
Body—Brass


Plating: Contact: 30µ" (0,76µm) gold per MIL-G-45204 over 50µ" (1,27µm) nickel per QQN-290. Thicker gold plating available (consult factory).
Body: Tin plated
Platform Material: Glass filled thermoplastic UL94V0.

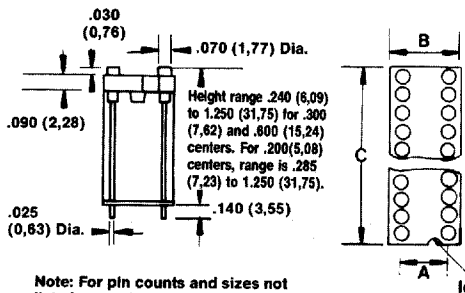


Note: For pin counts and sizes not listed, consult factory.

Consult factory for COLLET ELEVATORS on .200 (5,08), .400 (10,16), .500 (12,70) and .900 (22,86)

Description of Cat. No.

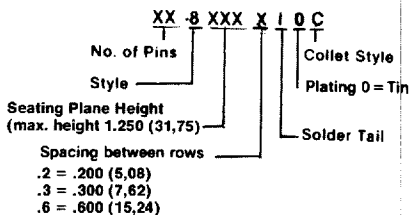

Style for .300 (7,62) and .600 (15,24) centers



Style for .200 (5,08) centers



ELEVATOR SOCKETS

Collet Contacts

.200 (5,08) Mounting Centers, 6-8-10 Pins
.300 (7,62) Mounting Centers, 14 and 16 Pin
.600 (15,24) Mounting Centers, 18 Pin
Special Sizes Available