


### Straight Male Cable Plug

Cable Type (RG/U)	Model Number	Fig.
405 (.085 Dia.)	<b>SSM-0085-92-000-02</b>	I
405 (.085 Dia.)	<b>SSM-0085-79-000-02</b>	II


Fig I = uses center conductor of cable  
Fig II = uses solder type center contact

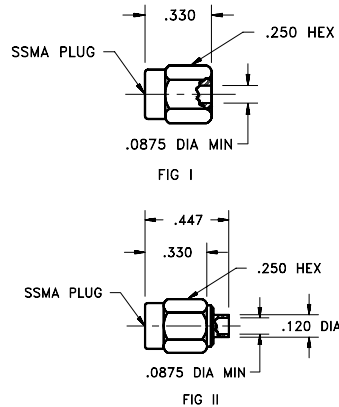

Note: Standard finish is gold plating on housing for direct solder to cable and passivated coupling nut.

### Straight Bulkhead Feedthru Female Cable Jack


Cable Type (RG/U)	Model Number
405 (.085 Dia.)	<b>SSM-0085-83-000-00</b>

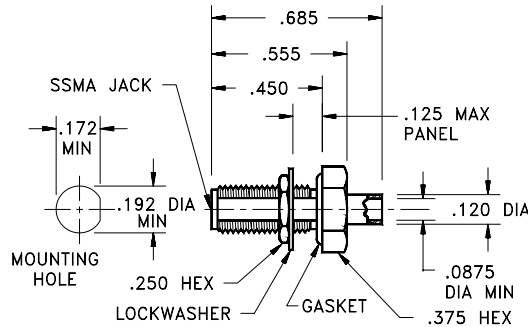

Note: Standard finish is gold plating for direct soldering to cable.

### Straight Panel Mount Female Cable Jack - 4 Hole


Cable Type (RG/U)	Model Number
405 (.085 Dia.)	<b>SSM-0085-84-000-00</b>

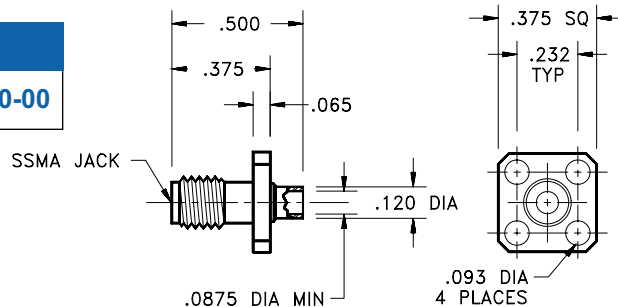

Note: Standard finish is gold plating for direct soldering to semi-rigid cable.

### Right Angle Male Cable Plug

Cable Type	Model Number
405 (.085 Dia.)	<b>SSM-0085-80-000-02</b>

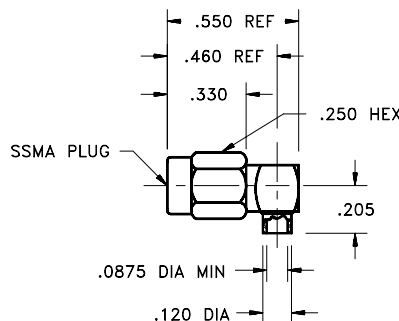

Note: Standard finish is gold plating on housing for direct solder to semi-rigid cable and passivated coupling nut.  
Detail interface dimensions and RG/U cable information can be found in the appendix.