


For CCFL Inverters
(Eliminates need for Ballast Caps)

Japan
Singapore
China

Series: **FJ16E, FJ16F, FJ16G**




■ Features

- Miniature and Thin 15×31×H4.5 mm (FJ16E)
- Automatic mounting capable
- Lead-free soldering (Reflow Temp. 260 °C peak)
- Eliminates the need for Ballast Caps

■ Recommended Applications

- LCD displays
- LCD TVs
- Car Navigation Systems

■ Example of Part Numbers

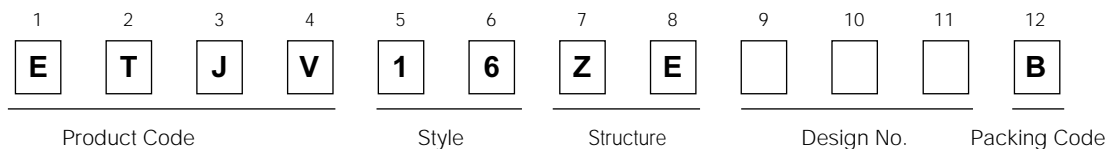

■ Package Style

Packaging	Tray Pack
Quantity	200 pcs. (50 pcs./tray×4)

■ Example of Application Characteristics by Self Oscillating Type

Type	Input Volt. * (V)	Max. Power * (W)	Efficiency * (%)	Open Volt. (Vrms)
FJ16E	6 to 15	4.0	75 to 85	1500
FJ16F		5.0		
FJ16G		6.0		

* This might be changed by usage conditions

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

