



Bridge Diodes (Schottky Barrier)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)							Others	
	V _{RM} (V)	I _F (AV) (A) With Heatsink	I _{FSM} (A)	T _J (°C)	Tstg (°C)	V _F (V)		I _R (mA)	I _R (H) (mA)	t _{rr} (ns)		Rth (j-c) (°C/W)	Mass (g)	Fig.
			50Hz Half-cycle Sinewave Single Shot							I _F (A)	V _R =V _{RM} max per element			
RBV-404B	40	4.0	40	-40 to +125		0.55	2.0	2.0	20	100	100/100	5.0	4.25	
RBV-406B	60					0.62								
RBV-1004B	40	10.0	60			0.55	5.0	5.0	35 (Tj=125°C)					


RBV-404B

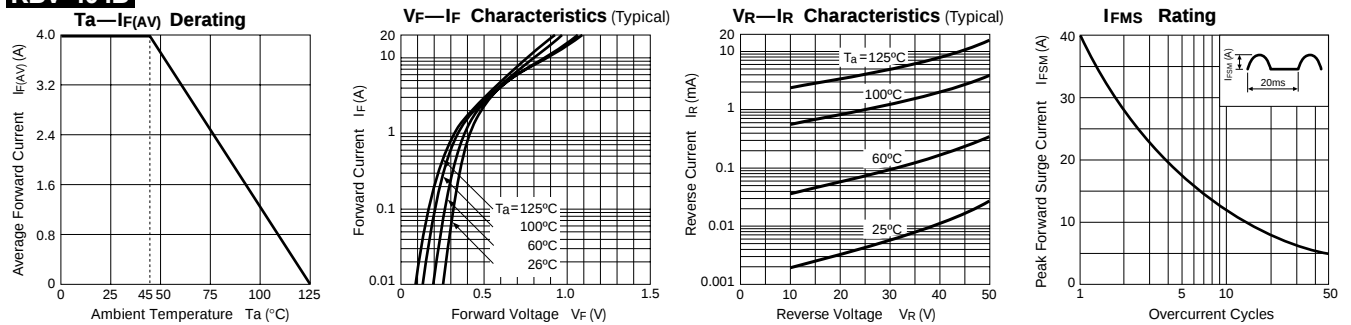

RBV-406B

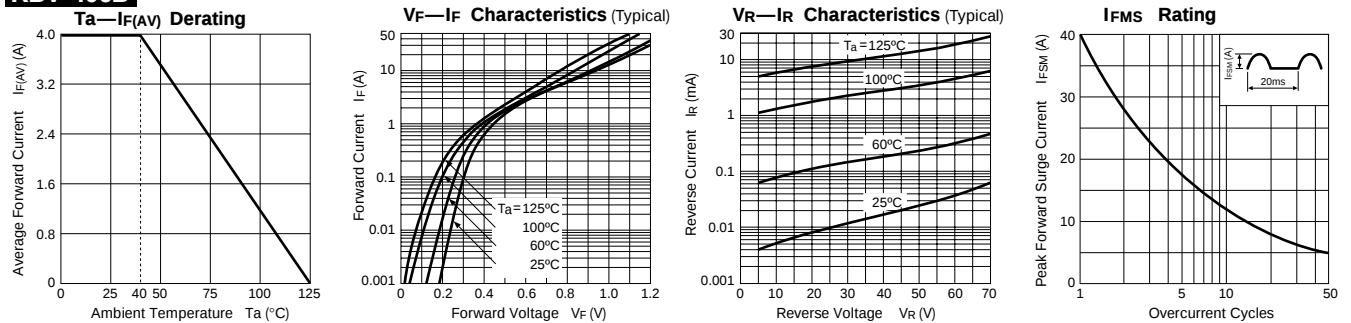

RBV-1004B

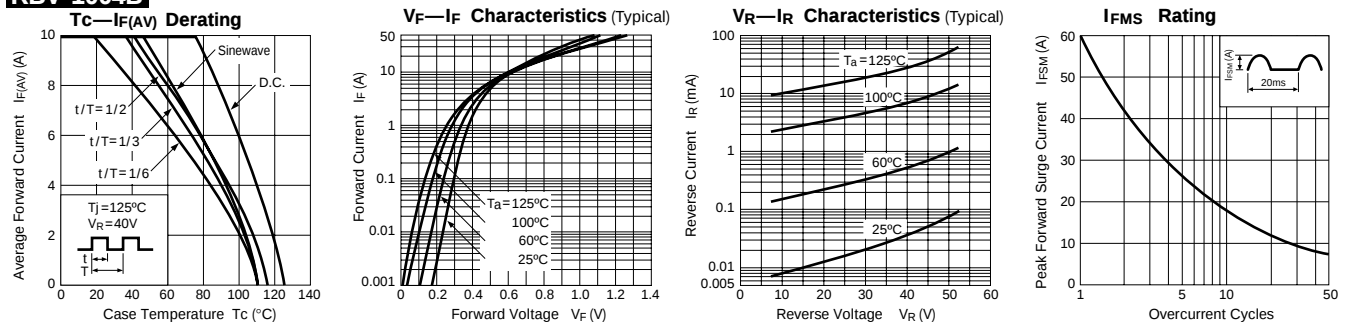

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

Fig. Ⓐ

