


## Typ ST39..

- 3,81 mm pin spacing
- 2 .. 16-poles single mold
- horizontal header
- not to be connected or disconnected under electrical load
- closed end
- also available with flange: Type ST39.. F

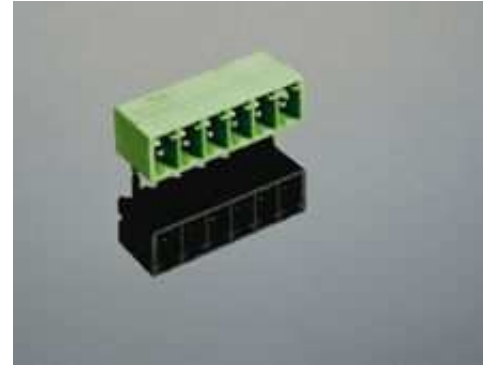

Rated voltage	<b>cULus</b> 300 V	<b>VDE</b> 160 V
Rated current	8 A	9 A
Rated impulse voltage/Pollution degree		2,5 kV /3
<b>Dimensions</b>	Spacing PCB hole diameter	3,81 mm 1,2 mm
<b>Materials</b>	Insulating material Flammability class Temperature range Contact pin	PA UL 94 V-0 -30°C/+105°C Cu
<b>Colour</b>	RAL 6018	green

### Dimensions

