


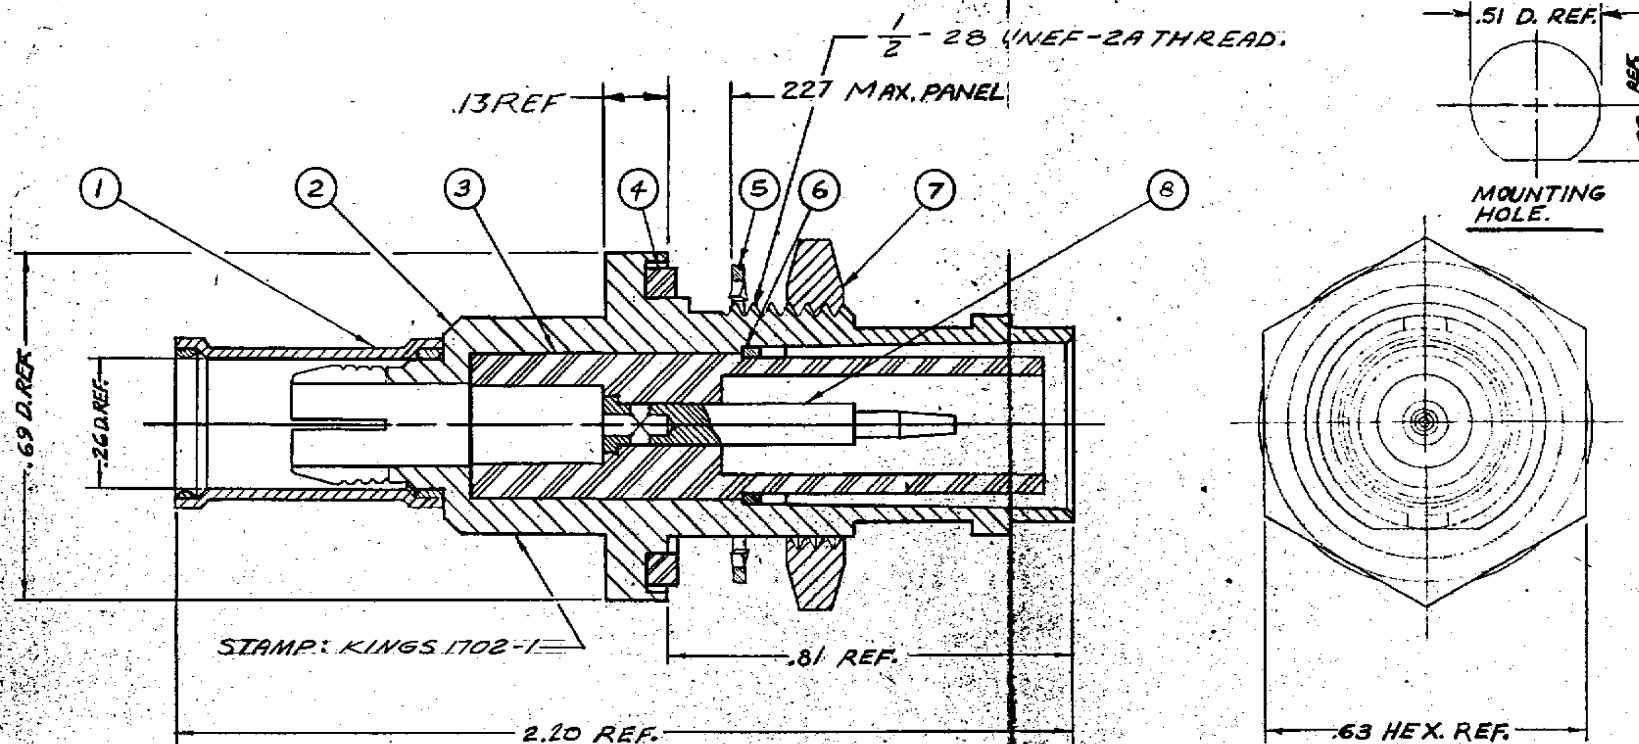

NOTES:

1. FOR USE WITH RG-59, 62 & 2101U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-441.
3. FOR CABLE TRIMMING USE KTJ-72 AND KTD-134.
4. FOR CRIMPING USE DIE SIZE 42.
5. ITEM ① TO HAVE M2T (RUBERIZE) AFTER PATING.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^{\circ} 30'$
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

8	1	SHV CRIMP CONTACT M	1-3/2-3-M29
7	1	HEX. NUT	492A-9-M06
6	1	RETAINING RING	
5	1	LOCKWASHER	492A-12-M06
4	1	GASKET	492A-10-M99
3	1	INSULATOR	
2	1	BODY	
1	1	W/P KGRIP SLEEVE (SEE NOTES)	C-59-228-5-M06
QTY	REQ'D	DESCRIPTION	DRAWING NO.

REVISIONS

ISSUE	CHANGES
0	ER 8307 MS 18 FEB 70
1	CN 8306 A L.R. 6/MAR. 70
2	FORMAT CN 10986C J.G.L. 7 APR 72
3	CN 11247A C.C. 20 JUN 72
4	CN 24956 C M.A. 18 AUG 83

REF:

FINISH

SPEC. KER-10004

MATL.

SPEC.

SHV BULKHEAD
JACK

DRAWN R. D. DATE 19 AUG 69
APPR. MS DATE 18 FEB 70

KINGS ELECTRONICS
40 WARSLEDALE ROAD
TUCKAHOE, N. Y. 10707

1702-1

S.D