


P.C. LAYOUT

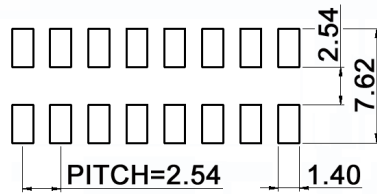

Part No.	A ±0.2
SBP 9202 JT	6.40
SBP 9203 JT	8.94
SBP 9204 JT	11.90
SBP 9205 JT	14.44
SBP 9206 JT	16.98
SBP 9207 JT	19.52
SBP 9208 JT	22.06
SBP 9210 JT	27.14

Specifications:

Contact rating: 100mA, 50V DC  
 Contact resistance: 50mOhm max.  
 Insulation resistance: 100MOhm min. at 500V DC  
 Dielectric strength: 500V DC for 1 minute  
 Operating temperature: -40°C to +85°C  
 Storage temperature: -40°C to +85°C  
 Mechanical life: 3 000 cycles  
 Electrical life: 3 000 cycles  
 Operating force: 600g max.  
 Resistance to soldering heat: 255 +/-5°C, 5 +/-1sec.

RoHS compliant

Material:

Cover / base: thermostable PA66 UL94V-0, black  
 Actuator: thermostable PA66 UI94V-0, white  
 Terminal contact: brass, gold plated  
 Movable contact: copper alloy, gold plated  
 Terminal: brass, tin plated

Maßstab	Datum	Name	SBP 9200 JT	
Oberfläche	01/06	dr		
			30 07 53	
			Blatt	
			1/1	
Zust	Änderung	Datum	Name	