


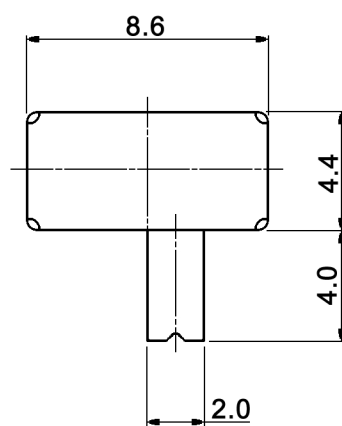
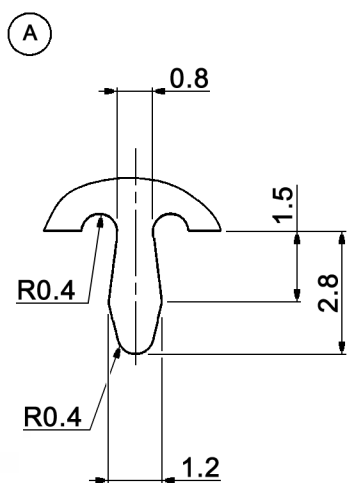
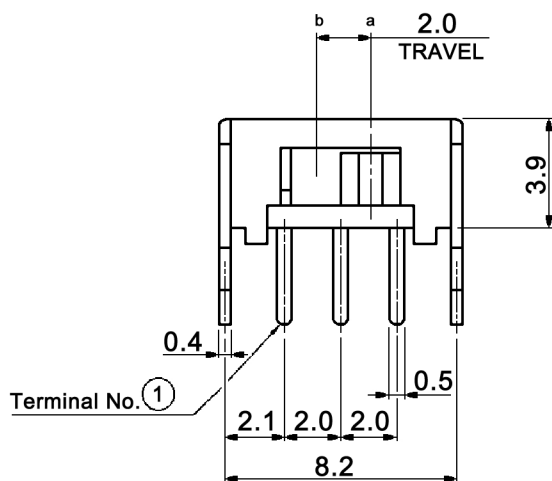


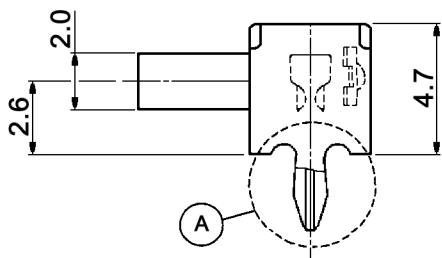

CIRCUIT DIAGRAM
C: COMMON PIN
BOTTOM VIEW



HOLE LAYOUT ± 0.05

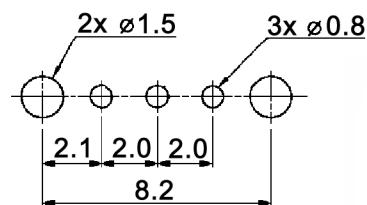

Specifications:

Contact rating:	0.1A, 12V DC
Contact resistance:	500mOhm max.
Insulation resistance:	100MOhm min. at 500V DC for 1 minute
Dielectric strength:	500V AC (50/60Hz, 2mA) for 1 minute
Operating temperature:	-40°C to +85°C
Storage temperature:	-40°C to +85°C
Mechanical life:	10 000 cycles
Soldering conditions:	260 +/-5°C, 5 +/-1sec.
Material:	Spring plate: phosphor bronze, washing Contact clip: phosphor bronze, silver plated Slider: PA46, black Terminal: brass strip, silver plated Base: phenolic resin, natural Frame: steel, nickel plated



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name
			05/12	dr
Temperatures	12/12	dr		
Modifications	Date	Name		

MFP 113 D-RA

knitter-switch

30 26 36

Page

1/1