


4 3 2 1

CONNECTOR P/N	DESCRIPTION
MA1-MMDR-001-FD	FULL DETENT
MA1-MMDR-001-SB	SMOOTH BORE

COMPONENT	MATERIAL	FINISH
HOUSING AND PIN	BREL PER ASTM B 196 AND/OR ASTM B 197 AND UNS #017500 DR UNS #0172000	GR. B PLATE PER ASTM B 489, TYPE 1 GRADE C-160050 TO 160100 THICK DUE TO NICKEL PER AMS QQ-N-290 DR AMS 2404 000050 TO 000150 THICK.
INSULATOR(S)	PTFE/PELOND PER ASTM D 1710 AND ASTM D 1457	N/A
SHROUD	ORSS 303 PER ASTM A-484 AND ASTM A-582 DR ASTM A-555 DR ASTM A-581	PASSIVATE PER AMS QQ-P-35.

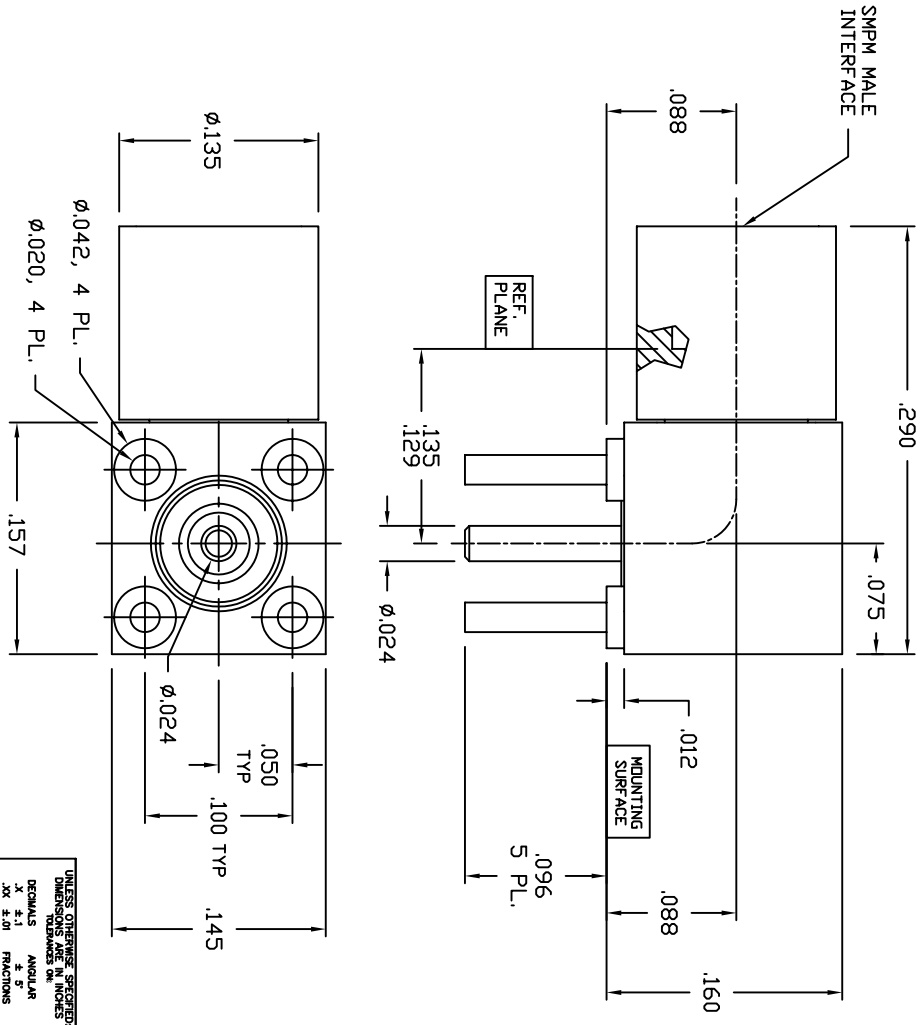

REV. NO.		DESCRIPTION		DATE		RELEASED	
01	A	INITIAL RELEASE					

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES DECIMALS ANGULAR TOLERANCES ON: .XX ± .005 ± 1/32 DO NOT SCALE DRAWING

PRODUCT CODE	MMD1	DATE	5/20/02
DRAWN	DME	CHECK	DME
APPROVED	DME	DATE	5/20/02

CAD FILENAME: CADTILENAME

THIRD ANGLE PROJECTION

**CRISTEK** 1300 S. LINDS STREET  
MILWAUKEE, WI 53207  
(714) 618-2000

TITLE: SMPM R/A PCB MOUNT

SIZE: C67720 CASE NO.: 01-MA1-DWG. NO.: MMDR-001 SCALE: NONE SHEET 1 OF 1