

DC BLOCKS

2.4mm

100 MHz - 50 GHz
75 VOLTS



MODELS: 8177, 8178, & 8179

SPECIFICATIONS:

Electrical:


Frequency Range _____ 100 MHz – 50 GHz
 Insertion Loss _____ 1.5 dB Max.
 VSWR _____ 1.75:1 Max.
 Impedance _____ 50 Ohms
 Voltage Rating _____ 75 Volts
 Operating Temp Range _____ +5°C to +75°C

Mechanical:


2.4mm Connectors _____ Gold Plated Beryllium Copper
 (Mates with 1.85mm & V* Connectors)
 Conductors _____ Gold Plated Beryllium Copper
 Barrel & Coupling Nut** _____ Passivated Stainless Steel

Overall lengths are with coupling nut biased fully forward (installed length).
 ** For a Gold Plated Barrel & Coupling Nut add /AU to the Model Number

Model Number: **8177**
Inner Only

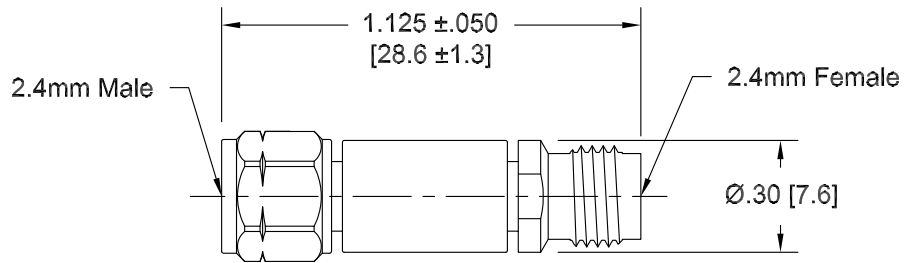

Model Number: **8178**
Outer Only

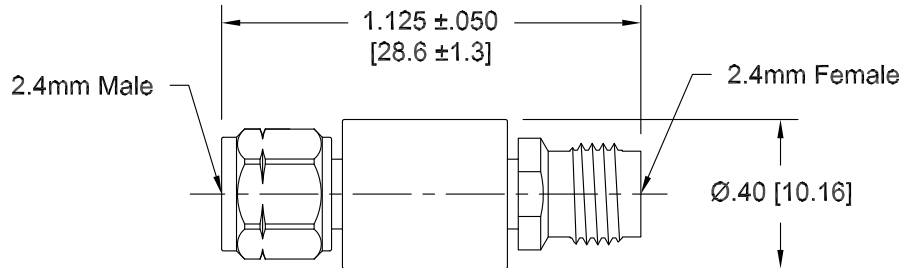

Model Number: **8179**
Inner/Outer

