


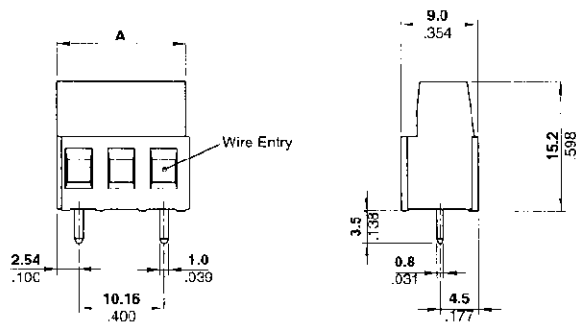


**BOARD MOUNT, SIDE WIRE ENTRY**

**Board Mount**  
**10.16 mm Centerline,**  
**Side Wire Entry**  
**Color – Green**  
**UL Rating – 600 V, 17.5 A**  
**12-30 AWG**  
**15 A for field wiring applications**



**Recommended PC Board Layout**






**Suggested Screw Torque—**  
 7.0 in.-lbs.


No. of Positions	Dim. A	Part Numbers
2	15.24 [0.600]	282843-2
3	25.40 [1.000]	282843-3
4	35.56 [1.400]	282843-4
5	45.72 [1.800]	282843-5
6	55.88 [2.200]	282843-6
7	66.04 [2.600]	282843-7

No. of Positions	Dim. A	Part Numbers
8	76.20 [3.000]	282843-8
9	86.36 [3.400]	282843-9
10	96.52 [3.800]	1-282843-0
11	106.68 [4.200]	1-282843-1
12	116.84 [4.600]	1-282843-2
13	127.00 [5.000]	1-282843-3

**Board Mount**  
**10.16 mm Centerline,**  
**Side Wire Entry**  
**Color – Green**  
**UL Rating – 600 V, 24 A**  
**12-30 AWG**

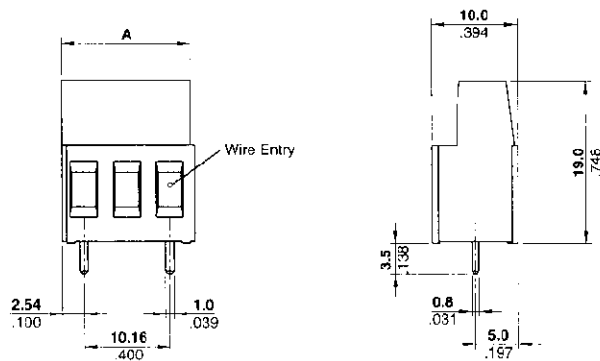

**Recommended PC Board Layout**



**Suggested Screw Torque—**  
 7.0 in.-lbs.

No. of Positions	Dim. A	Part Numbers
2	15.24 [0.600]	282859-2
3	25.40 [1.000]	282859-3
4	35.56 [1.400]	282859-4
5	45.72 [1.800]	282859-5
6	55.88 [2.200]	282859-6
7	66.04 [2.600]	282859-7

No. of Positions	Dim. A	Part Numbers
8	76.20 [3.000]	282859-8
9	86.36 [3.400]	282859-9
10	96.52 [3.800]	1-282859-0
11	106.68 [4.200]	1-282859-1
12	116.84 [4.600]	1-282859-2
13	127.00 [5.000]	1-282859-3