

**SGF29**

For C to Ku-band Local Oscillator and Amplifier


Features

- Lowest phase noise.
- The chip surface is covered with the highly reliable protection film.
- Super miniaturized plastic-mold package (CP4).
- Automatic surface mounting is available.

Package Dimensions

unit : mm

2134A

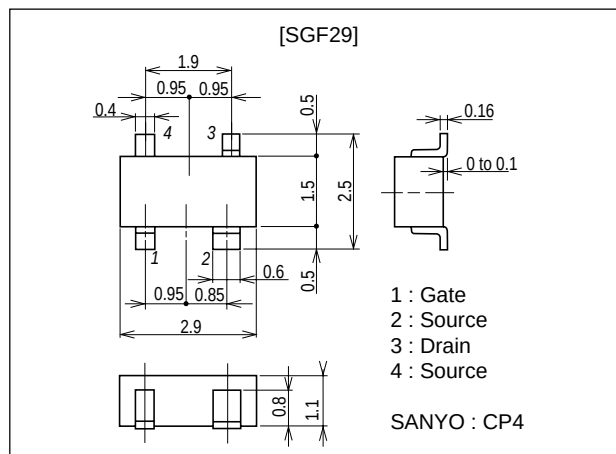

Specifications

Absolute Maximum Ratings at $T_a=25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	V_{DS}		6	V
Gate-to-Source Voltage	V_{GS}		-5	V
Drain Current	I_D		100	mA
Allowable Power Dissipation	P_D		200	mW
Junction Temperature	T_j		150	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a=25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Gate-to-Source Leakage Current	I_{GSO}	$V_{GS}=-5\text{V}$			-10	μA
Saturated Drain Current	I_{DSS}	$V_{DS}=3\text{V}, V_{GS}=0$	30	50	70	mA
Gate-to-Source Cutoff Voltage	$V_{GS(off)}$	$V_{DS}=3\text{V}, I_D=100\mu\text{A}$	-0.5	-1.4	-2.5	V
Forward Transfer Admittance	$ y_{fs} $	$V_{DS}=3\text{V}, I_D=10\text{mA}$		44		mS

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

71502 TS IM / 11802 GI IM / 91001 GI IM No.7054-1/5

SGF29

S-Parameter

SGF29

V_{DS}=3V I_{DS}=30mA

FREQUENCY MHz	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
3000.0000	.605	-139.1	3.198	72.5	.103	31.6	.431	-43.5
4000.0000	.546	-167.5	2.686	53.3	.114	28.7	.352	-57.1
5000.0000	.535	167.9	2.338	35.2	.127	24.2	.296	-72.1
6000.0000	.551	145.9	2.060	17.6	.146	18.5	.245	-90.5
7000.0000	.585	126.4	1.834	.4	.169	10.6	.201	-114.8
8000.0000	.630	109.1	1.649	-16..4	.192	1.1	.172	-147.1
9000.0000	.677	93.6	1.491	-32.7	.212	-9.2	.171	174.9
10000.0000	.723	79.4	1.350	-48.5	.230	-19.7	.204	140.1
11000.0000	.765	66.4	1.222	-63.9	.247	-30.3	.260	113.0
12000.0000	.803	54.2	1.106	-78.8	.263	-41.4	.328	91.7
13000.0000	.837	42.5	.999	-93.4	.276	-53.0	.401	73.9
14000.0000	.865	30.9	.899	-107.9	.285	-65.0	.474	58.2
15000.0000	.887	19.4	.800	-122.3	.288	-76.8	.545	43.8
16000.0000	.908	8.4	.675	-136.6	.288	-87.6	.633	30.1


SGF29

V_{DS}=3V I_{DS}=30mA


FREQUENCY MHz	G _U dB	G _A dB	S ₂₁ ² dB	S ₁₂ ² dB	K	Delay nsec	Mason's U dB	G ₁ dB	G ₂ dB
3000.0000	12.97		10.10	-19.73	.87	.055	21.072	1.98	.89
4000.0000	10.70	12.48	8.58	-18.85	1.04	.052	19.171	1.54	.58
5000.0000	9.24	10.57	7.38	-17.90	1.12	.050	17.886	1.46	.40
6000.0000	8.12	9.47	6.28	-16.70	1.11	.049	17.431	1.57	.27
7000.0000	7.27	8.93	5.27	-15.44	1.05	.048	18.036	1.82	.18
8000.0000	6.67		4.34	-14.35	.98	.046	20.510	2.19	.13
9000.0000	6.26		3.47	-13.47	.91	.045		2.66	.13
10000.0000	6.00		2.61	-12.76	.85	.044		3.21	.18
11000.0000	5.86		1.74	-12.14	.78	.042		3.82	.30
12000.0000	5.87		.87	-11.60	.71	.041		4.50	.49
13000.0000	6.00		-.01	-11.17	.63	.041		5.24	.76
14000.0000	6.18		-.92	-10.91	.56	.040		6.00	1.10
15000.0000	6.31		-1.94	-10.81	.50	.040		6.72	1.53
16000.0000	6.38		-3.41	-10.81	.44	.040		7.56	2.22

S-Parameter $V_{DS}=3V$ $I_{DS}=30mA$, START 3 GHz STOP 16 GHz


S11

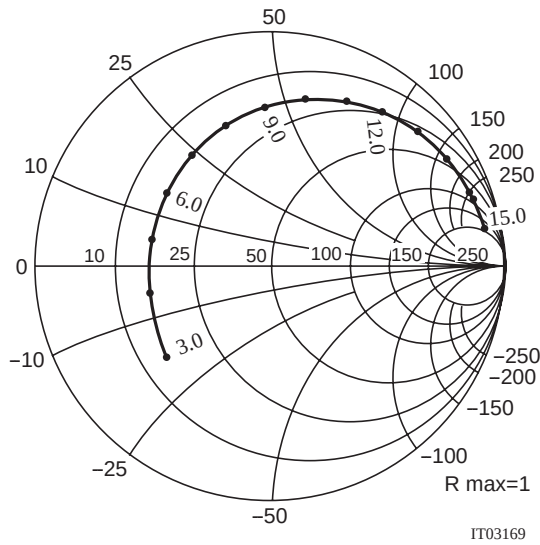


S21

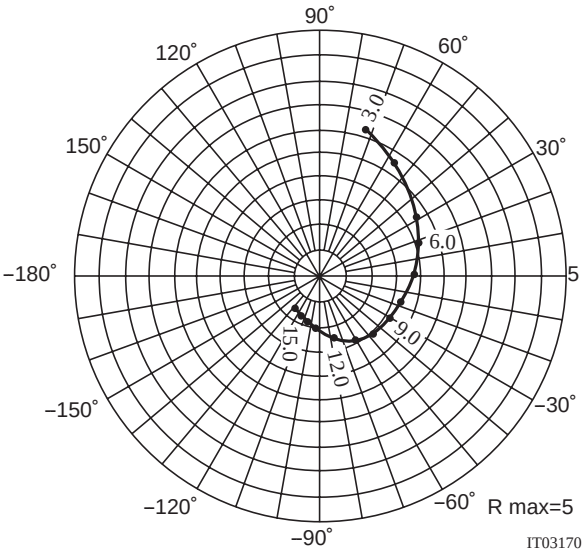

S12



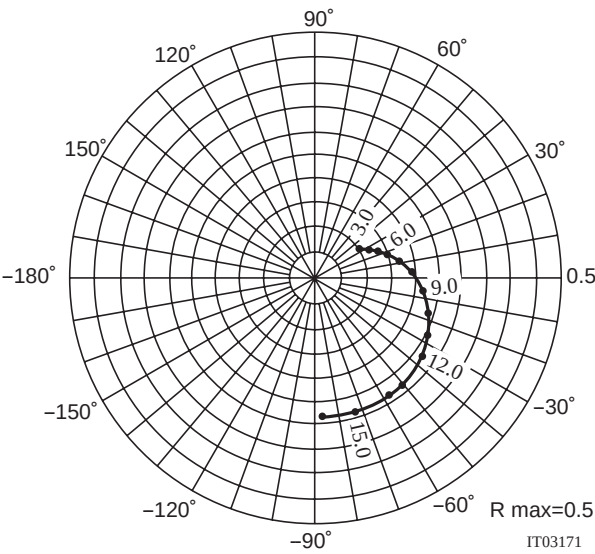


S22

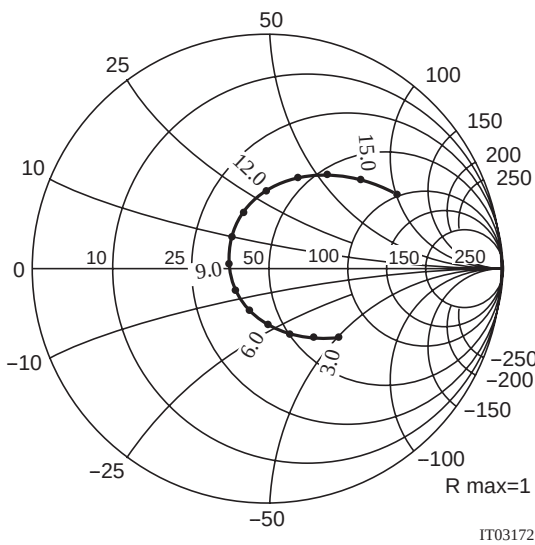


Oscillation Characteristics Measured by the Application JIG for SGF29

Equivalent Circuit of the Application JIG

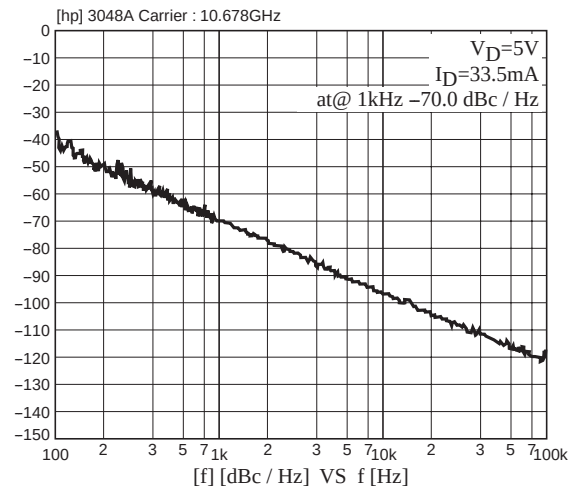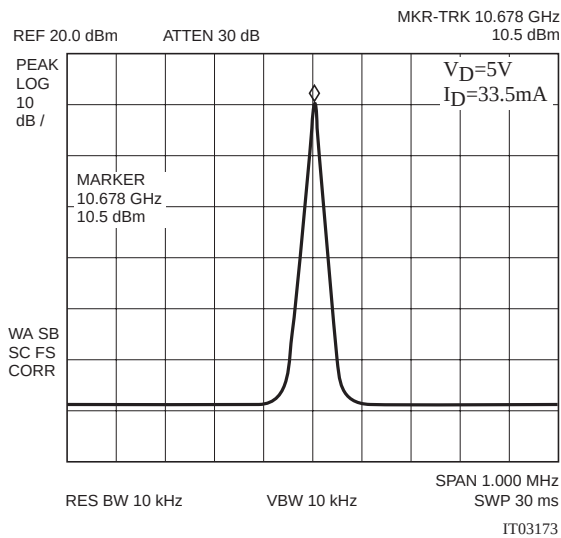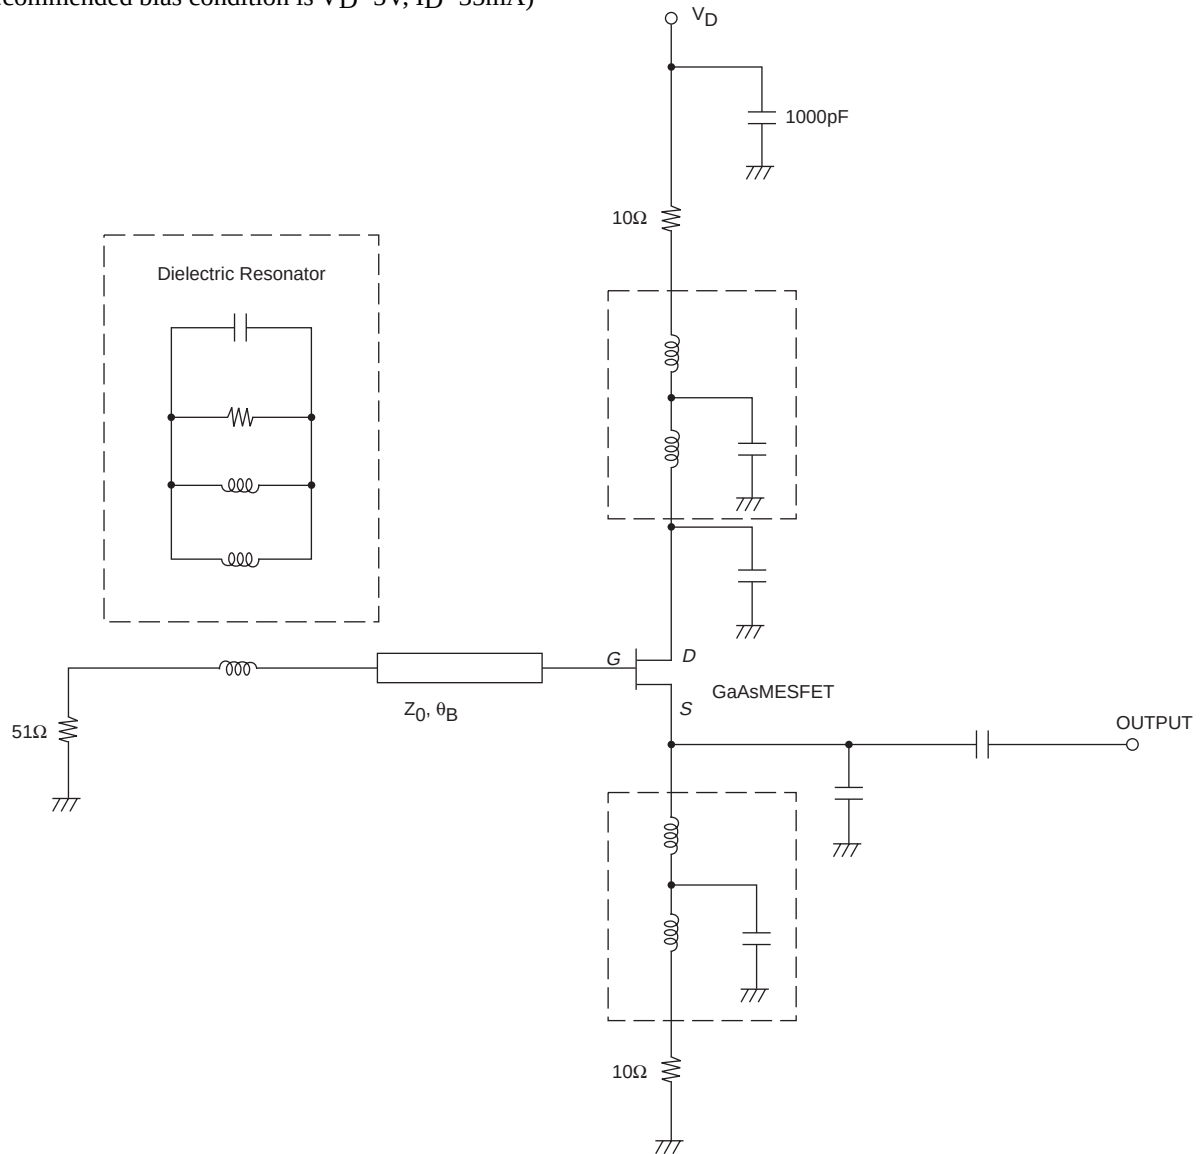(Recommended bias condition is $V_D=5V$, $I_D=35mA$)

IT03174

Amplification Characteristics Measured by the DUT

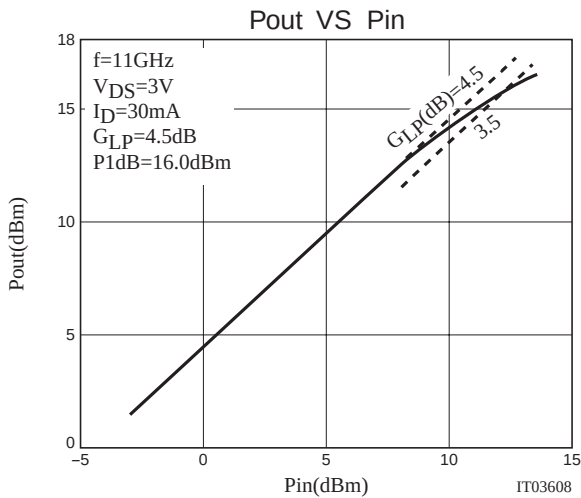

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 2002. Specifications and information herein are subject to change without notice.