


SD

3155-4-5

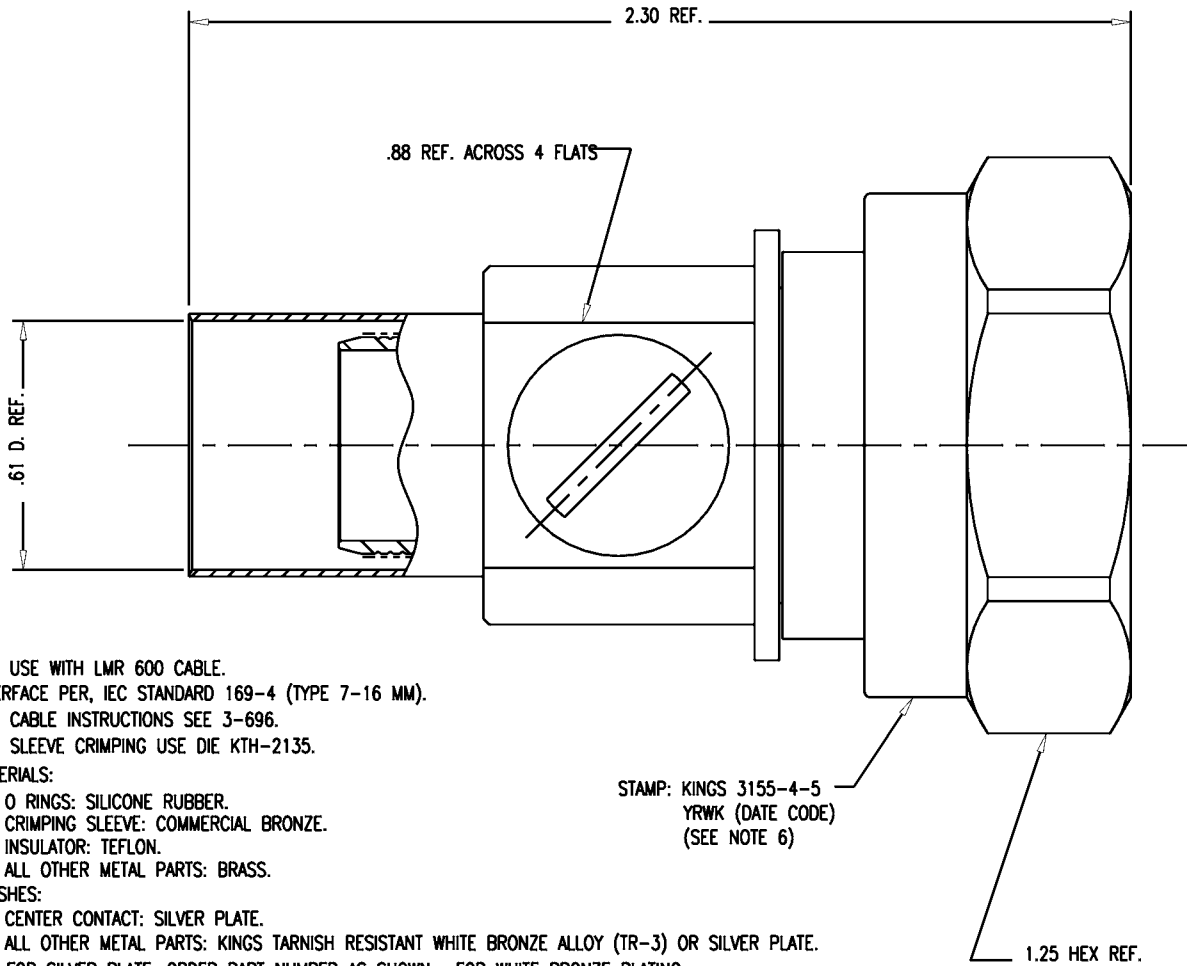

NOTES:

1. FOR USE WITH LMR 600 CABLE.
2. INTERFACE PER, IEC STANDARD 169-4 (TYPE 7-16 MM).
3. FOR CABLE INSTRUCTIONS SEE 3-696.
4. FOR SLEEVE CRIMPING USE DIE KTH-2135.
5. MATERIALS:
O RINGS: SILICONE RUBBER.
CRIMPING SLEEVE: COMMERCIAL BRONZE.
INSULATOR: TEFLON.
ALL OTHER METAL PARTS: BRASS.
6. FINISHES:
CENTER CONTACT: SILVER PLATE.
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT WHITE BRONZE ALLOY (TR-3) OR SILVER PLATE.
FOR SILVER PLATE, ORDER PART NUMBER AS SHOWN. FOR WHITE BRONZE PLATING, ADD "MJ3" SUFFIX TO THE PART NUMBER SHOWN, FOR EXAMPLE 3155-4-5 MJ3.
7. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS.
FREQUENCY RANGE: DC TO 4 GHz.
OPERATING VOLTAGE: 2700 VRMS.
8. SUPPLIED WITH A 3 INCH LENGTH OF ADHESIVE SHRINK TUBING.

REVISIONS

ISSUE	CHANGES
0	ER 38188 HVN 01/22/01
1	CN 38377 A HVN 08/14/01
2	CN 38437 E TML 12/06/01

3155-4-5S

SCALE 3:1

APPROX SURFACE AREA

USED ON

REF:

7-16 PLUG (LMR 600)

DRAWN HVN DATE 03/08/01

DESIGN LI DATE 01/04/01

APPR. DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

3155-4-5

SD