


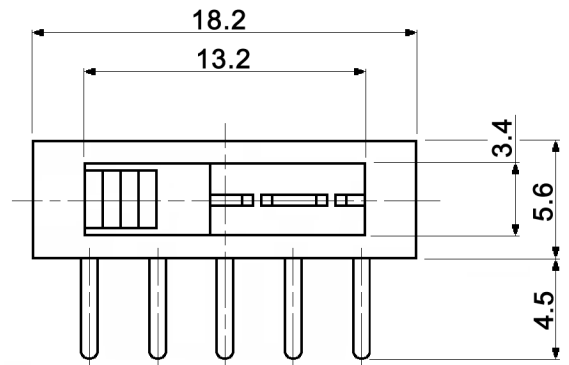
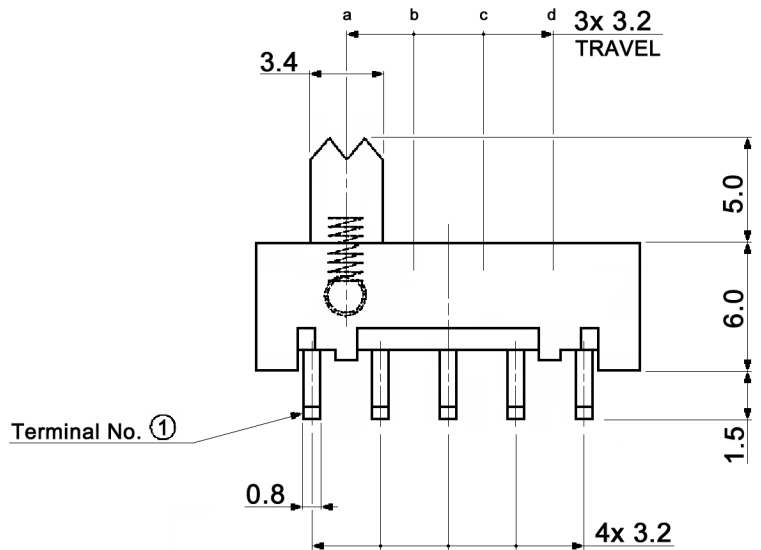


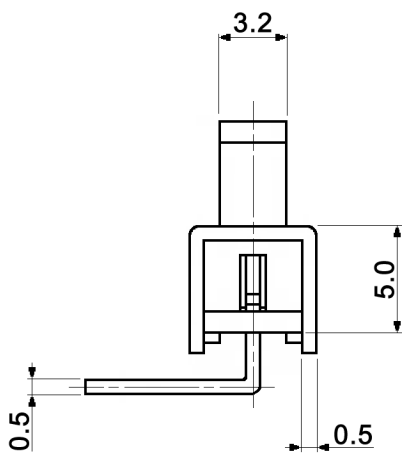

HOLE LAYOUT ± 0.05

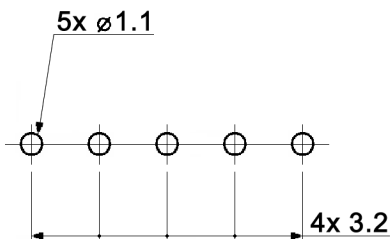

CIRCUIT DIAGRAM
BOTTOM VIEW



Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	MFP 140-R			
			01/02	us				
			knitter-switch			30 02 91		Page
Revised	06/14	dr						1/2
Modifications	Date	Name						

Specifications:

Contact rating: 0.3A, 30V DC
Contact resistance: 20mOhm max.
Insulation resistance: 100MOhm min. at 500V DC
Dielectric strength: 500V AC for 1 minute (50/60Hz)
Operating temperature: -10°C to +60°C
Mechanical life: min. 10 000 cycles
Operating force: 300 +/-150gf
Soldering conditions: wave soldering: 260 +/-5°C, 5 +/-1sec.
Contact timing: non-shorting
Material: Terminal: brass, silver plated
Base: phenolic, natural
Frame: steel, nickel plated
Contact plate: brass, silver plated
Spring: SWC, temper
Slider: PA, black

Packaging: Part weight 1.32g per piece
700 pcs. per bag
2 bags per carton-box 23x8x15cm
10 carton-boxes per outer carton 45x24x33cm, gross weight 20.1kg

Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	MFP 140-R			
			01/02	us				
			knitter-switch			30 02 91		Page
								2/2
Modifications	Date	Name						