



# ZRSSL2.5-1L1RS

- 2 Connections

## Technical Data


Wire sizes		Insulating Material	
Solid min	0.5 mm <sup>2</sup>	Material	PA 6.6
Solid max	4.0 mm <sup>2</sup>	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.5mm <sup>2</sup>	Temperatures	
Stranded (flexible) max	4.0 mm <sup>2</sup>	Working Temperature	-40 - 120 °C
Stranded with Ferrule min	0.5 mm <sup>2</sup>	Dimensions	
Stranded with Ferrule max	2.5 mm <sup>2</sup>	Stripped Length	10.0 mm
Clamping Range min	0.5mm <sup>2</sup>	Width	5.1 mm
Clamping Range max	4.0 mm <sup>2</sup>	Height	38.5 mm
		Length	54.0 mm
		Height TS35 x 7.5	39.5 mm

## Electrical Data

### General


Cross Connection Channels	1
Test Pick off	1

## Colours



GREEN/YELLOW

## Connection Diagram

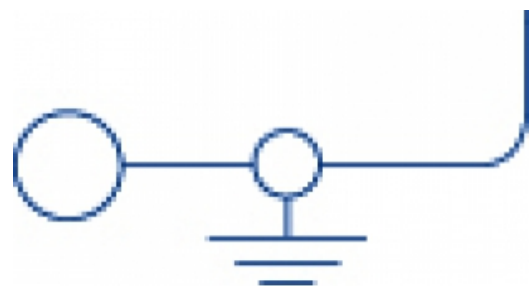

## Order Data

Article Designation	Article Number	PU
ZRSSL2.5-1L1RS-GREEN/YELLOW	43660.2	100
ZRSSL2.5-1L1RS-	43660	100

## Accessoires

Article Designation	Article Number	PU
End Plate ZAPS2.5/1A/1S	493680.2	50
Test Adapter ZTA2.5	493740.2	10
Four-Way Covers ZAD2.5/4/B	493706.0	20
End Stopn ZES35/2	493811.2	50
Quick Labelling PSB5/50	494600.7	500

## Ratings

Ratings	UR	CSA	IEC
Rated Voltage			
Rated Current			
Rated Wire Size	AWG 20-12	AWG 20-12	2.5 mm <sup>2</sup>
Rated Impulse Voltage			8 V
Pollution Degree			3