

# TYPES SN5453, SN54H53, SN7453, SN74H53 EXPANDABLE 4-WIDE AND-OR-INVERT GATES

REVISED DECEMBER 1983


- Package Options Include Plastic and Ceramic DIPs
- Dependable Texas Instruments Quality and Reliability

## description


These devices contain expandable 4-wide AND-OR-INVERT gates. The '53 perform the Boolean function  $Y = AB + CD + EF + GH + X$  and the 'H53 perform  $Y = AB + CD + EFG + HI + X$  with  $X =$  output of SN5460/SN7460, SN54H60/SN74H60 or SN54H62/SN74H62 respectively.

The SN5453 and SN54H53 are characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN7453 and SN74H53 are characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .


## logic diagrams

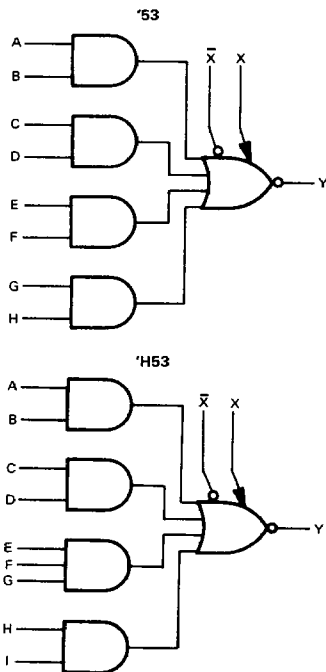


SN5453 ... J PACKAGE  
SN7453 ... J OR N PACKAGE




SN5453 ... W PACKAGE  
(TOP VIEW)



SN54H53 ... J PACKAGE  
SN74H53 ... J OR N PACKAGE  
(TOP VIEW)



SN54H53 ... W PACKAGE  
(TOP VIEW)




NC - No internal connection

3

TTL DEVICES

TYPES SN5453, SN54H53,  
SN7453, SN74H53  
**EXPANDABLE 4-WIDE AND-OR-INVERT GATES**

schematics

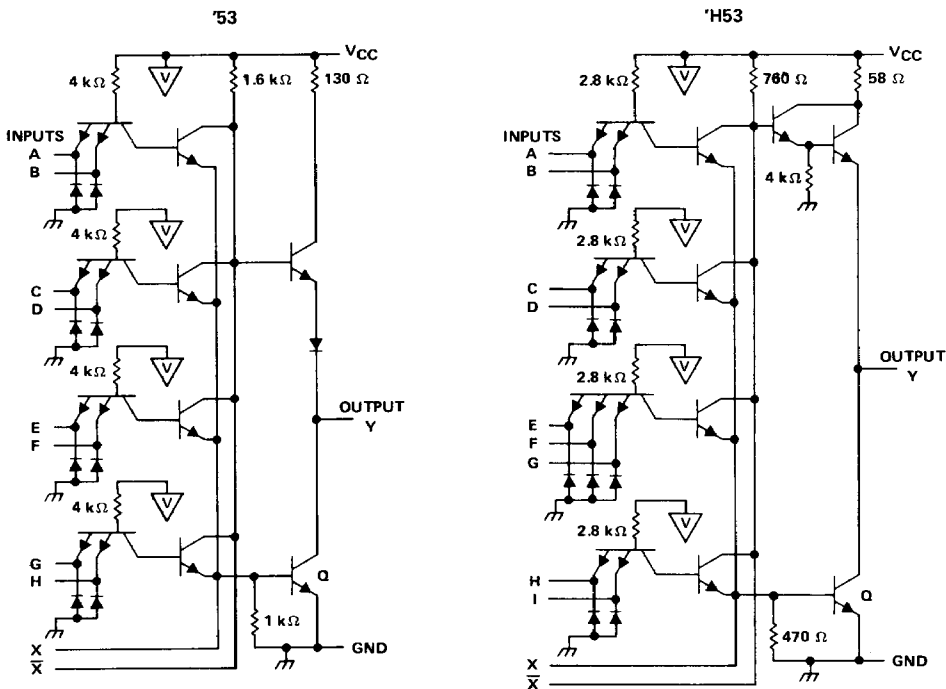

Resistor values shown are nominal.  
If expander is not used, leave X and  $\bar{X}$  open.

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)**

Supply voltage, $V_{CC}$ (see Note 1)	7 V
Input voltage	5.5 V
Operating free-air temperature range: SN54'	-55°C to 125°C
SN74'	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.

3

TTL DEVICES

# TYPES SN5453, SN7453 EXPANDABLE 4-WIDE AND-OR-INVERT GATES

## recommended operating conditions

	SN5453			SN7453			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub> Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V <sub>IH</sub> High-level input voltage	2			2			V
V <sub>IL</sub> Low-level input voltage	0.8			0.8			V
I <sub>OH</sub> High-level output current	-0.4			-0.4			mA
I <sub>OL</sub> Low-level output current	16			16			mA
T <sub>A</sub> Operating free-air temperature	-55			125			°C

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	SN5453			SN7453			UNIT	
		MIN	TYP‡	MAX	MIN	TYP‡	MAX		
V <sub>IK</sub>	V <sub>CC</sub> = MIN, I <sub>I</sub> = -12 mA	-1.5			-1.5			V	
V <sub>OH</sub>	V <sub>CC</sub> = MIN, V <sub>IL</sub> = 0.8 V, I <sub>OH</sub> = -0.4 mA	2.4	3.4		2.4	3.4	V		
V <sub>OL</sub>	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V, I <sub>OL</sub> = 16 mA	0.2	0.4		0.2	0.4	V		
I <sub>I</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 5.5 V	1			1			mA	
I <sub>IH</sub>	V <sub>CC</sub> = MAX, V <sub>IH</sub> = 2.4 V	40			40			μA	
I <sub>IL</sub>	V <sub>CC</sub> = MAX, V <sub>IL</sub> = 0.4 V	-1.6			-1.6			mA	
I <sub>OS</sub> §	V <sub>CC</sub> = MAX	-20		-55	-18		-55	mA	
I <sub>CCH</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 0 V	4			4			8	mA
I <sub>CCL</sub>	V <sub>CC</sub> = MAX, See Note 2	5.1			5.1			9.5	mA
I <sub>X</sub> ▲	V <sub>XX</sub> = 0.4 V, I <sub>OL</sub> = 16 mA	-2.9			-3.1			mA	
V <sub>BE(Q)</sub> ▲	I <sub>X</sub> +I <sub>X</sub> = 0.41 mA, R <sub>XX</sub> = 0, I <sub>OL</sub> = 16 mA	1.1						V	
	I <sub>X</sub> +I <sub>X</sub> = 0.62 mA, R <sub>XX</sub> = 0, I <sub>OL</sub> = 16 mA				1				
V <sub>OH</sub> ▲	I <sub>X</sub> = 0.15 mA, I <sub>X</sub> = -0.15 mA, I <sub>OH</sub> = -0.4 mA	2.4	3.4				V		
	I <sub>X</sub> = 0.27 mA, I <sub>X</sub> = -0.27 mA, I <sub>OH</sub> = -0.4 mA				2.4	3.4			
V <sub>OL</sub> ▲	I <sub>X</sub> +I <sub>X</sub> = 0.3 mA, R <sub>XX</sub> = 138 Ω, I <sub>OL</sub> = 16 mA	0.2	0.4				V		
	I <sub>X</sub> +I <sub>X</sub> = 0.43 mA, R <sub>XX</sub> = 130 Ω, I <sub>OL</sub> = 16 mA				0.2	0.4			

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

§ Not more than one output should be shorted at a time.

▲ Using expander inputs. V<sub>CC</sub> = MIN, T<sub>A</sub> = MIN, except typical values.

NOTE 2: All inputs of one AND gate at 4.5 V, all others at GND.

## switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS		MIN	TYP	MAX	UNIT	
t <sub>PLH</sub>	Any	Y	R <sub>L</sub> = 400 Ω,	C <sub>L</sub> = 15 pF ¶			13	22	ns
t <sub>PHL</sub>					8	15	ns		

¶ Expander pins open.

NOTE 3: See General Information Section for load circuits and voltage waveforms.

3 TTL DEVICES

# TYPES SN54H53, SN74H53, EXPANDABLE 4-WIDE AND-OR-INVERT GATES

## recommended operating conditions

	SN54H53			SN74H53			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub> Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V <sub>IH</sub> High-level input voltage	2			2			V
V <sub>IL</sub> Low-level input voltage	0.8			0.8			V
I <sub>OH</sub> High-level output current	-0.5			-0.5			mA
I <sub>OL</sub> Low-level output current	20			20			mA
T <sub>A</sub> Operating free-air temperature	-55			0			70 °C

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	SN54H53		SN74H53		UNIT
		MIN	TYP‡	MAX	MIN	
V <sub>IK</sub>	V <sub>CC</sub> = MIN, I <sub>I</sub> = -8 mA	-1.5		-1.5		V
V <sub>OH</sub>	V <sub>CC</sub> = MIN, V <sub>IL</sub> = 0.8 V, I <sub>OH</sub> = -0.5 mA	2.4	3.4	2.4	3.4	V
V <sub>OL</sub>	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V, I <sub>OL</sub> = 20 mA	0.2	0.4	0.2	0.4	V
I <sub>I</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 5.5 V	1		1		mA
I <sub>IH</sub>	V <sub>CC</sub> = MAX, V <sub>IH</sub> = 2.4 V	50		50		µA
I <sub>IL</sub>	V <sub>CC</sub> = MAX, V <sub>IL</sub> = 0.4 V	-2		-2		mA
I <sub>OS</sub> §	V <sub>CC</sub> = MAX	-40	-100	-40	-100	mA
I <sub>CCH</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 0 V	7.1 11		7.1 11		mA
I <sub>CCL</sub>	V <sub>CC</sub> = MAX, See Note 2	9.4 14		9.4 14		mA
I <sub>X</sub> ▲	V <sub>X</sub> = 1.4 V, I <sub>X</sub> = 0, I <sub>OL</sub> = 0	-5.85		-6.3		mA
V <sub>BEI(Q)</sub> ▲	I <sub>X</sub> +I <sub>X</sub> = 0.7 mA, R <sub>X</sub> X = 0, I <sub>OL</sub> = 20 mA	1.1		1		V
V <sub>OH</sub> ▲	I <sub>X</sub> +I <sub>X</sub> = 1.1 mA, R <sub>X</sub> X = 0, I <sub>OL</sub> = 20 mA					V
	I <sub>X</sub> = 0.32 mA, I <sub>X</sub> = -0.32 mA, I <sub>OH</sub> = -0.5 mA	2.4	3.4	2.4	3.4	V
V <sub>OL</sub> ▲	I <sub>X</sub> = 0.57 mA, I <sub>X</sub> = -0.57 mA, I <sub>OH</sub> = -0.5 mA					V
	I <sub>X</sub> +I <sub>X</sub> = 0.47 mA, R <sub>X</sub> X = 68 Ω, I <sub>OL</sub> = 20 mA	0.2	0.4	0.2	0.4	V
	I <sub>X</sub> +I <sub>X</sub> = 0.6 mA, R <sub>X</sub> X = 63 Ω, I <sub>OL</sub> = 20 mA					V

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

§ Not more than one output should be shorted at a time.

▲ Using expander inputs, V<sub>CC</sub> = MIN, T<sub>A</sub> = MIN, except typical values.

NOTE 2: All inputs of one AND gate at 4.5 V, all others at GND.

## switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>PLH</sub>	Any	Y	R <sub>L</sub> = 280 Ω, C <sub>L</sub> = 25 pF ¶	7	11	ns	
t <sub>PHL</sub>				6.2	11	ns	
t <sub>PLH</sub>			R <sub>L</sub> = 280 Ω, C <sub>L</sub> = 25 pF ¶, C = 15 pF #	11.4		ns	
t <sub>PHL</sub>				7.4		ns	

¶ Expander pins open.

# GND to X.

NOTE 3: See General Information Section for load circuits and voltage waveforms.

3

TTL DEVICES