
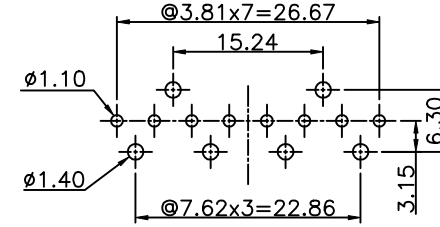

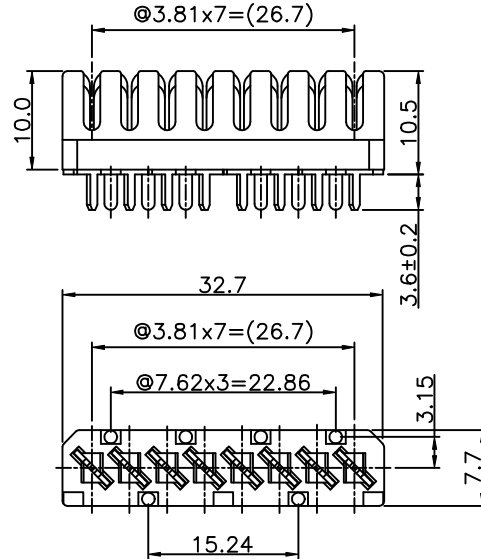


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

COLOR PRINT



PC Board Layout
Component Side Shown

P/N OPTION	COLOR PRINT			
	(1)	(2)	(3)	(4)
4	Blue (藍)	Orange (桔)	Green (綠)	Brown (棕)
5	Black (黑)	Red (紅)	Green (綠)	Yellow (黃)

Housing : PBT OR PPO OR PC
 Contact : Phosphor Bronze with silver plating
 Option : Phosphor Bronze with nickel plating
 or Beryllium copper with silver plating
 Wire : cable sizes :
 Solid copper wires up to 0.4mm - 0.8mm in dia.
 Insulation :
 PE or PVC insulated wire (100% PE/foam skin, filled/unfilled)
 up to 1.4mm in diameter
 Contact resistance : 10 Miniohms Max.
 Voltage Rating : 250 VDC
 Operating Temperature : -20°C to +125°C and Humldity up to 95%
 Insulation Resistance : 500 VDC, voltage applied 5000 Megohms Min.
 Dielectric Strength : AC 2000 Vrms
 PART NUMBER: E4808-000X1X

- A- TIN
- F- SILVER
- 3-無印刷
- 4-彩色印刷, 綠線桔藍
- 5-彩色印刷, 黑紅綠黃

舊圖號: 4-0099-1

DETACHED LISTS	MM (INCH)	DFTO YING	DATE 7/19/00'	FULL RISE ELECTRONIC CO., LTD
	TOLERANCES EXCEPT AS NOTED	CHKD zy	DATE 2004/10/28	
	MM	MFO	DATE	
	.0 ±0.2 ±	APPVL shv	DATE 2004/10/28	
.00 ±0.15 ±	MATERIAL :			TITLE
.000 ±0.075 ±	ANGLES ± 0.5	QT'Y :		INDC TERMINAL BLOCK 8P
THIRD ANGLE PROJECTION	FINISH :	SCALE : 5 : 1		DRAWING NO. GE483A07
				/PART NO. SEE NOTE
				SIZE A3
				REV 7/19/00'
				DO NOT SCALE DRAWING
				SHEET OF