

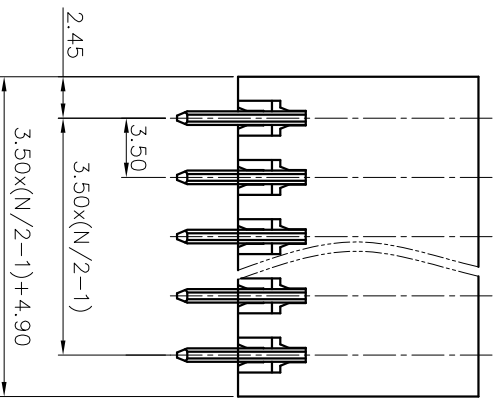
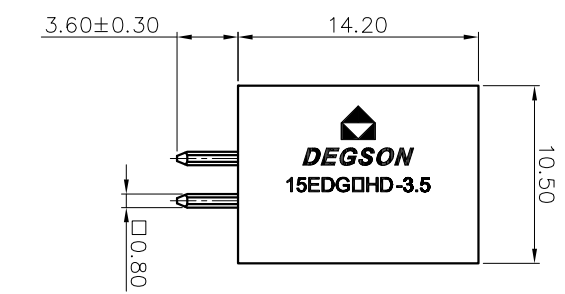


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE





- NOTES1:
- UL Standard
 - 1. Rated voltage/current : 150V / 10A
 - 2. Withstanding voltage : AC1300V/1Min.
- IEC Standard
- | Pollution degree | 2 | 2 | 3 |
|--------------------------|-------|-------|-------|
| Overvoltage category | II | III | III |
| Rate impulse voltage(KV) | 2.5KV | 2.5KV | 2.5KV |
| Rate voltage(V) | 250V | 125V | 80V |
| Rate current(A) | 10A | | |

- NOTES2:
- Dimension shall be interpreted per ASME Y14.5-2009
 - Pitch : 3.50mm, Poles : N=4~48P
 - Operating temperature: -40°C~+105°C
 - Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		Tolerance			
	mm	In mm				
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10
TO 10	TO 10	TO 10	TO 10	TO 10	TO 10	≤
6 TO 10	24 TO 30	60 TO 100	100 TO 150			±Z

5. RoHS Compliance

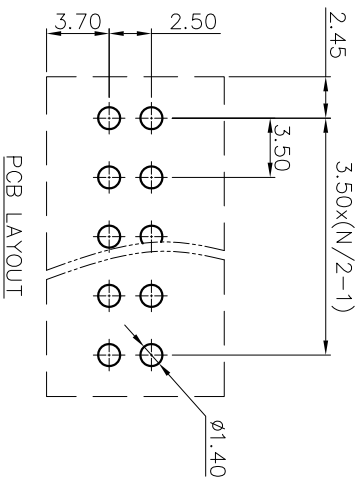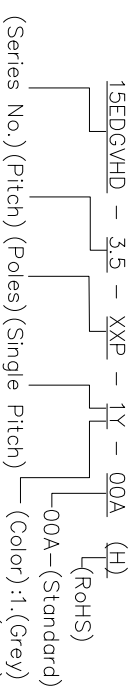

DETACHED LISTS				
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD:	/	CHKD:	/	
DRFT:	/	TITLE:	CUSTOMER DRAWING	REV
THIRD ANGLE PROJECTION		DRAWING NO.:	/	SHEET
		DO NOT SCALE DRAWING	SCALE	DO
	1X1 (INCH)		1:1	1/1